



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.9325	1.2122	0.6666	0.3824	0.2445

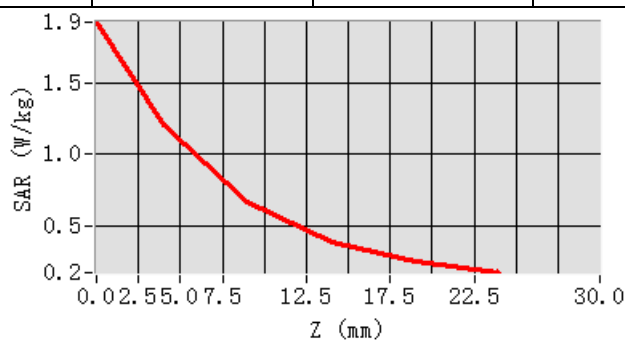

Hot spot position

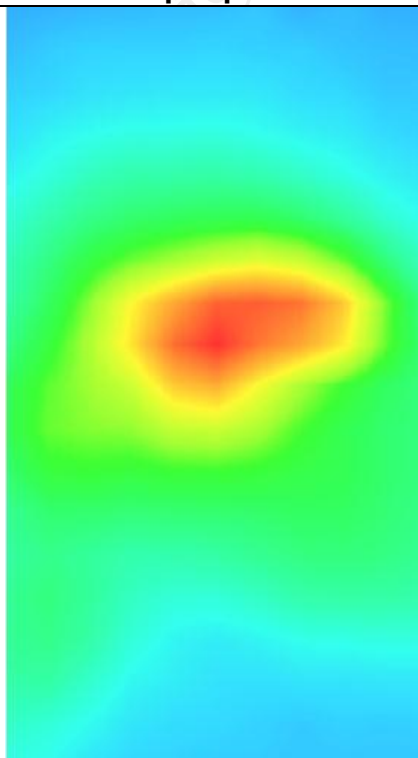

WCDMA Band IV


MEASUREMENT 1

Middle Band SAR (Channel 1450):


Date: 03/18/2022

Frequency (MHz)	1740.000000
Relative permittivity (real part)	53.342521
Relative permittivity (imaginary part)	14.225400
Conductivity (S/m)	1.492530
Variation (%)	0.210000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPGO346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body front(10mm)
Band	BAND4 WCDMA1700

SURFACE SAR

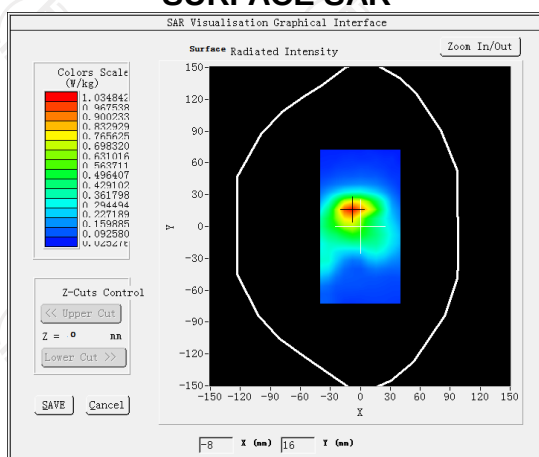


VOLUME SAR

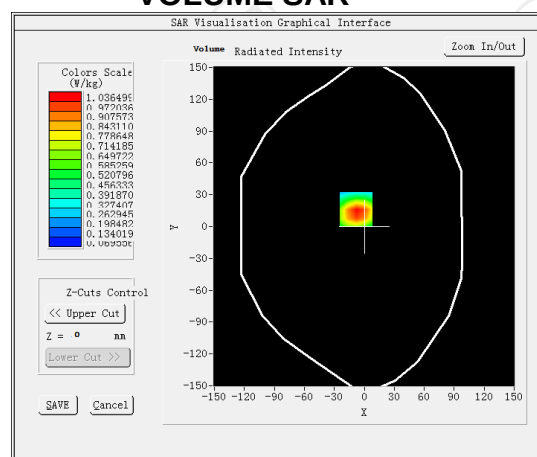


Maximum location: X=-8.00, Y=16.00 SAR Peak: 1.79 W/kg


SAR 10g (W/Kg)	0.926205
SAR 1g (W/Kg)	0.172597

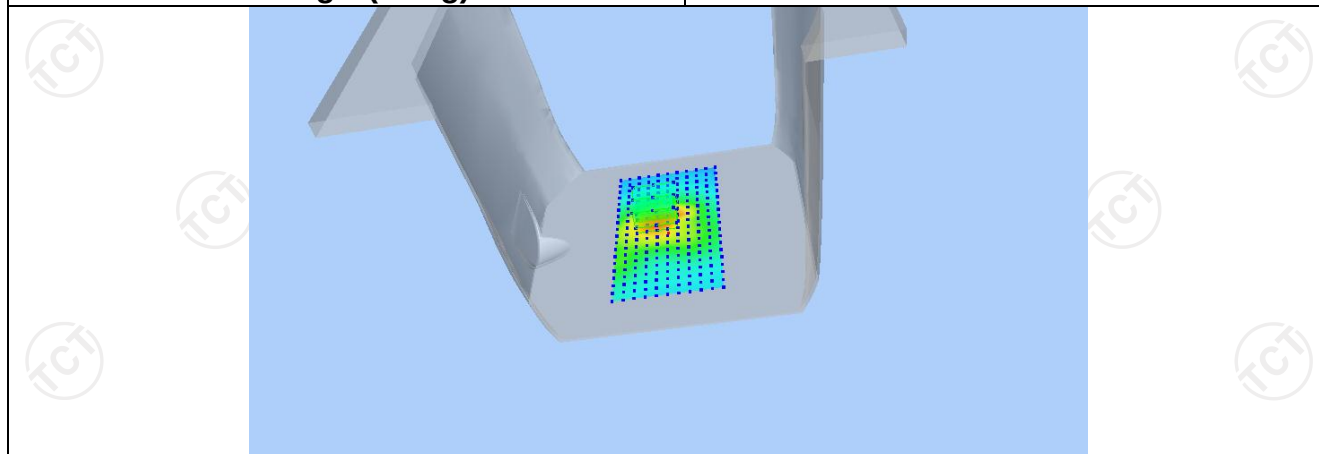

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.7522	1.0365	0.5204	0.2712	0.1620

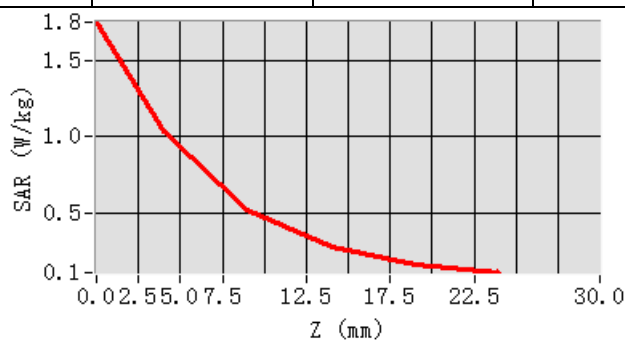

Hot spot position

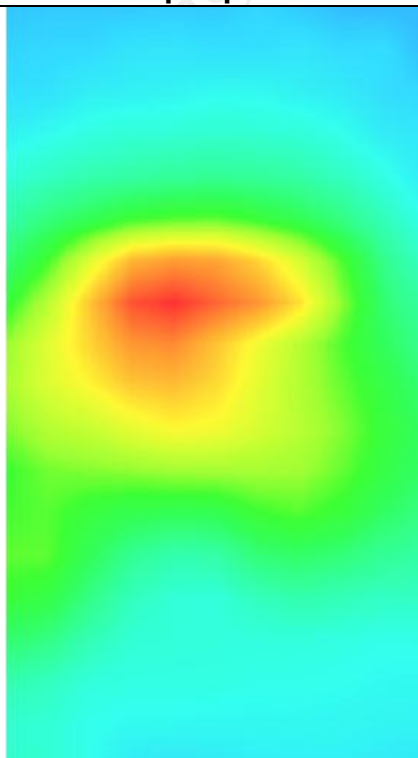


MEASUREMENT 2

Middle Band SAR (Channel 1450):


Date: 03/18/2022

Frequency (MHz)	1740.000000
Relative permittivity (real part)	53.342521
Relative permittivity (imaginary part)	14.225400
Conductivity (S/m)	1.492530
Variation (%)	-0.080000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>BAND4 WCDMA1700</u>

SURFACE SAR

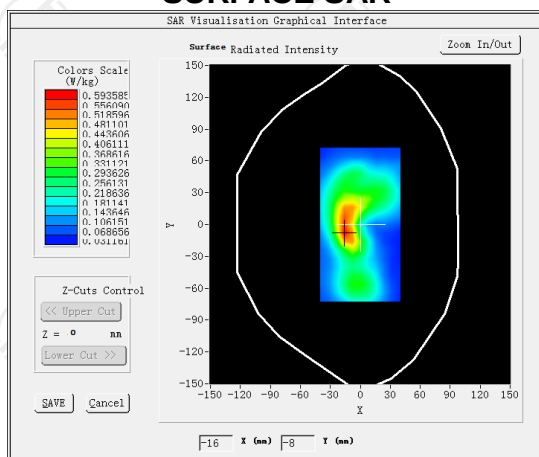


VOLUME SAR

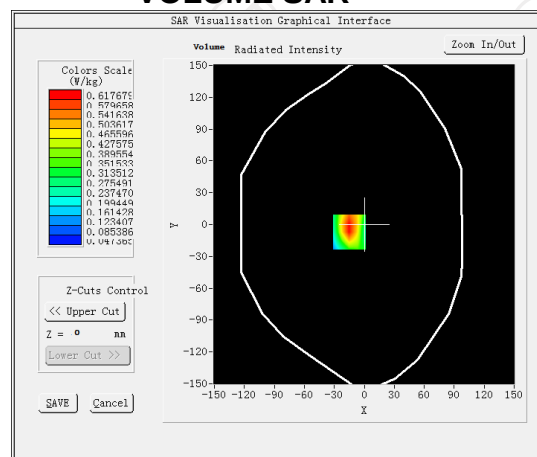


Maximum location: X=-15.00, Y=-7.00 SAR Peak: 1.01 W/kg


SAR 10g (W/Kg)	0.597183
SAR 1g (W/Kg)	0.427336

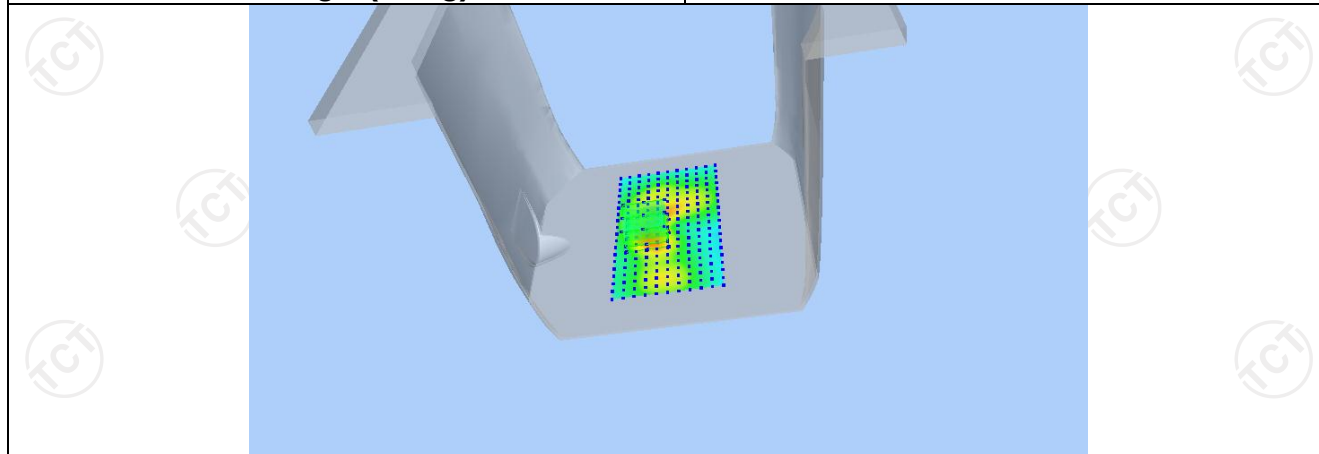

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5385	0.6177	0.2788	0.2071	0.1088

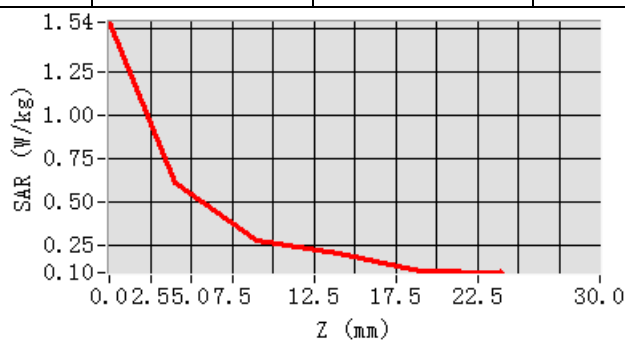

Hot spot position

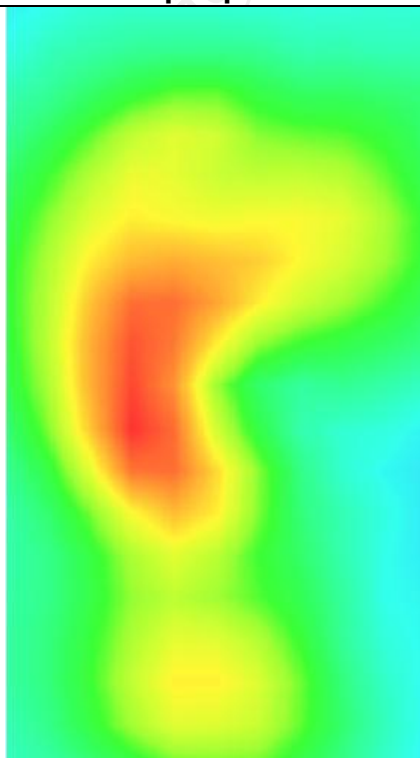


MEASUREMENT 3

Middle Band SAR (Channel 1450):


Date: 03/18/2022

Frequency (MHz)	1740.000000
Relative permittivity (real part)	53.342521
Relative permittivity (imaginary part)	14.225400
Conductivity (S/m)	1.492530
Variation (%)	-0.590000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back (10mm)
Band	BAND4 WCDMA1700(hotspot)

SURFACE SAR

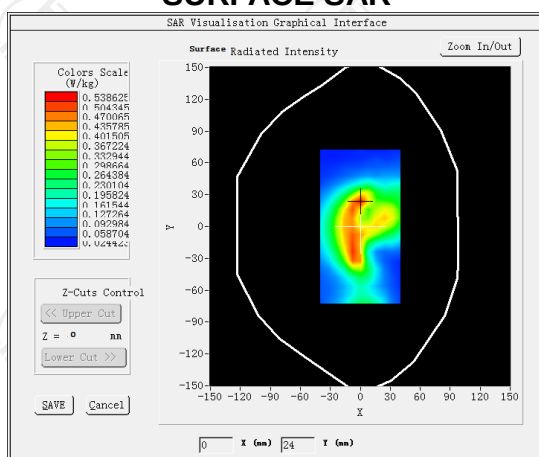


VOLUME SAR

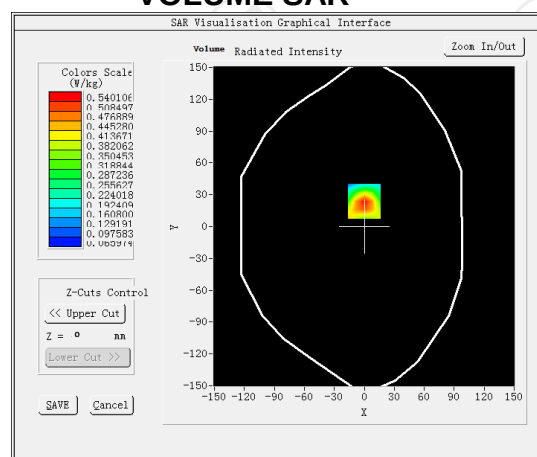


Maximum location: X=0.00, Y=24.00 SAR Peak: 0.83 W/kg


SAR 10g (W/Kg)	0.505276
SAR 1g (W/Kg)	0.451904

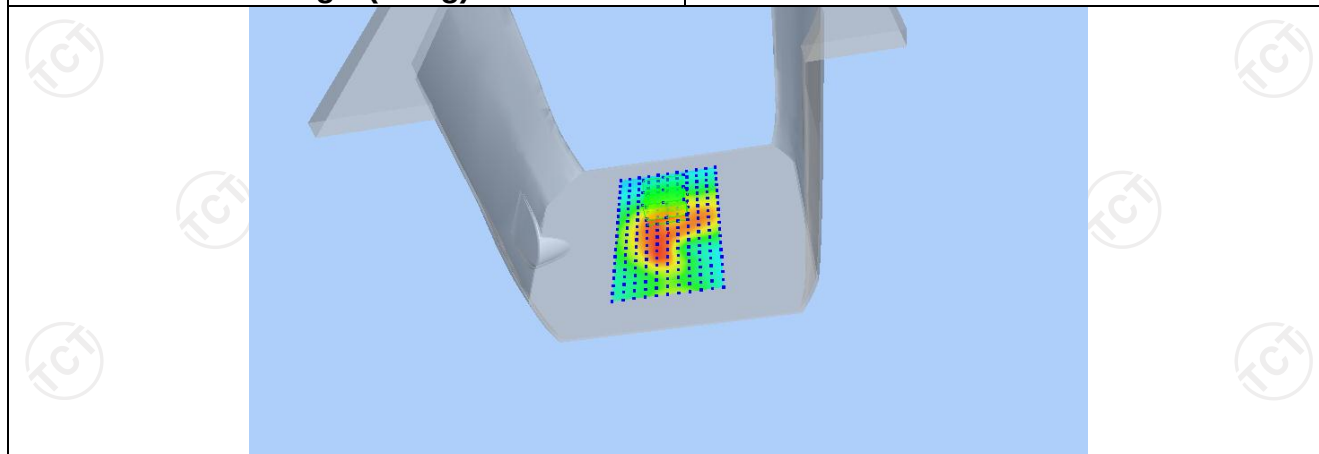

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8214	0.5401	0.3210	0.2031	0.1442

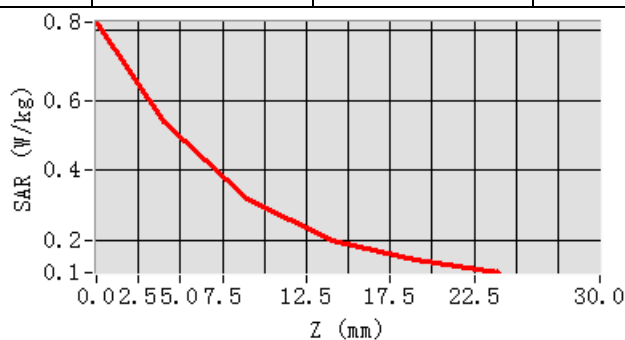


Hot spot position

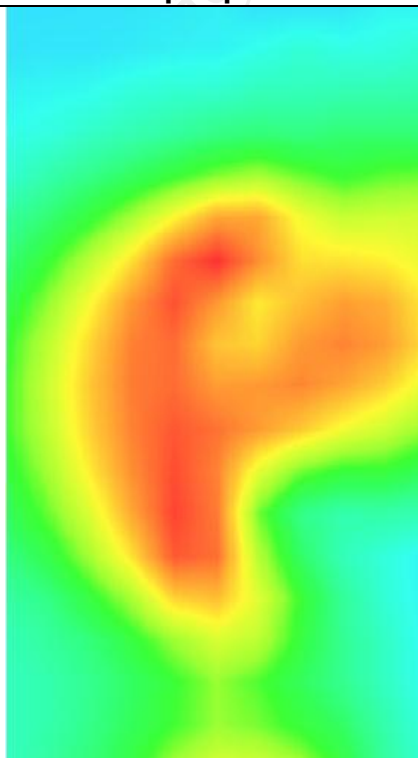


WCDMA Band V MEASUREMENT 1

Lower Band SAR (Channel 4132):		Date: 03/14/2022
Frequency (MHz)	826.400000	
Relative permittivity (real part)	55.262927	
Relative permittivity (imaginary part)	21.378266	
Conductivity (S/m)	0.931230	
Variation (%)	-0.310000	
Crest Factor:	1.0	
Probe Conversion factor	1.86	
E-Field Probe:	SSE2 (SN 36/20 EPG0346)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Validation plane	
Device Position	Body front(10mm)	
Band	BAND5 WCDMA850	

SURFACE SAR

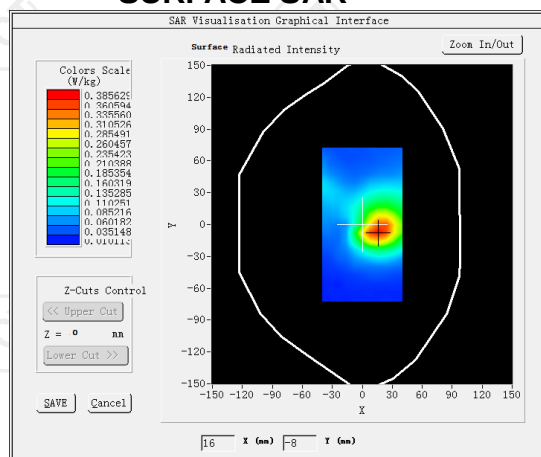


VOLUME SAR

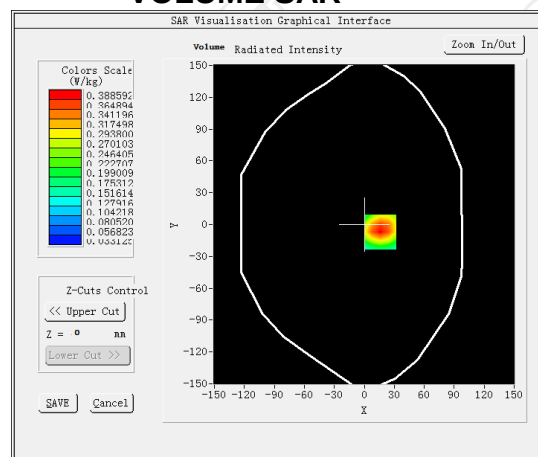


Maximum location: X=16.00, Y=-7.00 SAR Peak: 0.59 W/kg


SAR 10g (W/Kg)	0.225864
SAR 1g (W/Kg)	0.171290

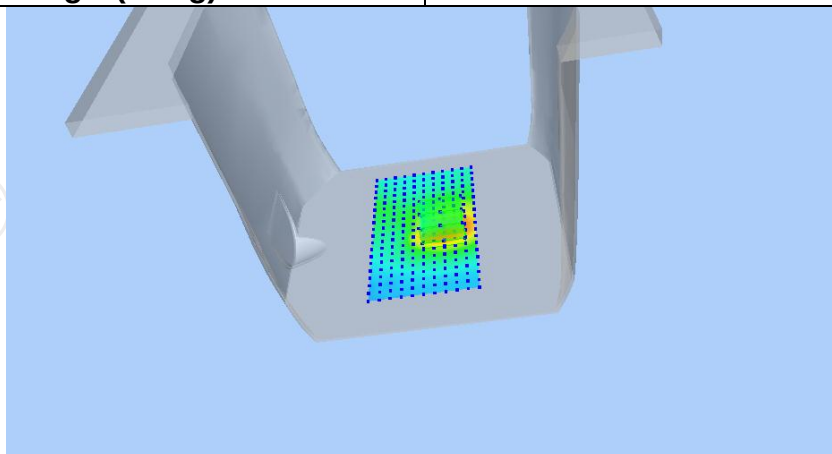

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5848	0.3886	0.2319	0.1437	0.0963

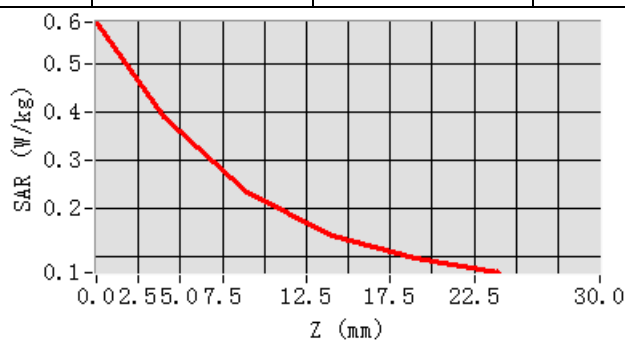

Hot spot position

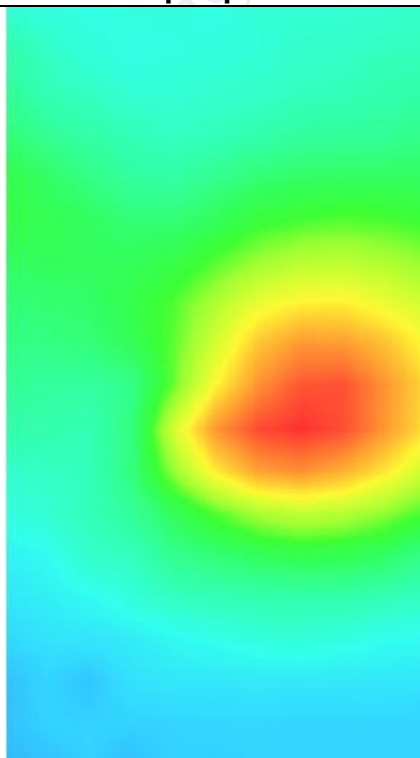


MEASUREMENT 2

Lower Band SAR (Channel 4132):


Date: 03/14/2022

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.262927
Relative permittivity (imaginary part)	21.378266
Conductivity (S/m)	0.931230
Variation (%)	-1.150000
Crest Factor:	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(10mm)
Band	BAND5 WCDMA850

SURFACE SAR

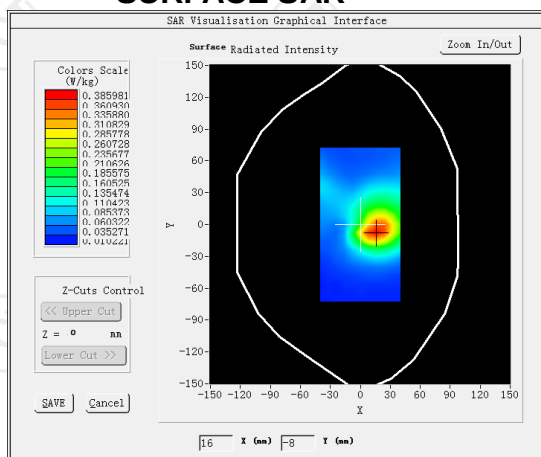


VOLUME SAR

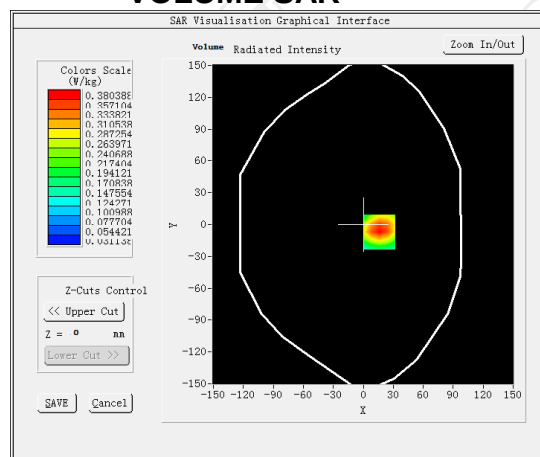


Maximum location: X=16.00, Y=-7.00 SAR Peak: 0.58 W/kg


SAR 10g (W/Kg)	0.321624
SAR 1g (W/Kg)	0.263625

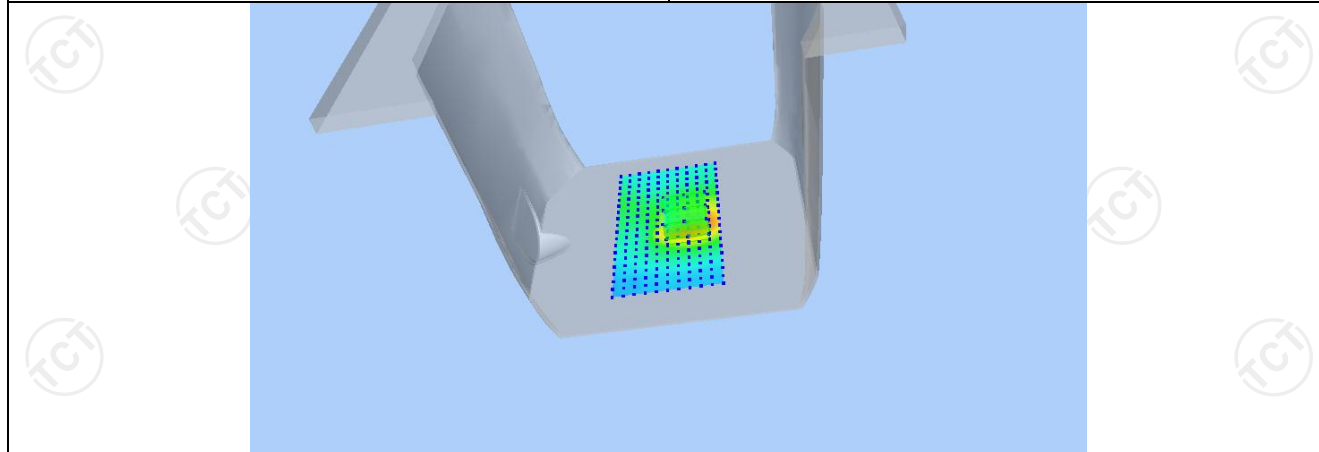

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5699	0.3804	0.2283	0.1419	0.0950

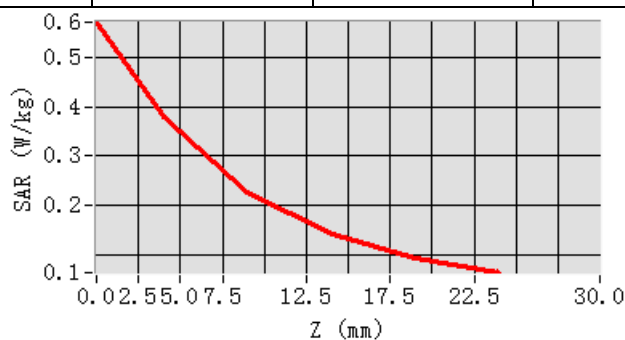

Hot spot position

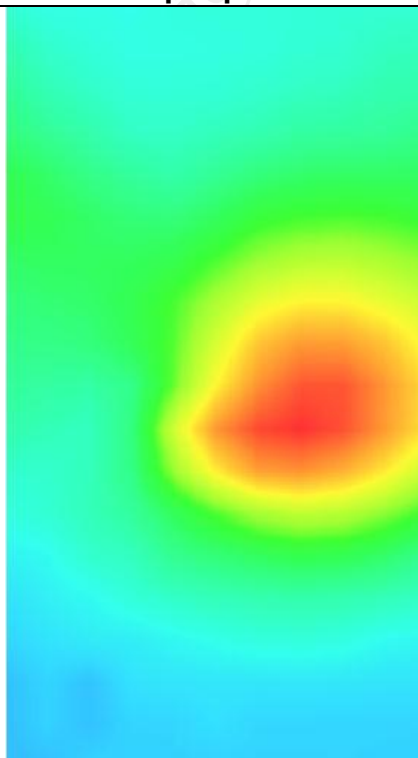


MEASUREMENT 4

Lower Band SAR (Channel 4132):


Date: 03/14/2022

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.262927
Relative permittivity (imaginary part)	21.378266
Conductivity (S/m)	0.931230
Variation (%)	0.600000
Crest Factor:	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>BAND5 WCDMA850(hotspot)</u>

SURFACE SAR

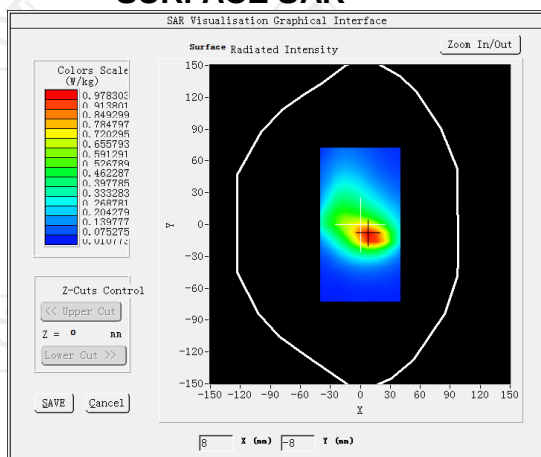


VOLUME SAR

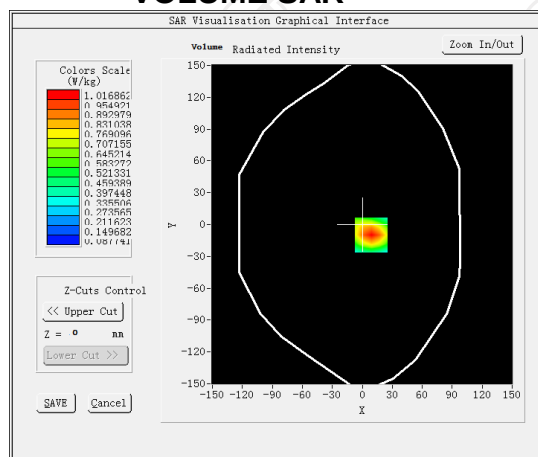


Maximum location: X=9.00, Y=-10.00 SAR Peak: 1.54 W/kg


SAR 10g (W/Kg)	0.552040
SAR 1g (W/Kg)	0.291845

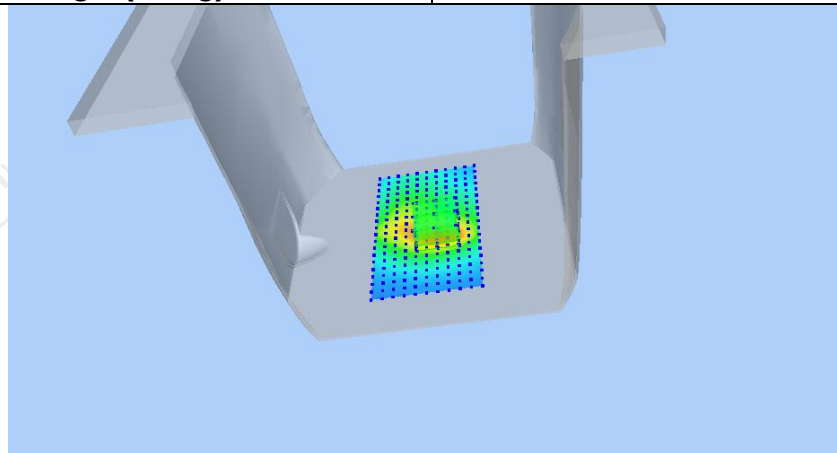

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5364	1.0169	0.6023	0.3688	0.2429

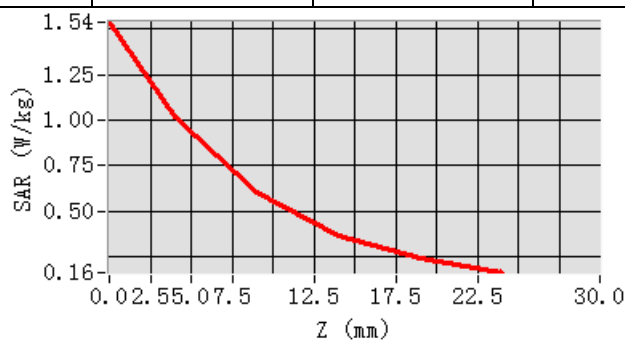

Hot spot position

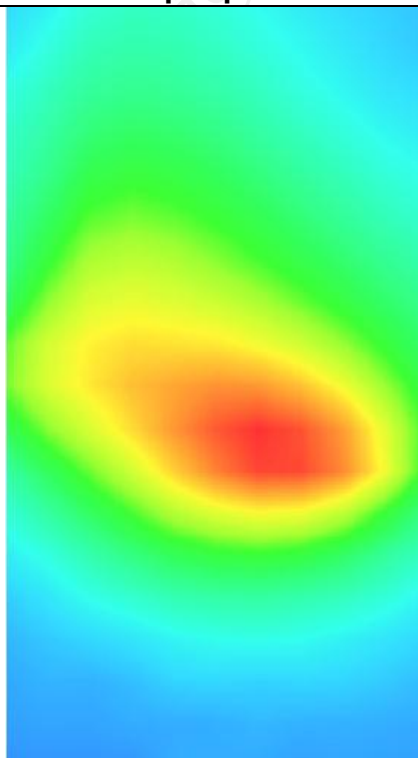

LTE Band 2


MEASUREMENT 1

Middle Band SAR (Channel 18900):


Date: 03/18/2022

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.232400
Conductivity (S/m)	1.531736
Variation (%)	0.200000
Crest Factor	1.0
Probe Conversion factor	2.32
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body front(10mm)
Band	LTE band 2 (1 RB#0)

SURFACE SAR

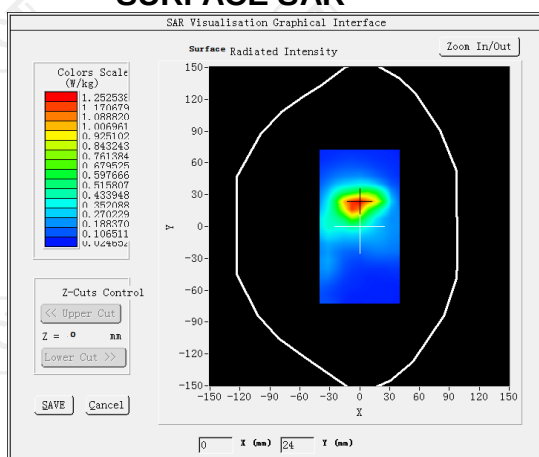


VOLUME SAR

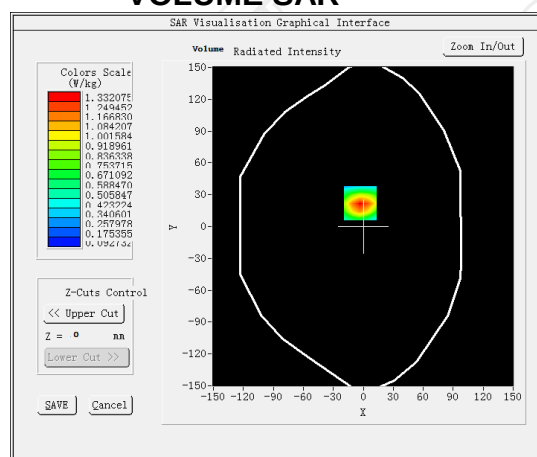


Maximum location: X=-3.00, Y=22.00 SAR Peak: 2.22 W/kg


SAR 10g (W/Kg)	1.654477
SAR 1g (W/Kg)	0.350523

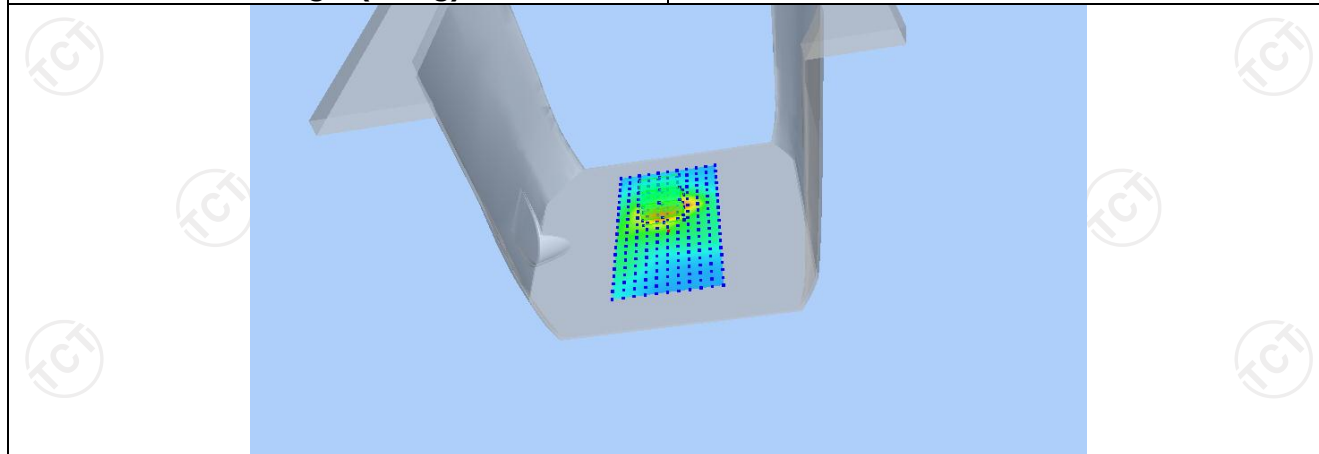

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.2020	1.3321	0.6952	0.3808	0.2394

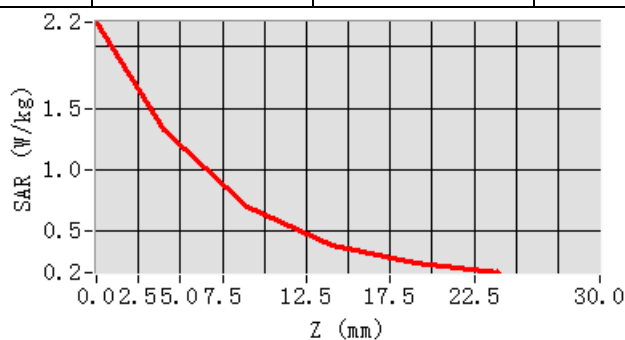

Hot spot position

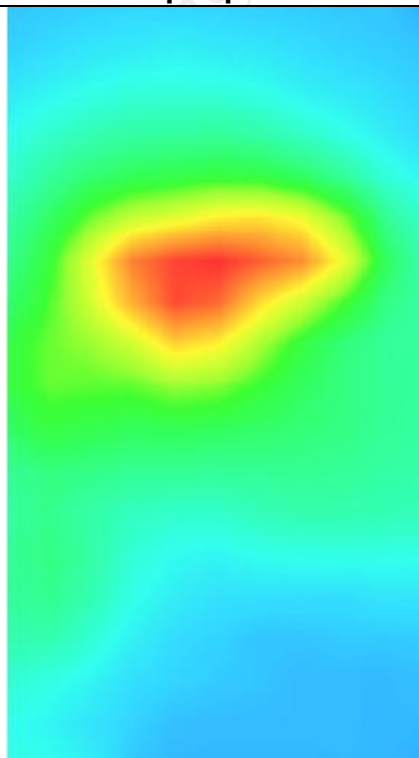


MEASUREMENT 2

Middle Band SAR (Channel 18900):


Date: 03/18/2022

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.232400
Conductivity (S/m)	1.531736
Variation (%)	0.320000
Crest Factor	1.0
Probe Conversion factor	2.32
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 2 (1 RB#0)</u>

SURFACE SAR

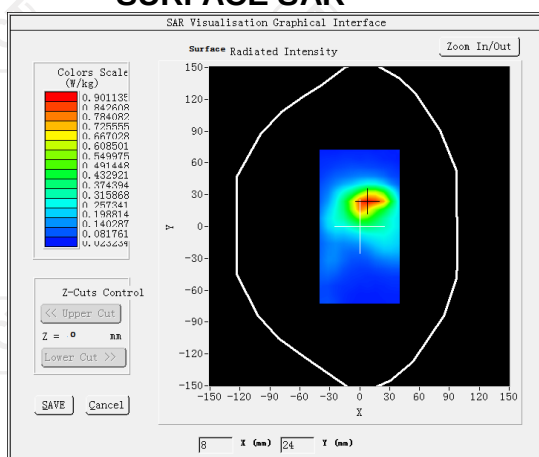


VOLUME SAR

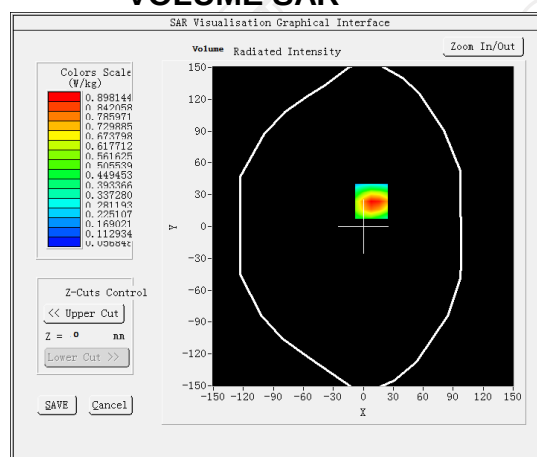


Maximum location: X=8.00, Y=24.00 SAR Peak: 1.47 W/kg


SAR 10g (W/Kg)	0.864643
SAR 1g (W/Kg)	0.655096

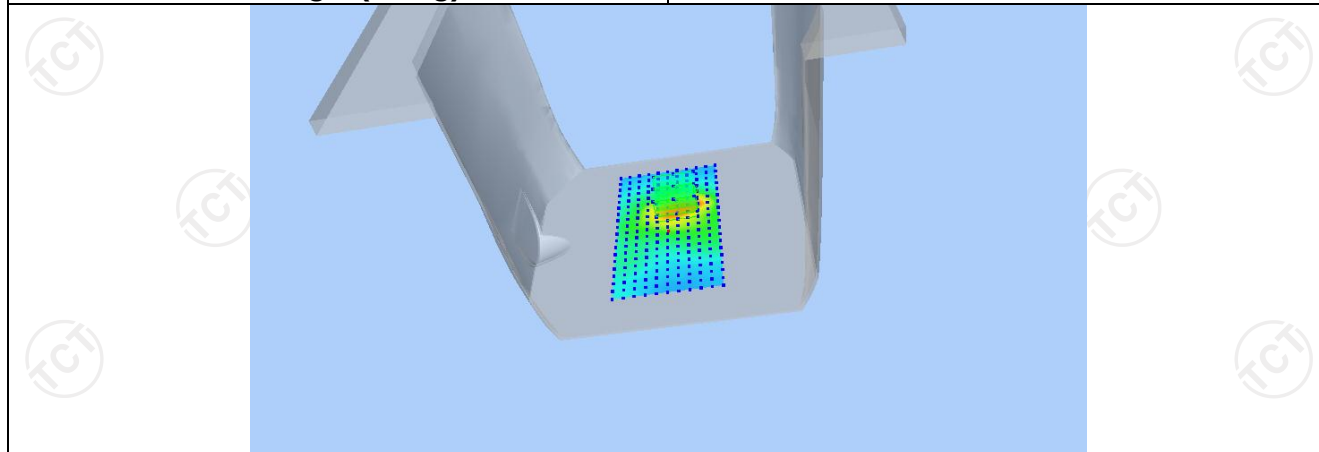

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4219	0.8981	0.4967	0.2834	0.1766

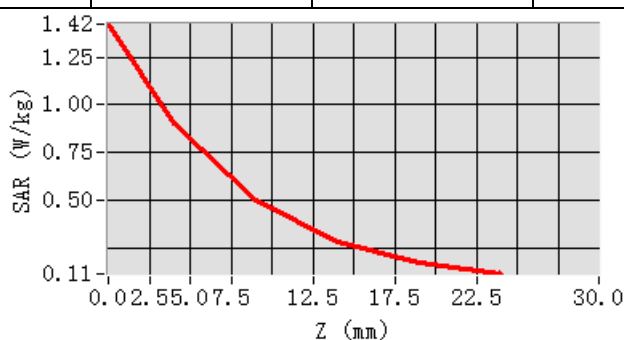

Hot spot position

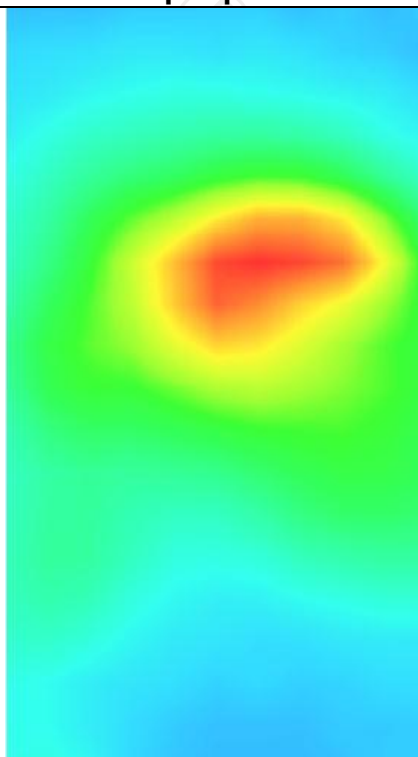


MEASUREMENT 3

Middle Band SAR (Channel 18900):


Date: 03/18/2022

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.232400
Conductivity (S/m)	1.531736
Variation (%)	-1.170000
Crest Factor	1.0
Probe Conversion factor	2.32
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 2 (1 RB#0)</u>

SURFACE SAR

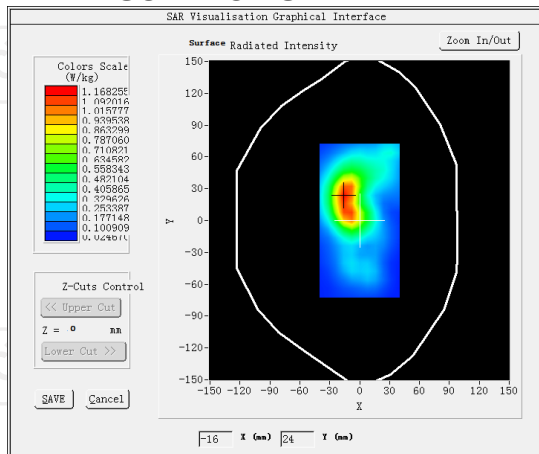


VOLUME SAR

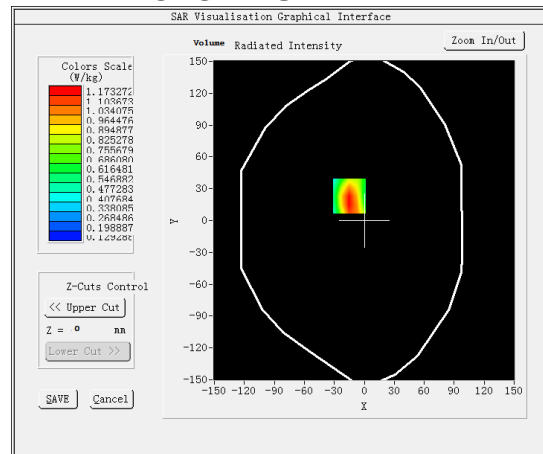


Maximum location: X=-15.00, Y=23.00 SAR Peak: 1.80 W/kg


SAR 10g (W/Kg)	0.951296
SAR 1g (W/Kg)	0.682924

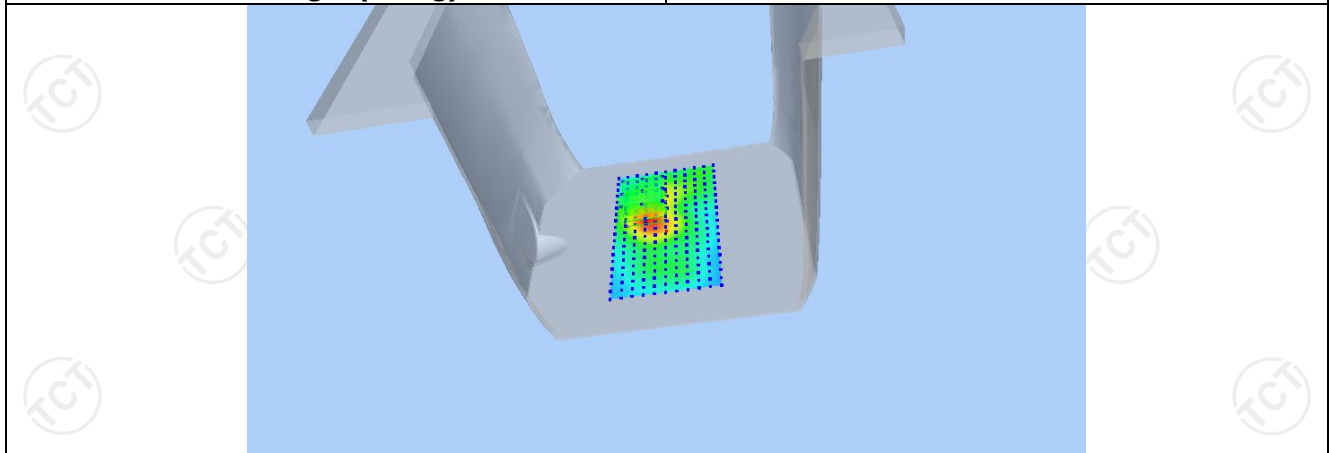

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.0809	1.1733	0.6436	0.4183	0.2774

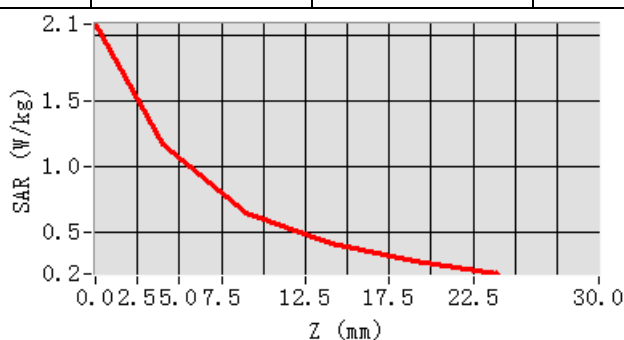

Hot spot position

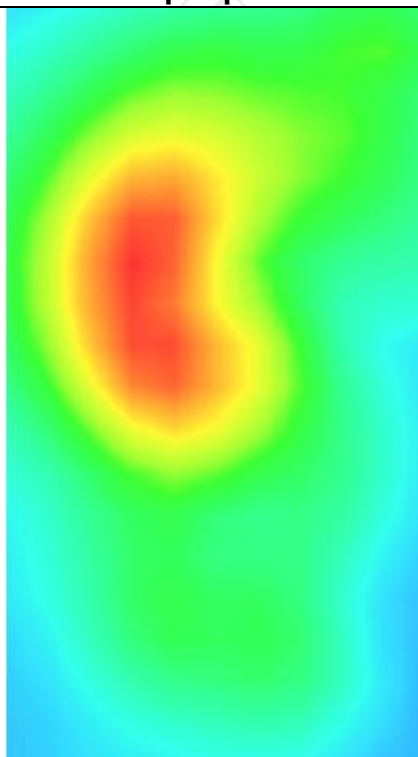

LTE Band 4


MEASUREMENT 1

Lower Band SAR (Channel 20050):


Date: 03/16/2022

Frequency (MHz)	1720.000000
Relative permittivity (real part)	53.321249
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.502592
Variation (%)	-0.390000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body front(10mm)</u>
Band	<u>LTE band 4(1 RB#49)</u>

SURFACE SAR

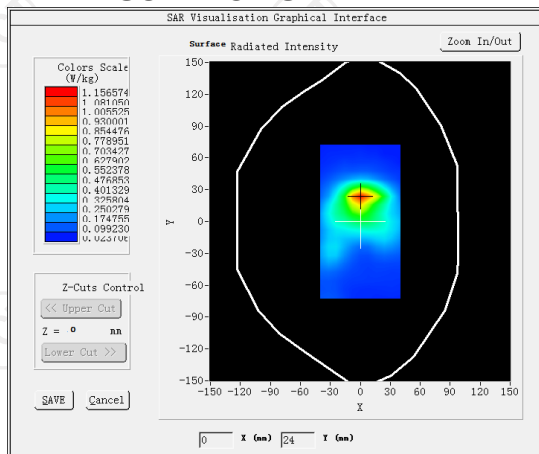


VOLUME SAR

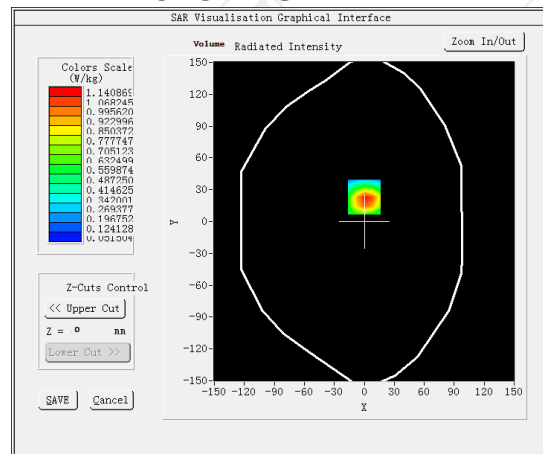


Maximum location: X=0.00, Y=23.00 SAR Peak: 2.05 W/kg


SAR 10g (W/Kg)	0.550812
SAR 1g (W/Kg)	0.440057

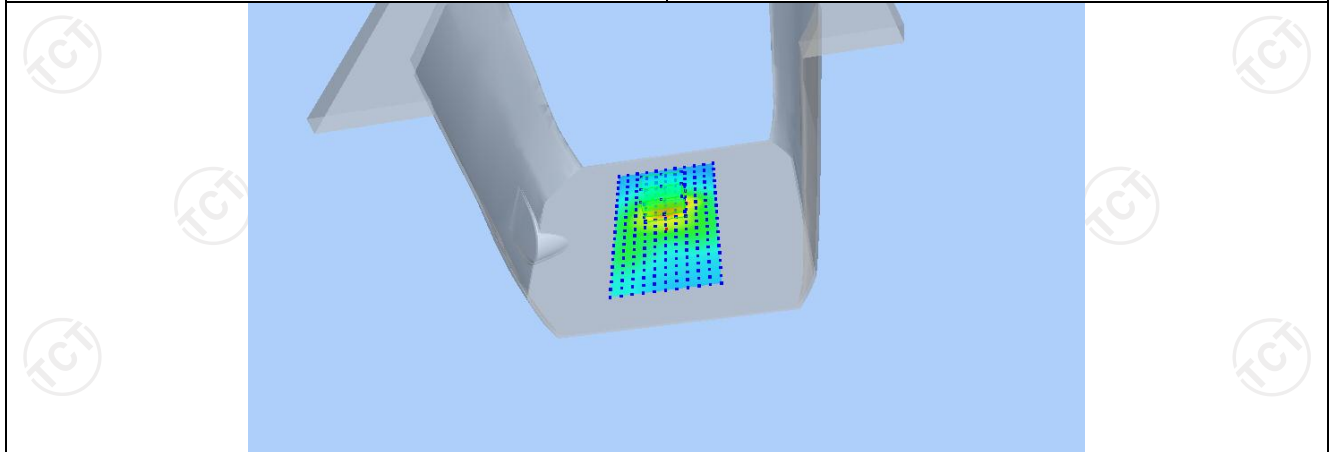

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.9959	1.1409	0.5442	0.2713	0.1612

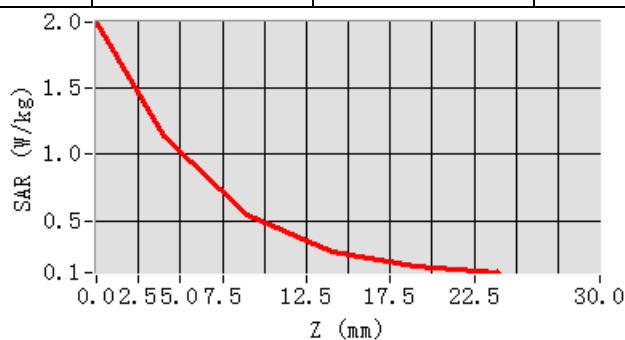

Hot spot position

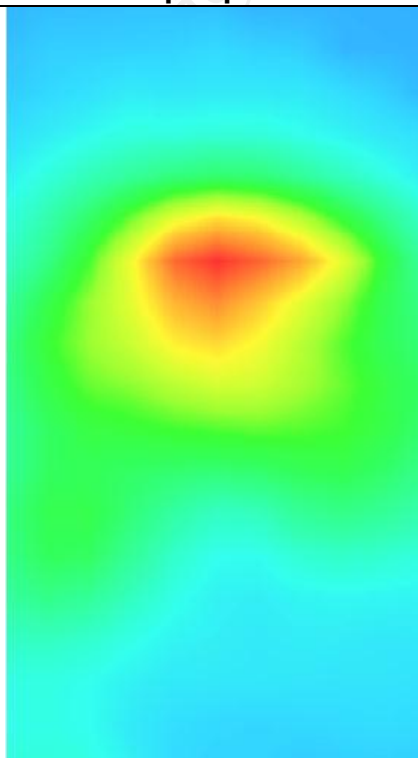


MEASUREMENT 2

Lower Band SAR (Channel 20050):


Date: 03/16/2022

Frequency (MHz)	1720.000000
Relative permittivity (real part)	53.321249
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.502592
Variation (%)	-0.350000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 4(1 RB#49)</u>

SURFACE SAR

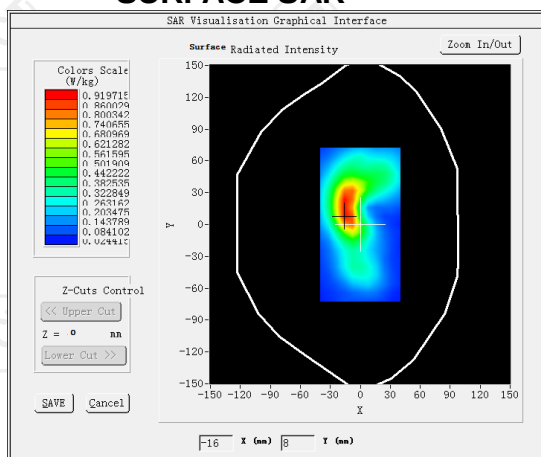


VOLUME SAR

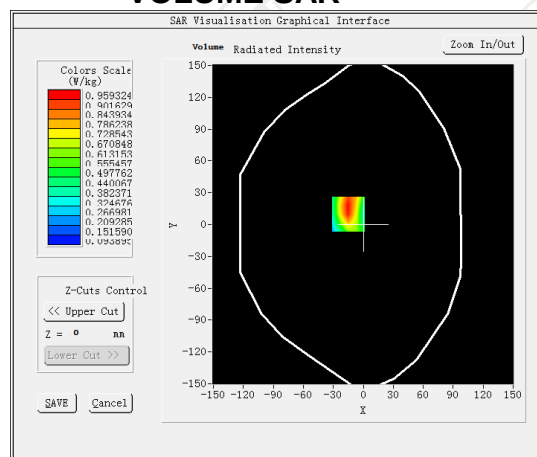


Maximum location: X=-15.00, Y=10.00 SAR Peak: 1.46 W/kg


SAR 10g (W/Kg)	0.922113
SAR 1g (W/Kg)	0.700539

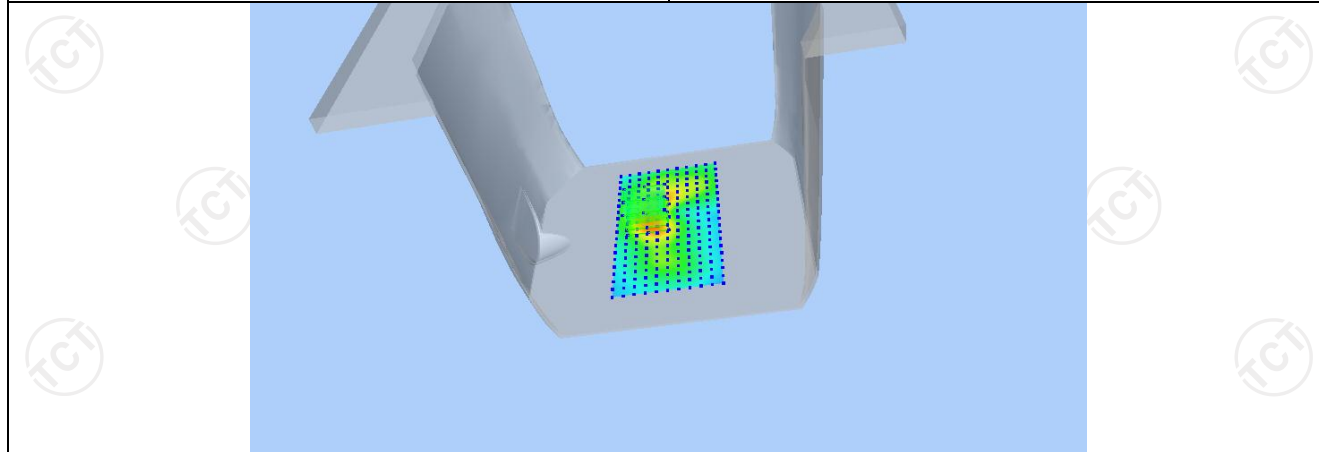

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.1227	0.9593	0.4855	0.3521	0.2042

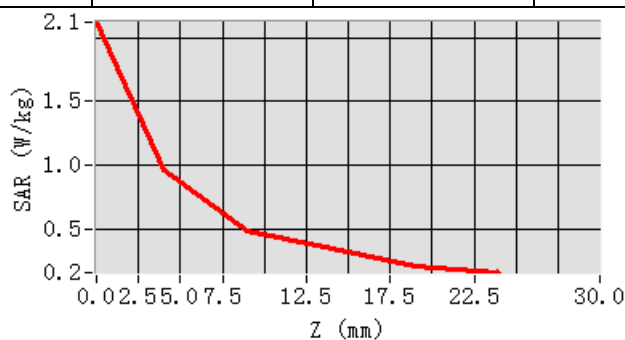

Hot spot position

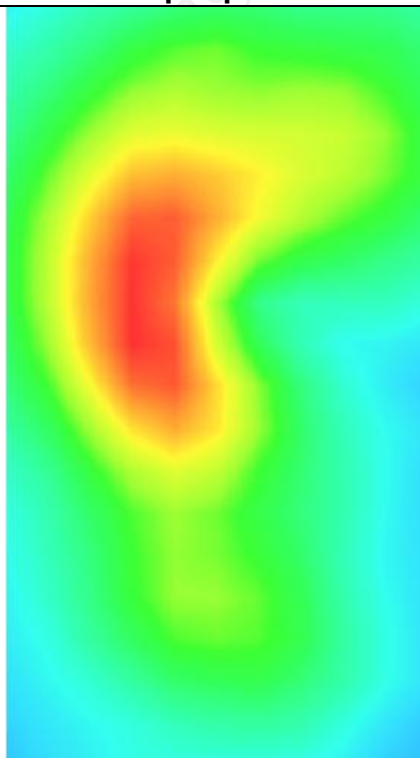


MEASUREMENT 3

Lower Band SAR (Channel 20050):


Date: 03/16/2022

Frequency (MHz)	1720.000000
Relative permittivity (real part)	53.321249
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.502592
Variation (%)	-0.130000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 4(1 RB#49)</u>

SURFACE SAR

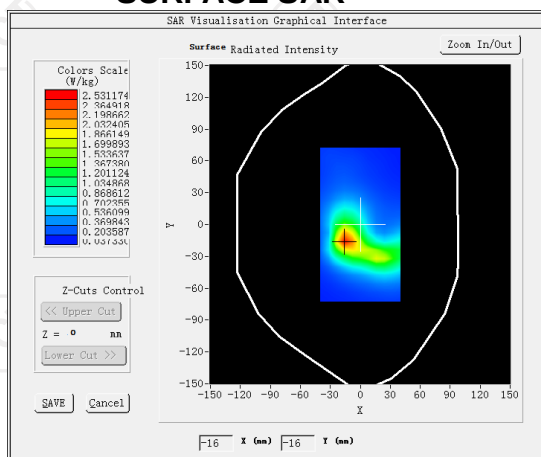


VOLUME SAR

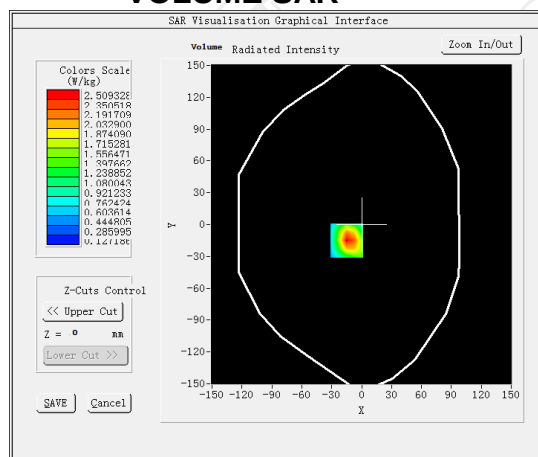


Maximum location: X=-15.00, Y=-15.00 SAR Peak: 4.02 W/kg


SAR 10g (W/Kg)	1.260691
SAR 1g (W/Kg)	0.715670

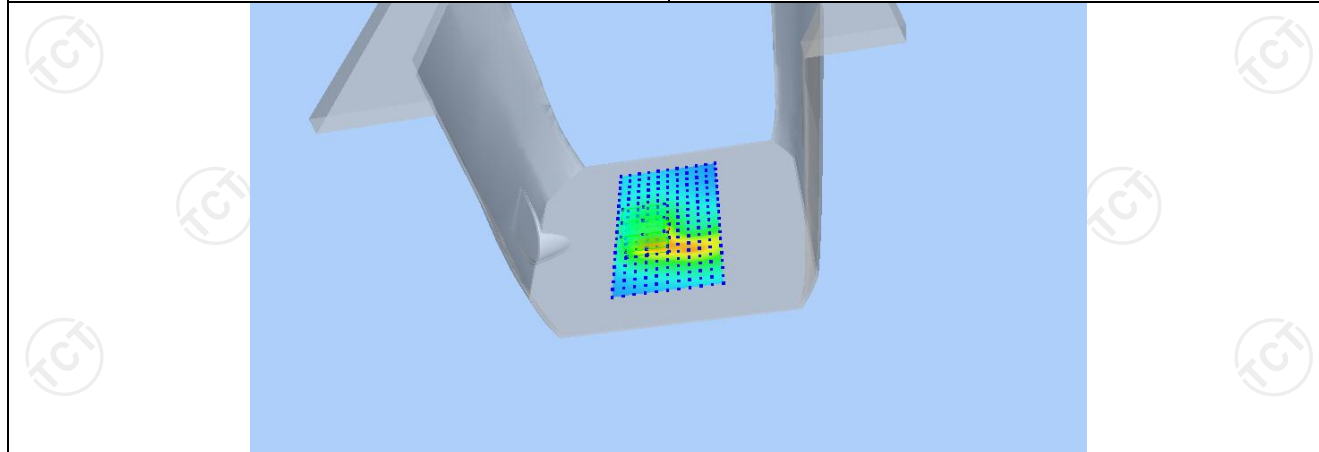

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.9497	2.5093	1.3992	0.8041	0.5030

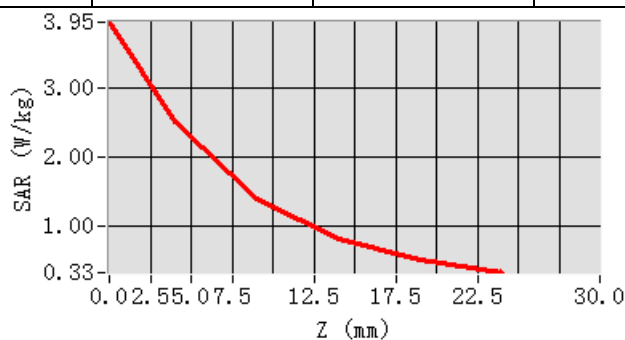

Hot spot position

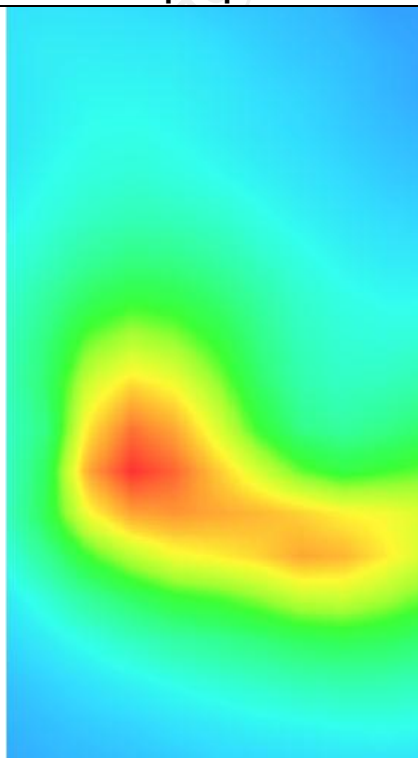

LTE Band 5


MEASUREMENT 1

Middle Band SAR (Channel 20525):


Date: 03/14/2022

Frequency (MHz)	836.500000
Relative permittivity (real part)	55.260832
Relative permittivity (imaginary part)	12.468860
Conductivity (S/m)	0.934272
Variation (%)	0.390000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body front(10mm)
Band	LTE band 5(1 RB#0)

SURFACE SAR

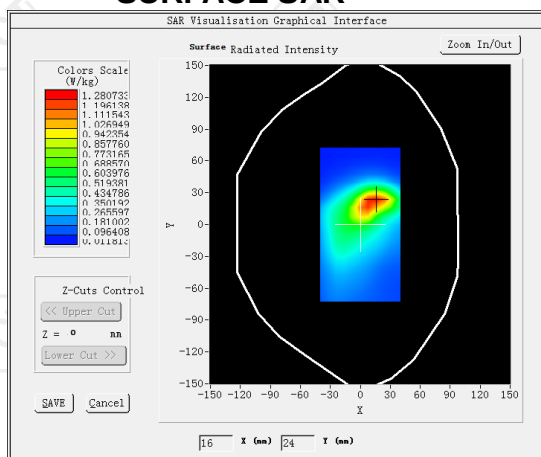


VOLUME SAR

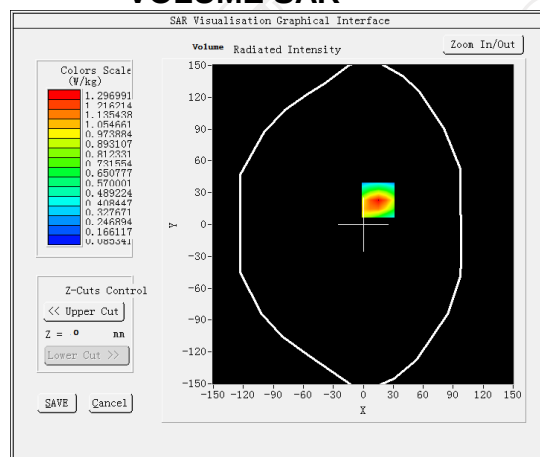


Maximum location: X=15.00, Y=23.00 SAR Peak: 2.05 W/kg


SAR 10g (W/Kg)	1.226383
SAR 1g (W/Kg)	0.333114

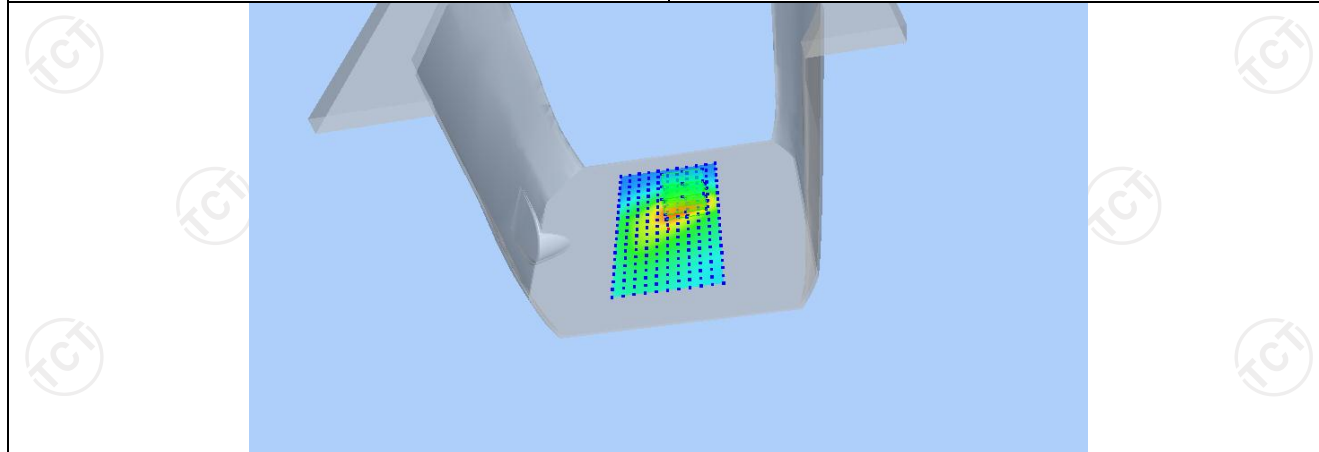

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.0327	1.2970	0.7310	0.4291	0.2778

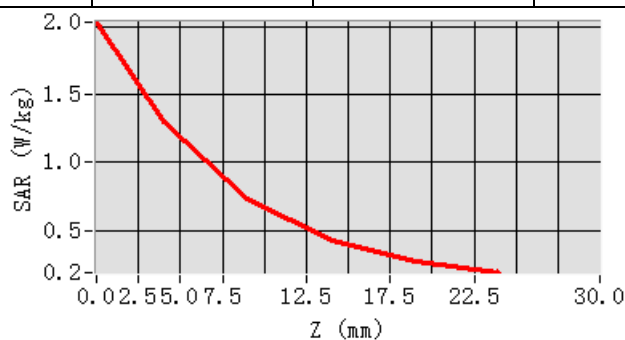

Hot spot position

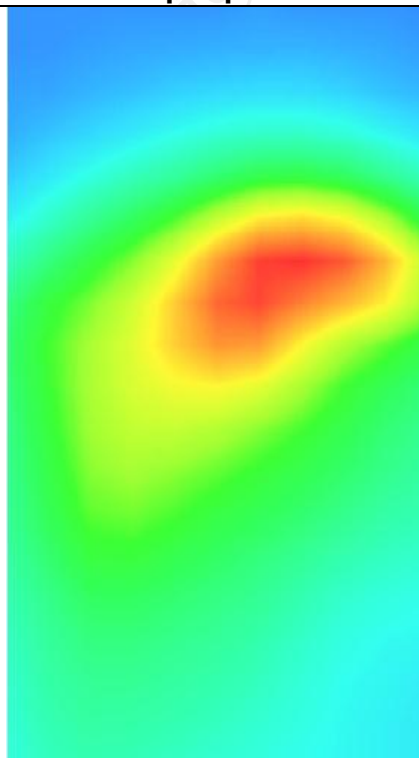


MEASUREMENT 2

Middle Band SAR (Channel 20525):


Date: 03/14/2022

Frequency (MHz)	836.500000
Relative permittivity (real part)	55.260832
Relative permittivity (imaginary part)	12.468860
Conductivity (S/m)	0.934272
Variation (%)	-0.400000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 5(1 RB#0)</u>

SURFACE SAR

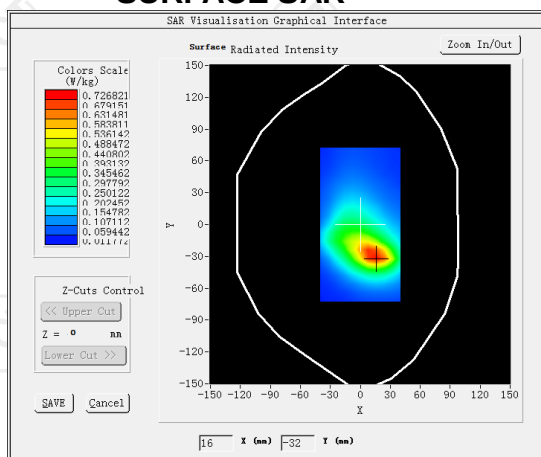


VOLUME SAR

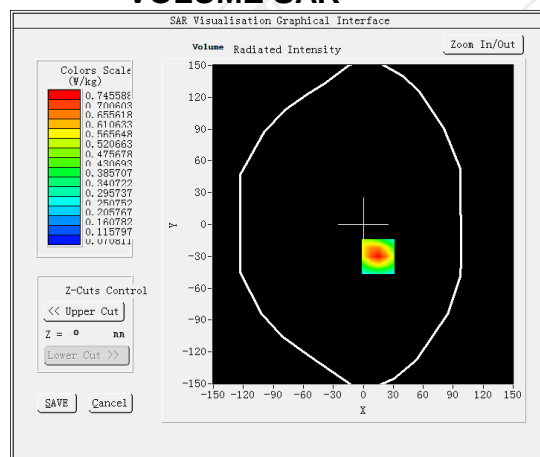


Maximum location: X=15.00, Y=-30.00 SAR Peak: 1.13 W/kg


SAR 10g (W/Kg)	0.701850
SAR 1g (W/Kg)	0.611518

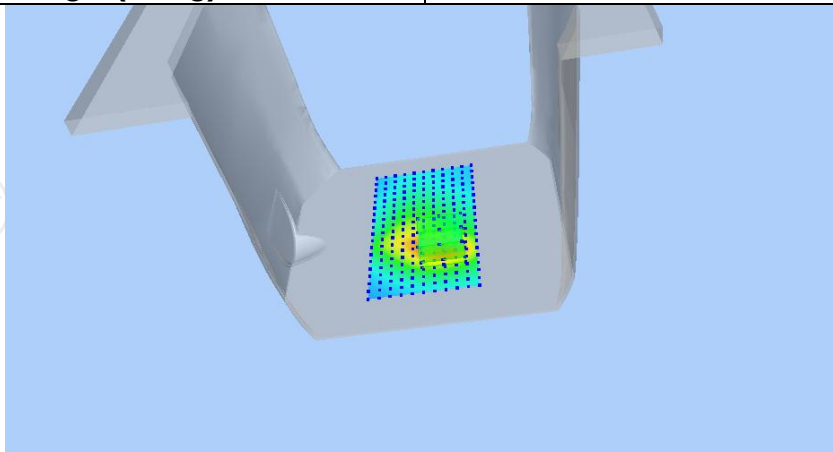

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1217	0.7456	0.4454	0.2766	0.1859

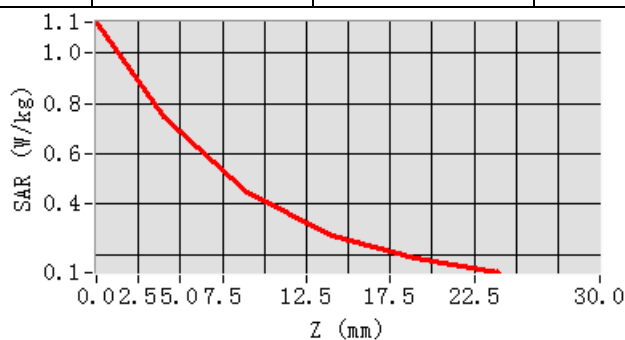

Hot spot position

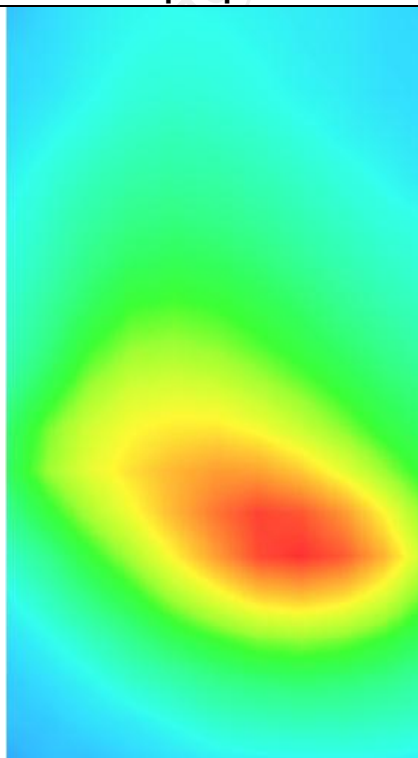


MEASUREMENT 3

Middle Band SAR (Channel 20525):


Date: 03/14/2022

Frequency (MHz)	836.500000
Relative permittivity (real part)	55.260832
Relative permittivity (imaginary part)	12.468860
Conductivity (S/m)	0.934272
Variation (%)	0.320000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back((hotspot 10mm)
Band	LTE band 5(1 RB#0)

SURFACE SAR

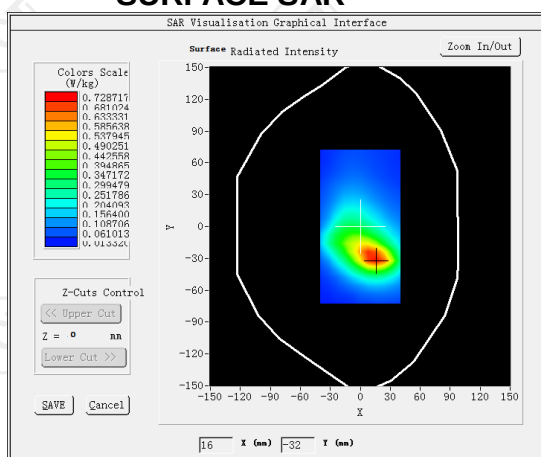


VOLUME SAR

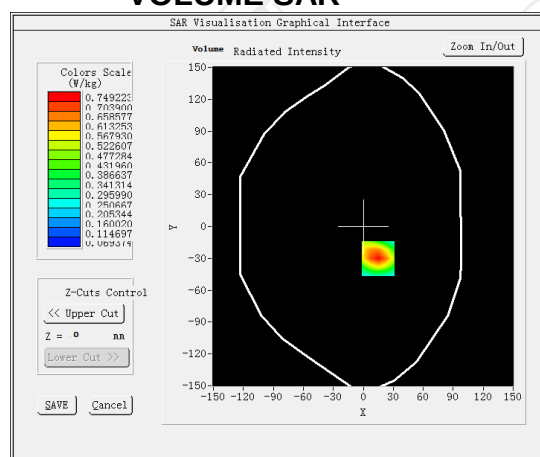


Maximum location: X=15.00, Y=-30.00 SAR Peak: 1.13 W/kg


SAR 10g (W/Kg)	0.714223
SAR 1g (W/Kg)	0.625037

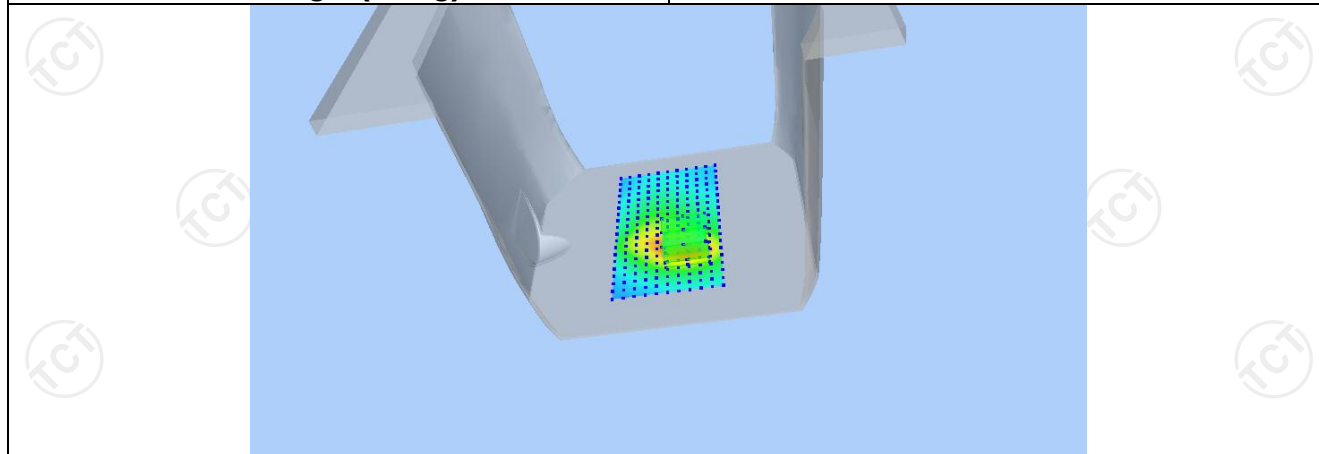

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1263	0.7492	0.4481	0.2785	0.1872

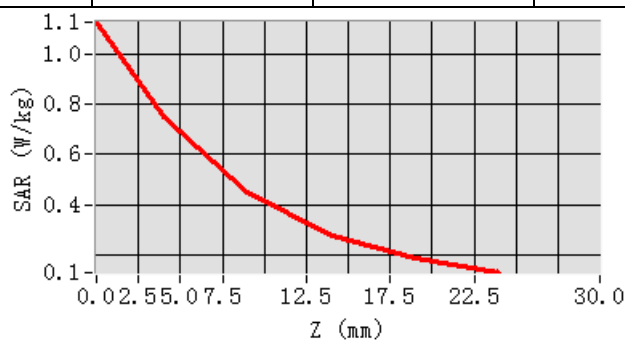

Hot spot position

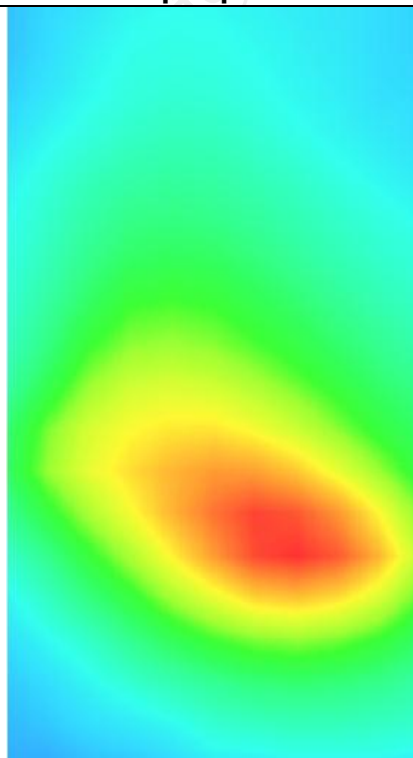

LTE Band 7


MEASUREMENT 1

Middle Band SAR (Channel 21100):


Date: 03/28/2022

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.892754
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.902731
Variation (%)	0.270000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body front(10mm)
Band	LTE band 7(1 RB#0)

SURFACE SAR

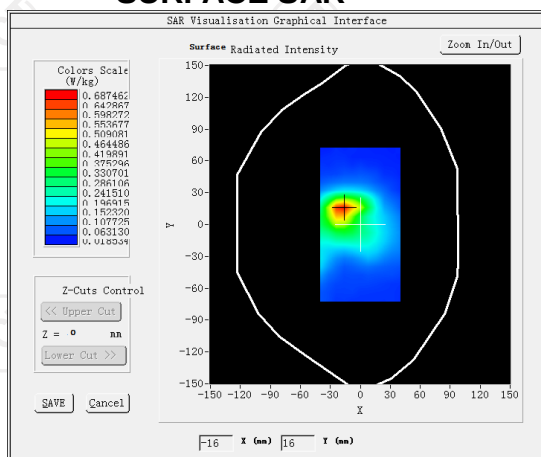


VOLUME SAR

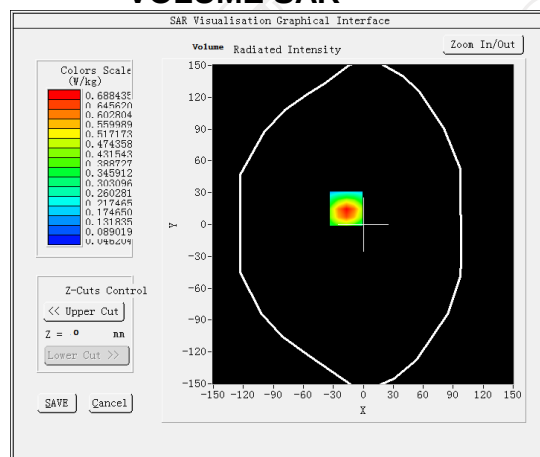


Maximum location: X=-17.00, Y=15.00 SAR Peak: 1.21 W/kg


SAR 10g (W/Kg)	0.342915
SAR 1g (W/Kg)	0.256332

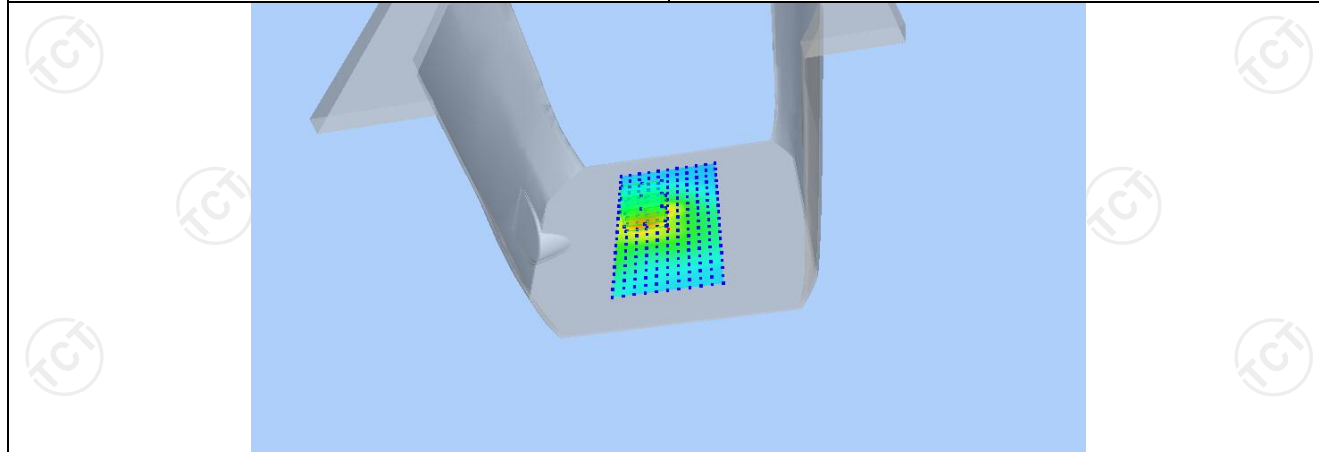

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1888	0.6884	0.3366	0.1741	0.1080

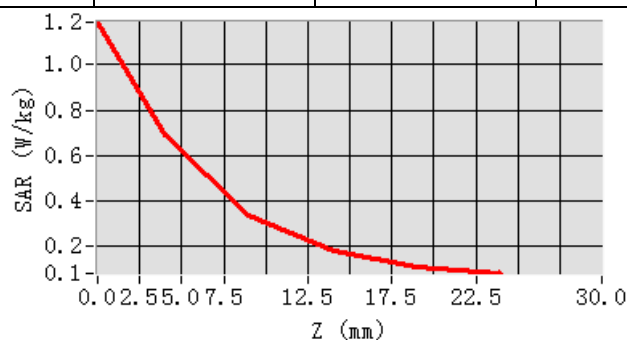

Hot spot position

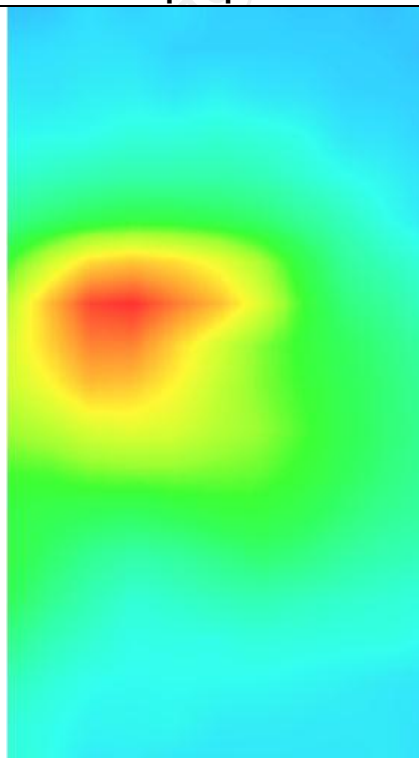


MEASUREMENT 2

Middle Band SAR (Channel 21100):


Date: 03/28/2022

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.892754
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.902731
Variation (%)	-0.500000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 7(1 RB#0)</u>

SURFACE SAR

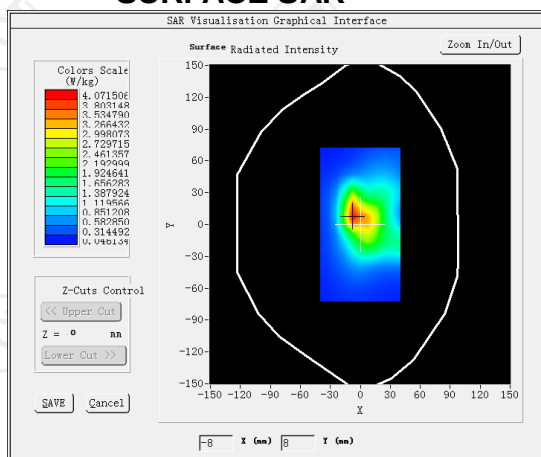


VOLUME SAR

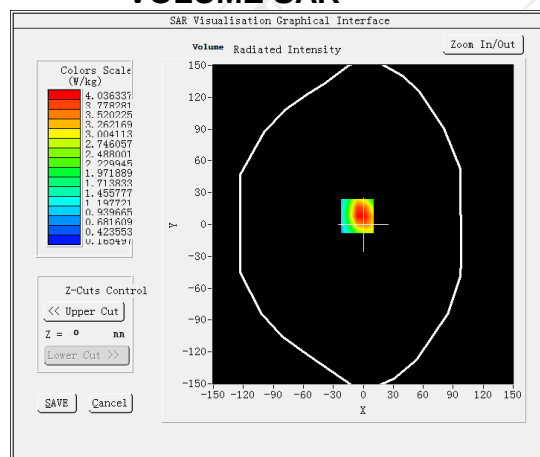


Maximum location: X=-6.00, Y=8.00 SAR Peak: 7.39 W/kg


SAR 10g (W/Kg)	0.976372
SAR 1g (W/Kg)	0.570271

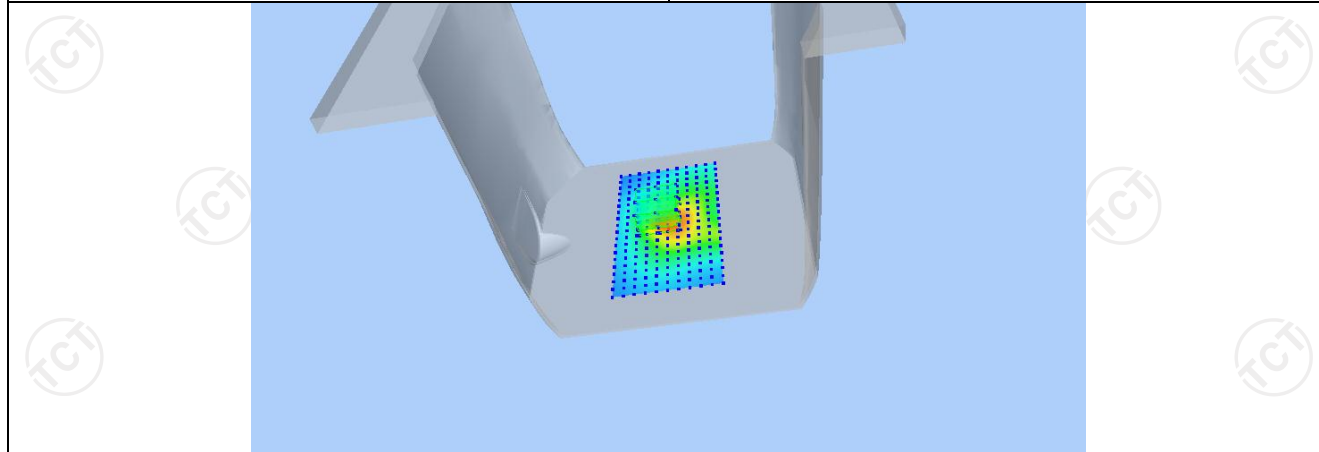

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	12.1463	4.0363	1.3465	1.0586	0.4174

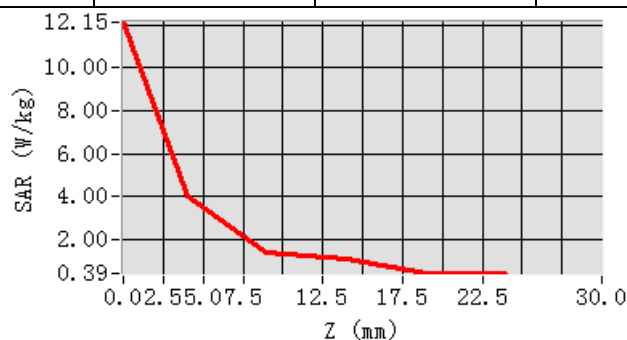

Hot spot position

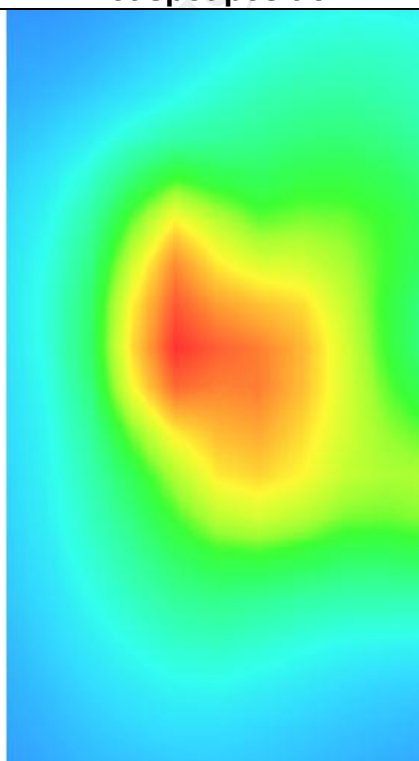


MEASUREMENT 3

Middle Band SAR (Channel 21100):


Date: 03/28/2022

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.892754
Relative permittivity (imaginary part)	12.468850
Conductivity (S/m)	1.902731
Variation (%)	-0.170000
Crest Factor	1.0
Probe Conversion factor	2.16
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 7(1 RB#0)</u>

SURFACE SAR

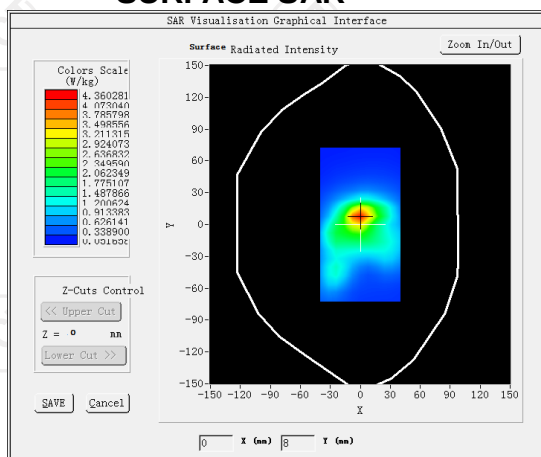


VOLUME SAR

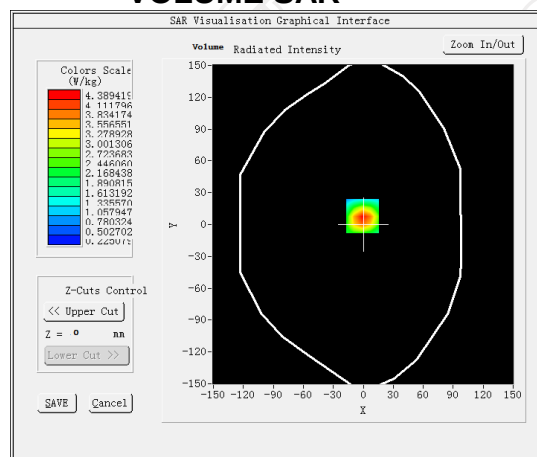


Maximum location: X=-1.00, Y=8.00 SAR Peak: 7.72 W/kg


SAR 10g (W/Kg)	0.986620
SAR 1g (W/Kg)	0.609683

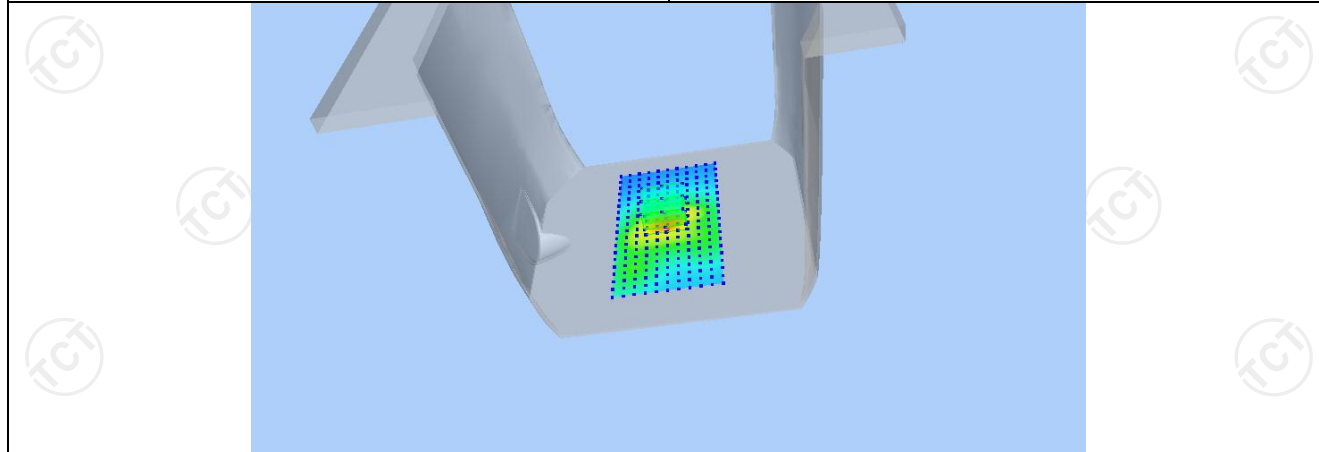

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	7.6230	4.3894	2.1097	1.0475	0.6046

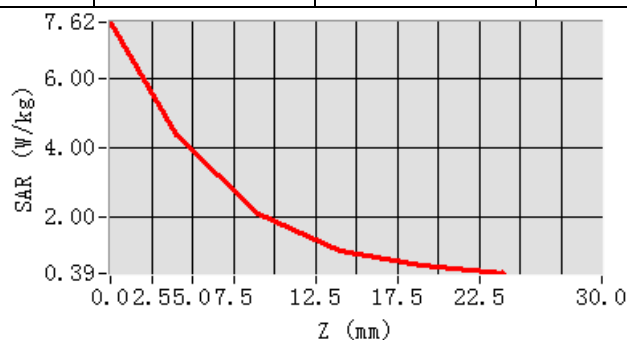

Hot spot position

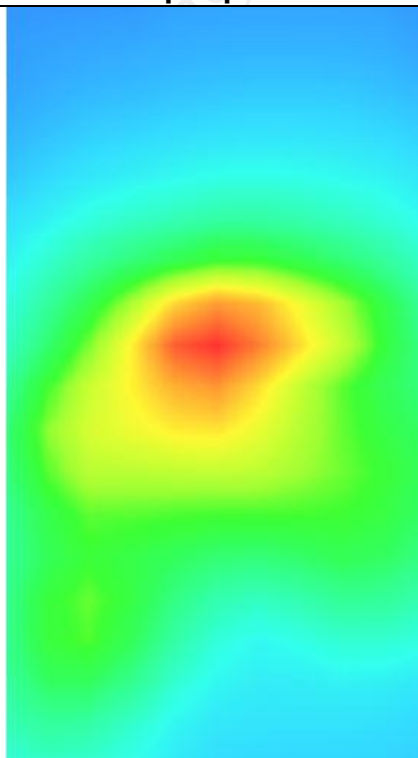


LTE Band 12


MEASUREMENT 1

Hight Band SAR (Channel 23130):		Date: 03/11/2022
Frequency (MHz)	711.000000	
Relative permittivity (real part)	55.260832	
Relative permittivity (imaginary part)	12.468860	
Conductivity (S/m)	0.934272	
Variation (%)	1.160000	
Crest Factor	1.0	
Probe Conversion factor	1.86	
E-Field Probe:	SSE2 (SN 36/20 EPG0346)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Validation plane	
Device Position	Body front(10mm)	
Band	LTE band 12(1 RB#0)	

SURFACE SAR

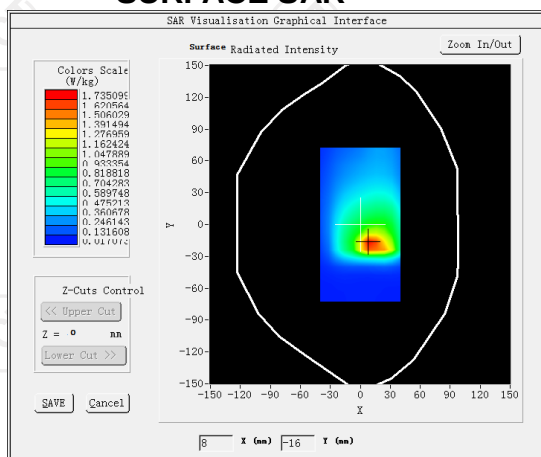

VOLUME SAR

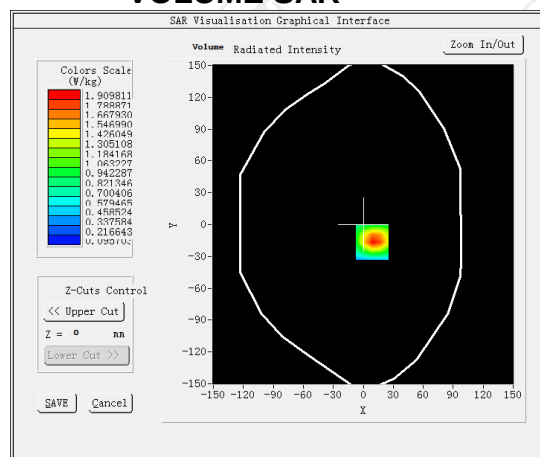


Maximum location: X=9.00, Y=-17.00 SAR Peak: 3.37 W/kg

SAR 10g (W/Kg)


0.964844

SAR 1g (W/Kg)


0.149848

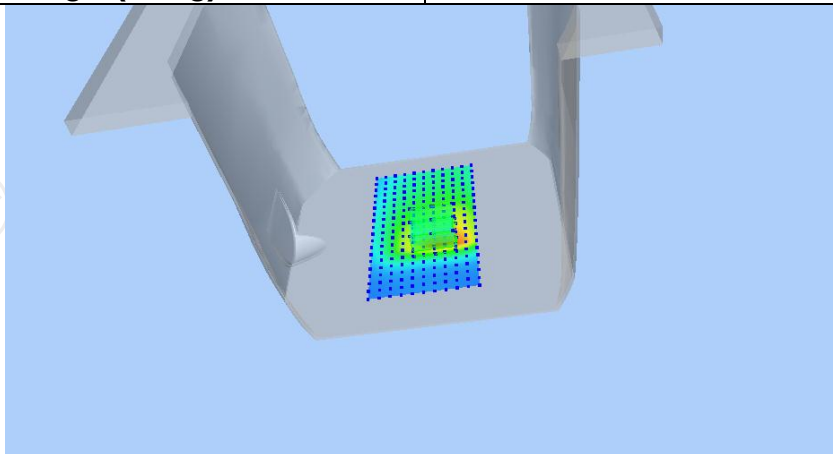

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.3066	1.9098	0.9313	0.4827	0.1026

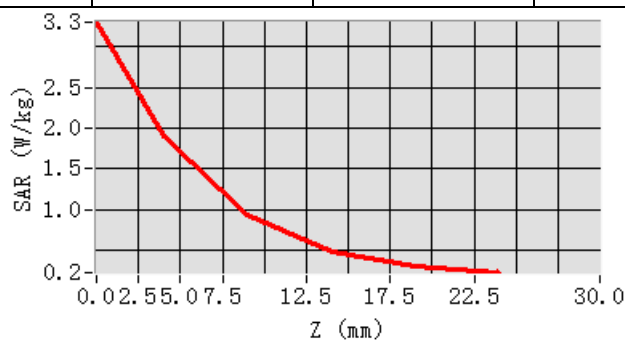

Hot spot position

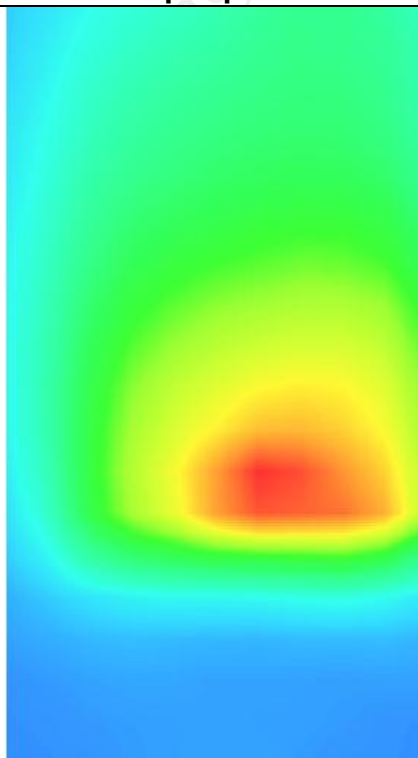


MEASUREMENT 2

Hight Band SAR (Channel 23130):


Date: 03/11/2022

Frequency (MHz)	711.000000
Relative permittivity (real part)	55.260832
Relative permittivity (imaginary part)	12.468860
Conductivity (S/m)	0.934272
Variation (%)	0.120000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 12(1 RB#0)</u>

SURFACE SAR

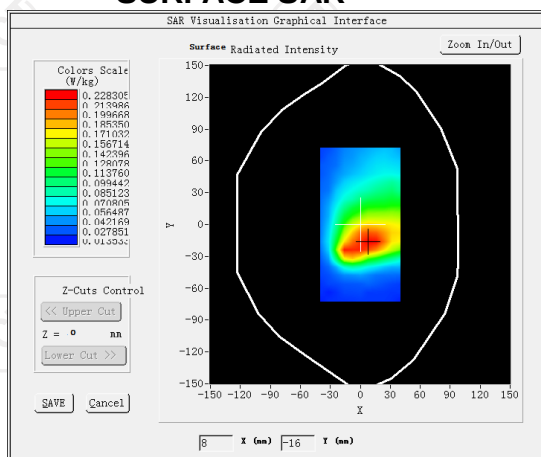


VOLUME SAR

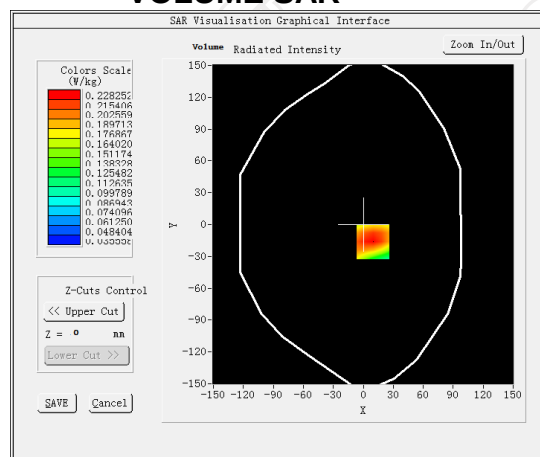


Maximum location: X=10.00, Y=-16.00 SAR Peak: 0.32 W/kg


SAR 10g (W/Kg)	0.155337
SAR 1g (W/Kg)	0.232458

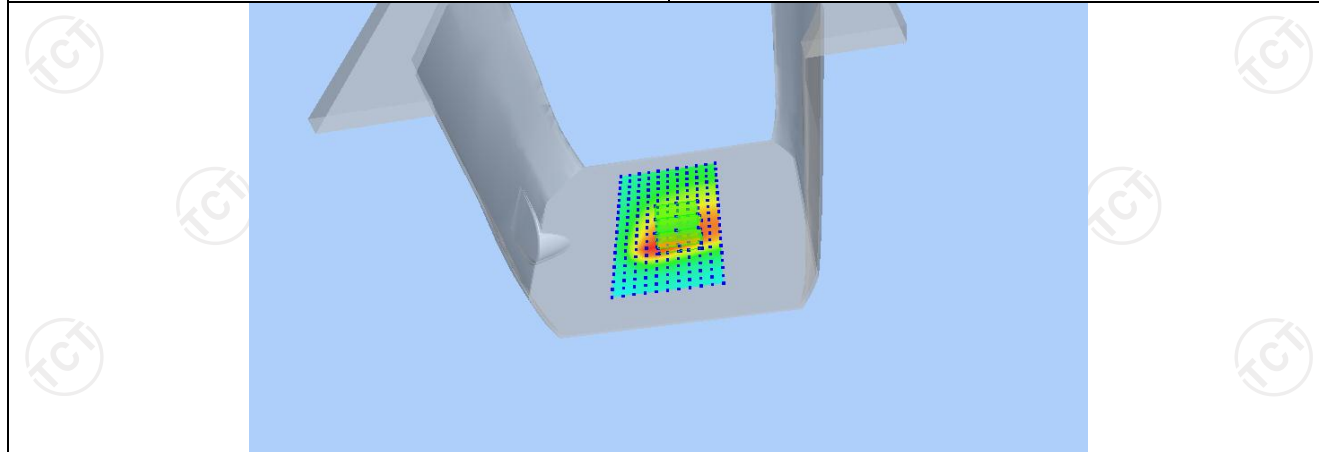

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3164	0.2283	0.1524	0.1049	0.0758

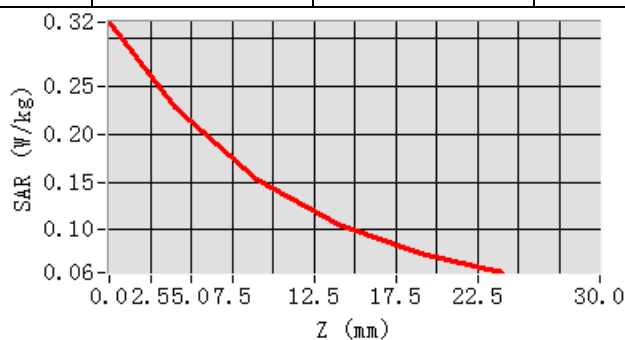

Hot spot position

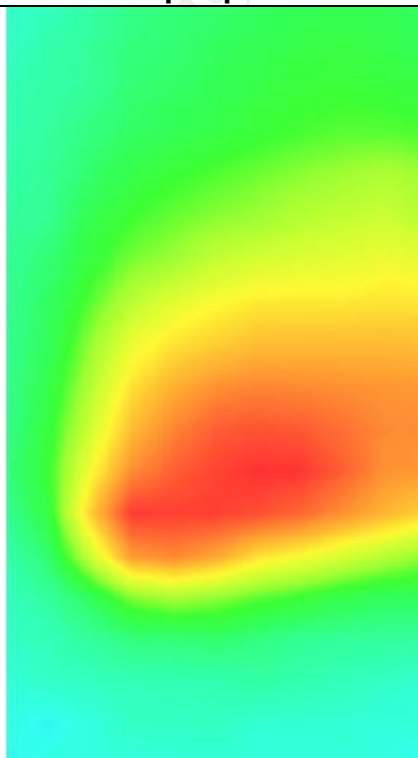


MEASUREMENT 3

Hight Band SAR (Channel 23130):


Date: 03/11/2022

Frequency (MHz)	711.000000
Relative permittivity (real part)	55.260832
Relative permittivity (imaginary part)	12.468860
Conductivity (S/m)	0.934272
Variation (%)	-2.770000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 12(1 RB#0)</u>

SURFACE SAR

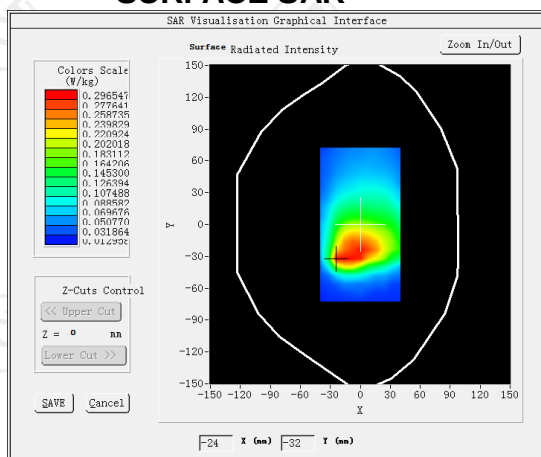


VOLUME SAR

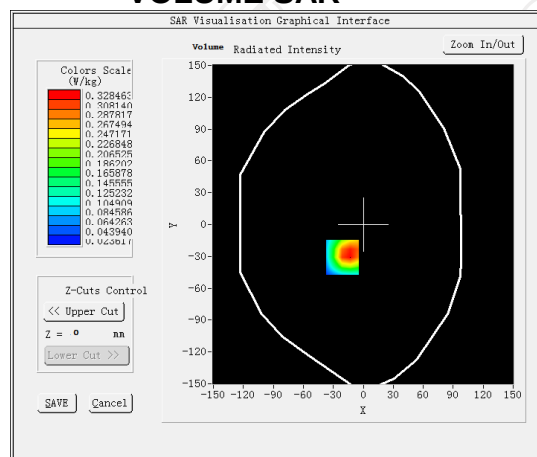


Maximum location: X=-21.00, Y=-31.00 SAR Peak: 0.59 W/kg


SAR 10g (W/Kg)	0.184414
SAR 1g (W/Kg)	0.279977

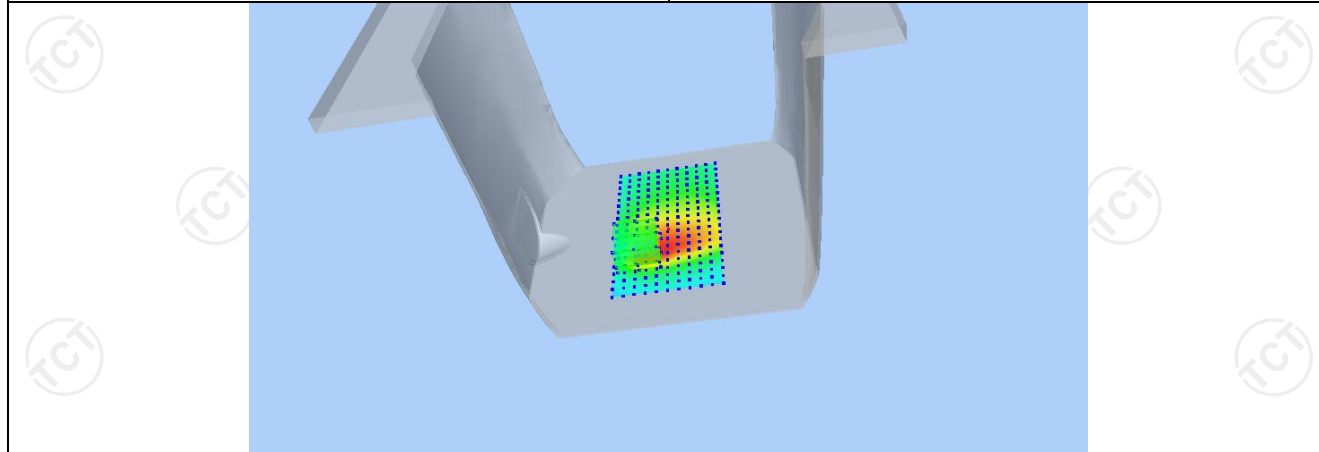

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0019	0.3285	0.1087	0.0926	0.0490

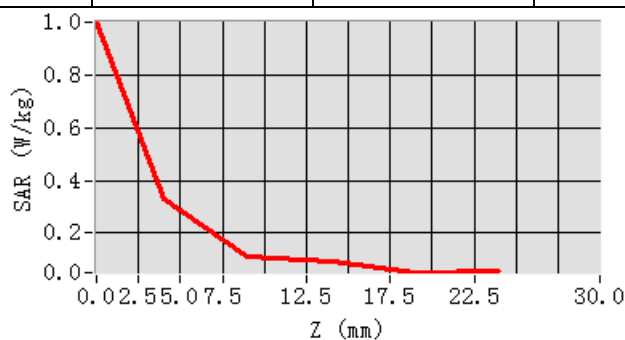

Hot spot position

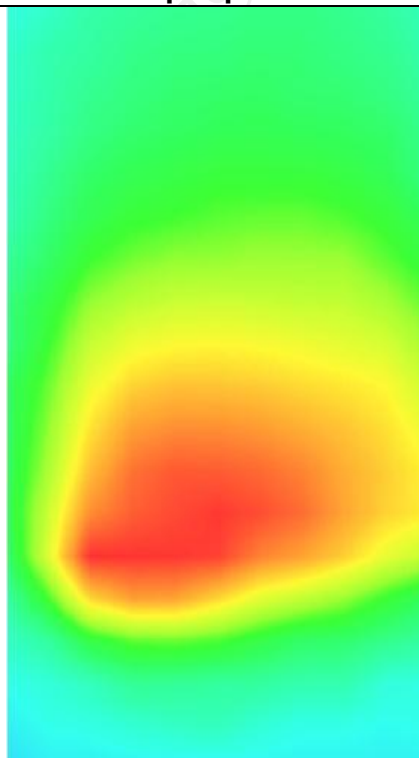

LTE Band 17


MEASUREMENT 1

Middle Band SAR (Channel 23790):


Date: 03/11/2022

Frequency (MHz)	710.000000
Relative permittivity (real part)	55.263812
Relative permittivity (imaginary part)	12.468867
Conductivity (S/m)	0.930822
Variation (%)	-1.010000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body front(10mm)</u>
Band	<u>LTE band 17(1 RB#0)</u>

SURFACE SAR

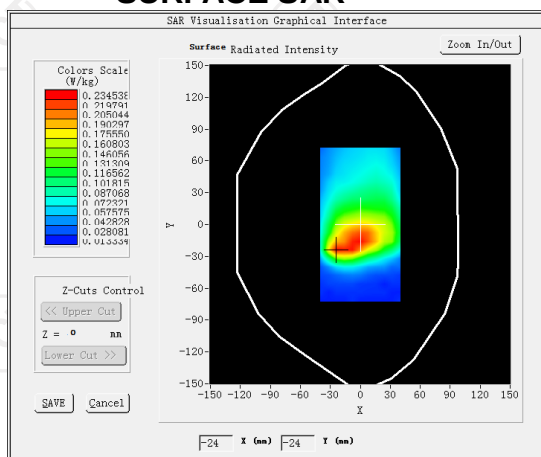


VOLUME SAR

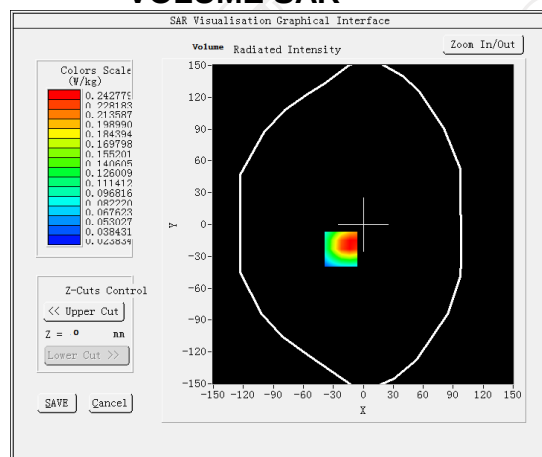


Maximum location: X=-22.00, Y=-23.00 SAR Peak: 1.00 W/kg


SAR 10g (W/Kg)	0.478416
SAR 1g (W/Kg)	0.154720

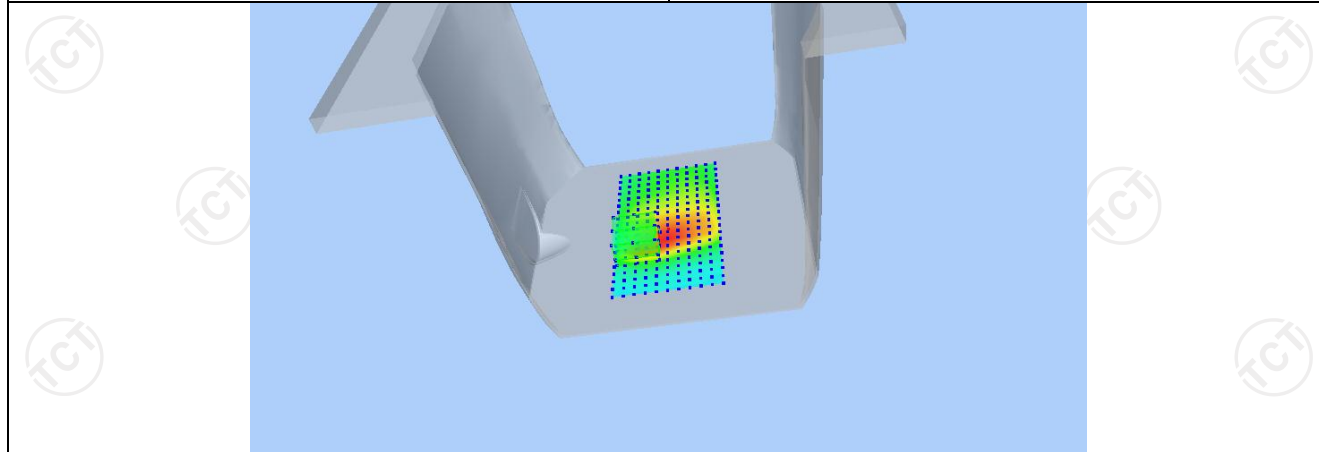

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9669	0.2428	0.0717	0.0926	0.0359

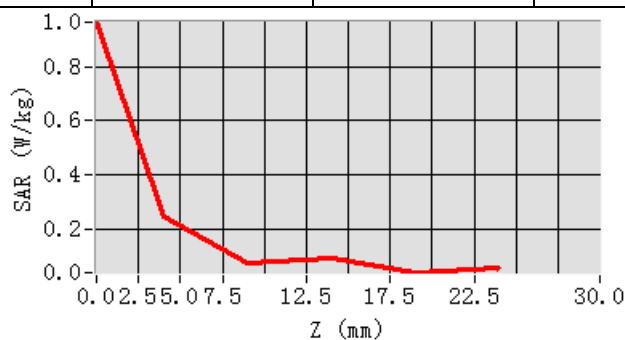

Hot spot position

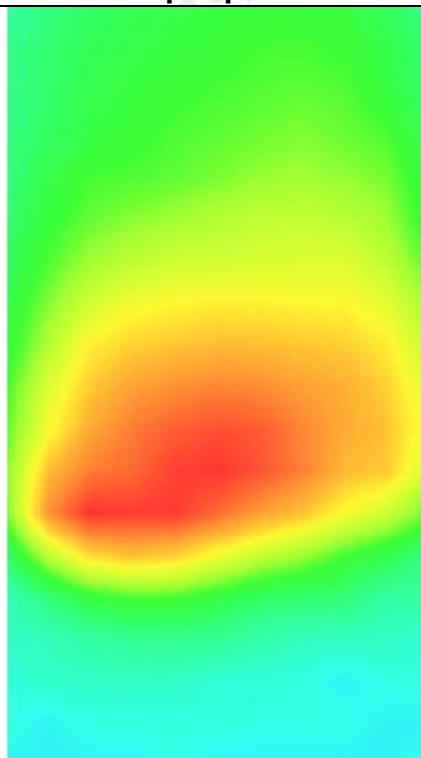


MEASUREMENT 2

Middle Band SAR (Channel 23790):


Date: 03/11/2022

Frequency (MHz)	710.000000
Relative permittivity (real part)	55.263812
Relative permittivity (imaginary part)	12.468867
Conductivity (S/m)	0.930822
Variation (%)	0.680000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 17(1 RB#0)

SURFACE SAR

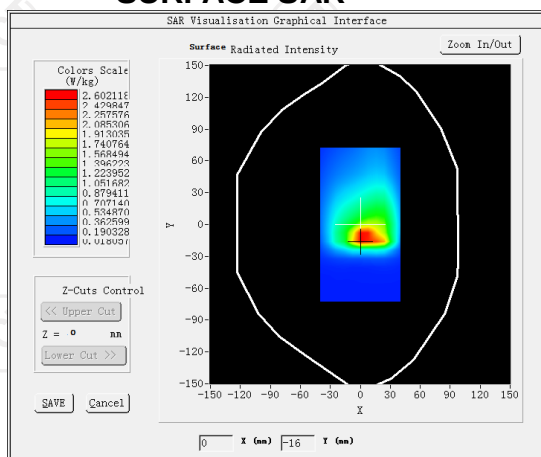


VOLUME SAR

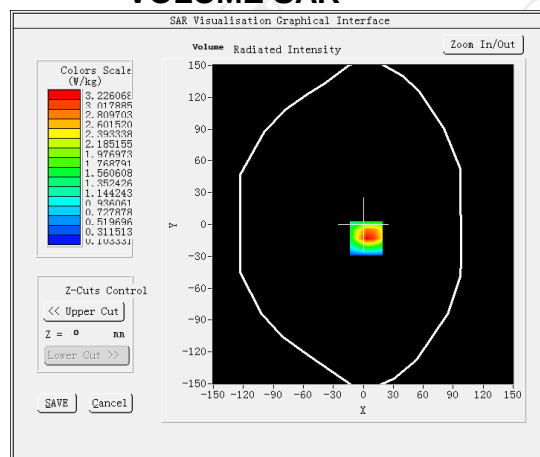


Maximum location: X=3.00, Y=-13.00 SAR Peak: 6.40 W/kg


SAR 10g (W/Kg)	1.568509
SAR 1g (W/Kg)	0.310691

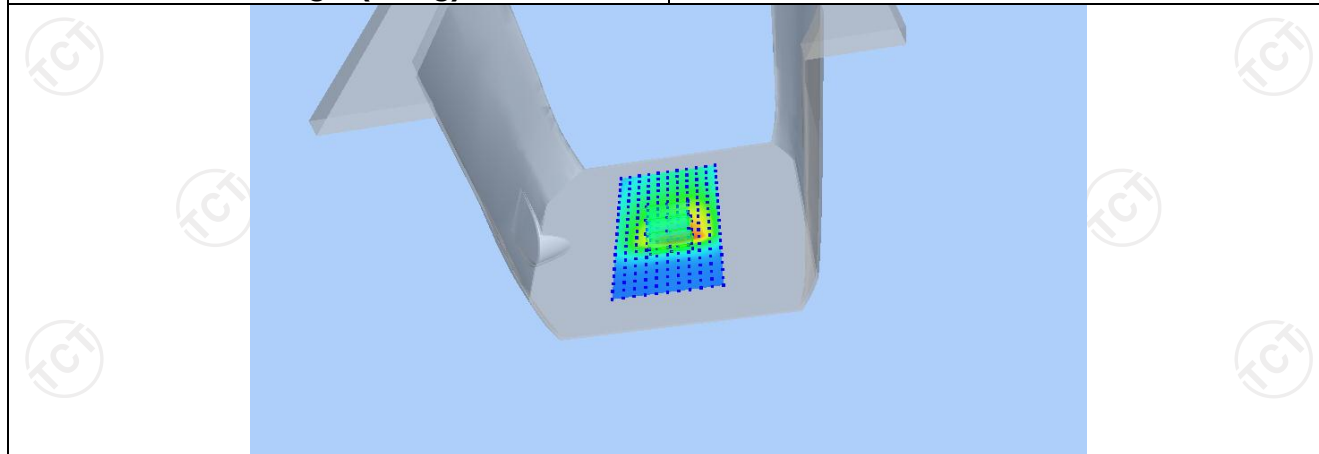

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.1435	3.2261	1.3409	0.5883	0.3457

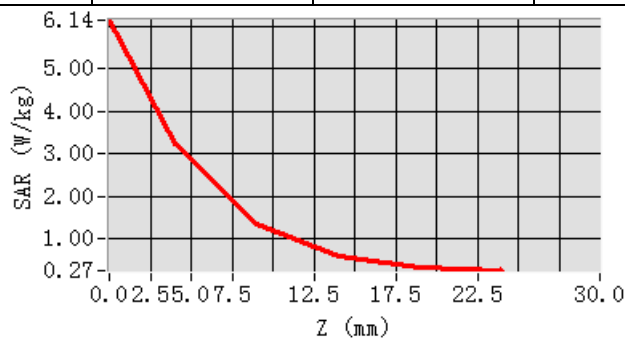

Hot spot position

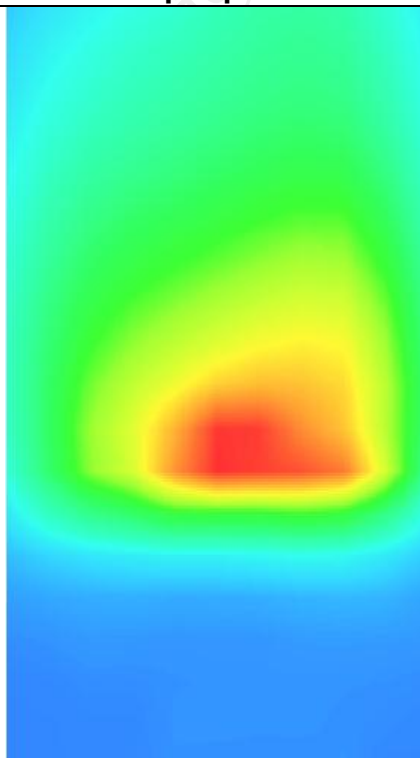


MEASUREMENT 3

Middle Band SAR (Channel 23790):


Date: 03/11/2022

Frequency (MHz)	710.000000
Relative permittivity (real part)	55.263812
Relative permittivity (imaginary part)	12.468867
Conductivity (S/m)	0.881392
Variation (%)	-1.190000
Crest Factor	1.0
Probe Conversion factor	1.86
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 17(1 RB#0)</u>

SURFACE SAR

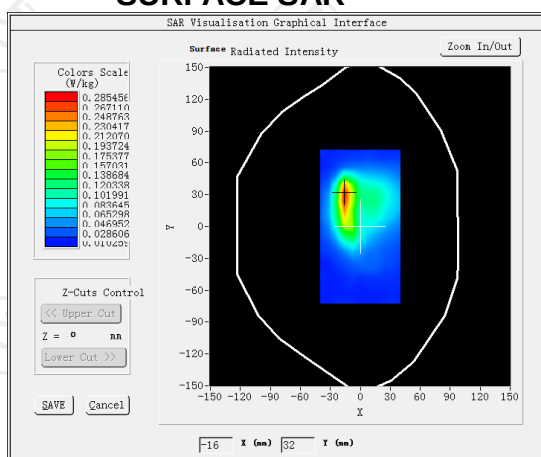


VOLUME SAR

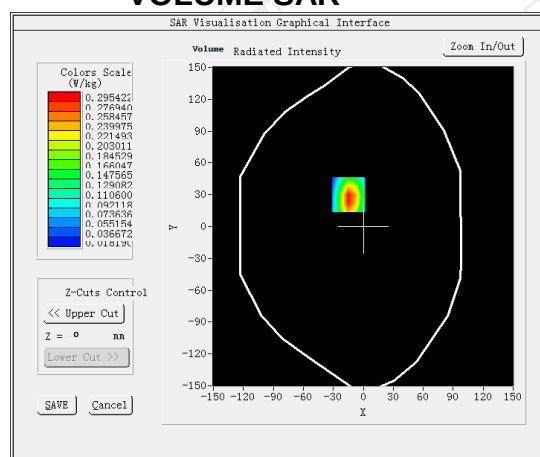


Maximum location: X=-15.00, Y=30.00 SAR Peak: 0.56 W/kg


SAR 10g (W/Kg)	0.137658
SAR 1g (W/Kg)	0.322202

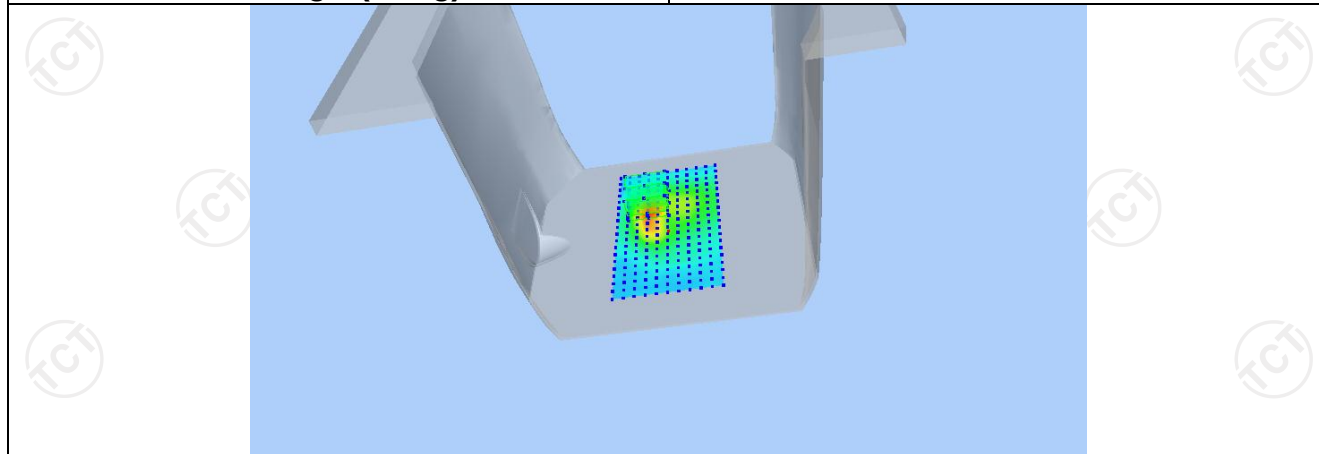

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5480	0.2954	0.1291	0.0605	0.0375

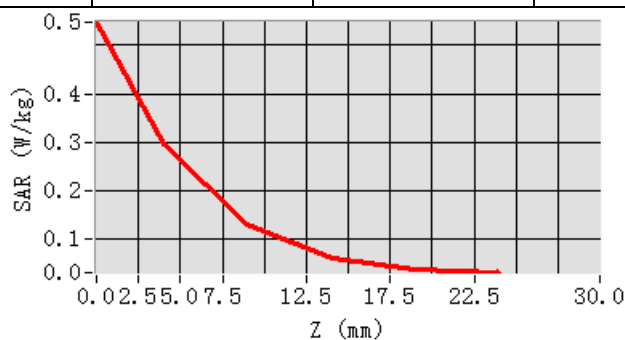

Hot spot position

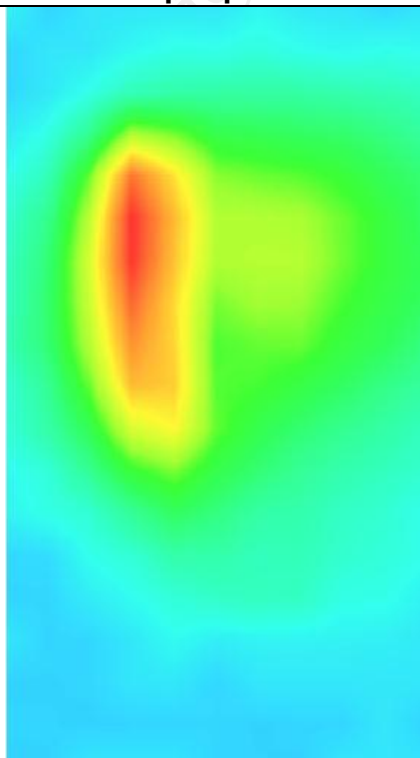


LTE Band 41


MEASUREMENT 1

Lower Band SAR (Channel 39750):		Date: 03/28/2022
Frequency (MHz)	2506.000000	
Relative permittivity (real part)	52.013887	
Relative permittivity (imaginary part)	14.935214	
Conductivity (S/m)	2.114821	
Variation (%)	-1.280000	
Crest Factor	1.0	
Probe Conversion factor	4.50	
E-Field Probe:	SSE2 (SN 36/20 EPG0346)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Validation plane	
Device Position	Body back(0mm)	
Band	LTE band 41(1 RB#0)	

SURFACE SAR

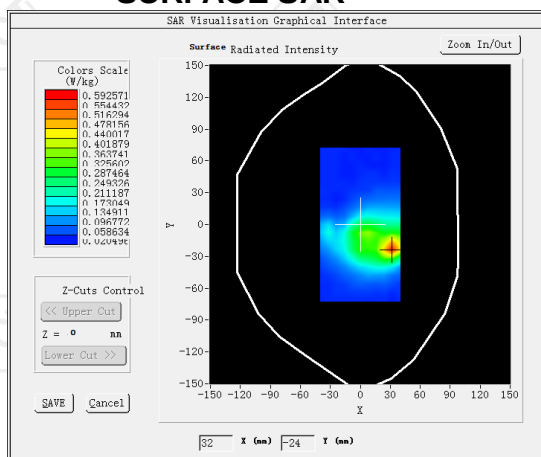


VOLUME SAR

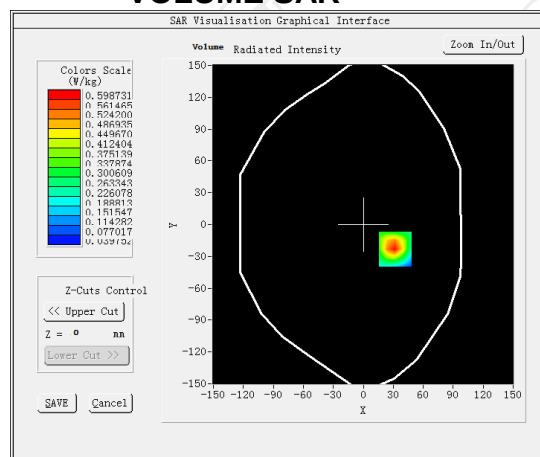


Maximum location: X=32.00, Y=-23.00 SAR Peak: 1.01 W/kg


SAR 10g (W/Kg)	0.787356
SAR 1g (W/Kg)	0.259148

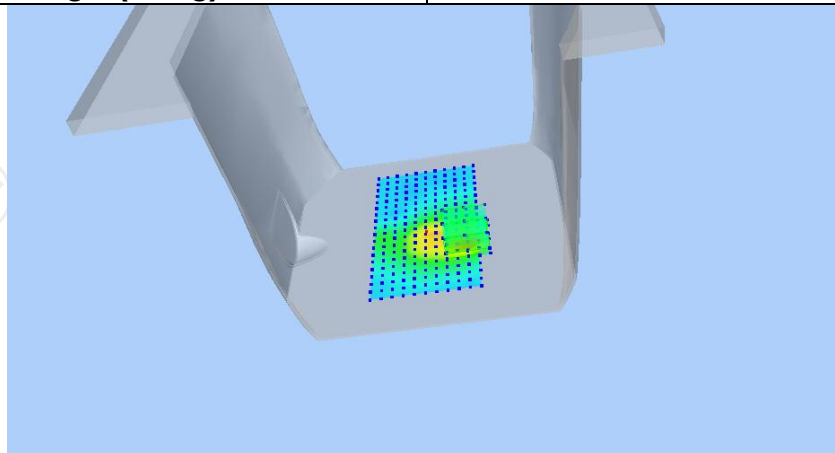

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9987	0.5987	0.3084	0.1670	0.1047

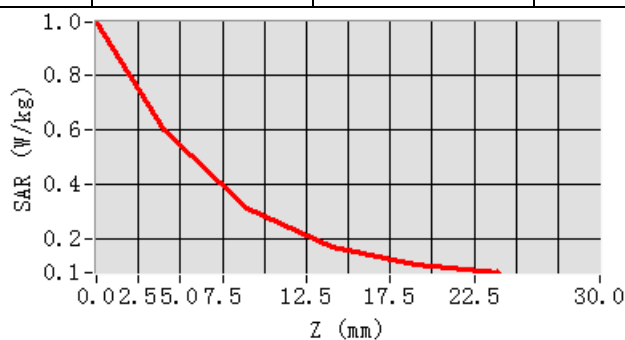

Hot spot position

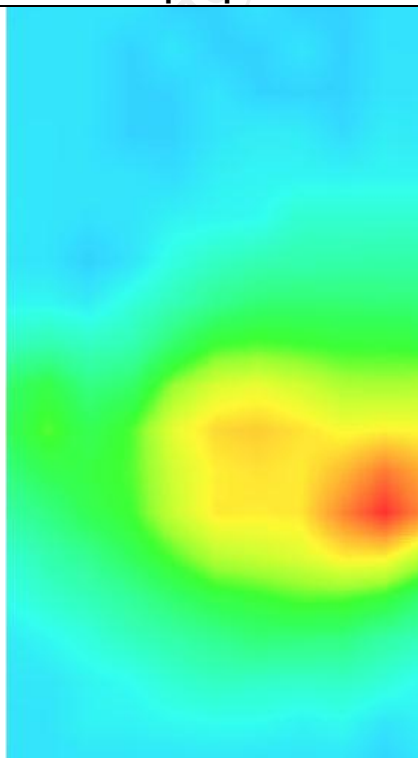


MEASUREMENT 2

Lower Band SAR (Channel 39750):


Date: 03/28/2022

Frequency (MHz)	2506.000000
Relative permittivity (real part)	52.013887
Relative permittivity (imaginary part)	14.935214
Conductivity (S/m)	2.114821
Variation (%)	-0.360000
Crest Factor	1.0
Probe Conversion factor	4.50
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(0mm)
Band	<u>LTE band 41(1 RB#0)</u>

SURFACE SAR

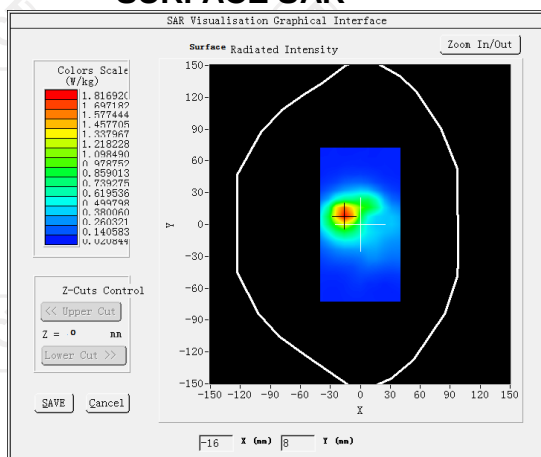


VOLUME SAR

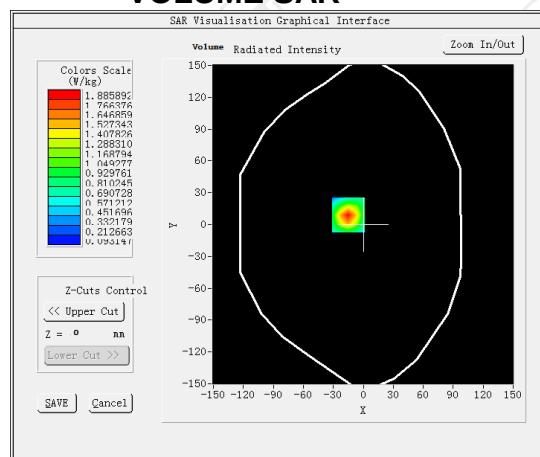


Maximum location: X=-15.00, Y=9.00 SAR Peak: 3.29 W/kg


SAR 10g (W/Kg)	0.856791
SAR 1g (W/Kg)	0.455644

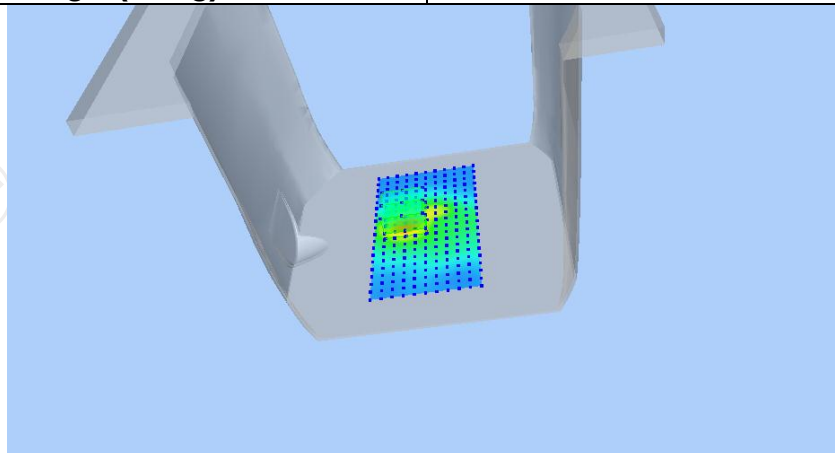

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.2743	1.8859	0.9095	0.4570	0.2705

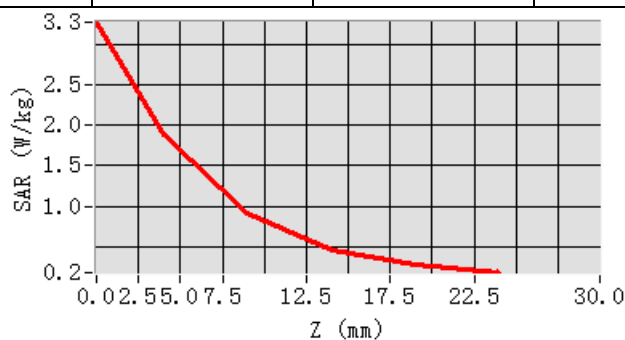

Hot spot position

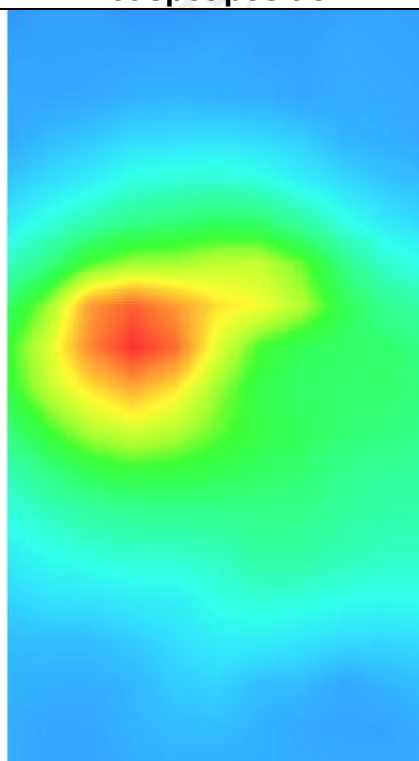


MEASUREMENT 3

Lower Band SAR (Channel 39750):


Date: 03/28/2022

Frequency (MHz)	2506.000000
Relative permittivity (real part)	52.013887
Relative permittivity (imaginary part)	14.935214
Conductivity (S/m)	2.114821
Variation (%)	-0.820000
Crest Factor	1.0
Probe Conversion factor	4.50
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(hotspot 10mm)
Band	<u>LTE band 41(1 RB#0)</u>

SURFACE SAR

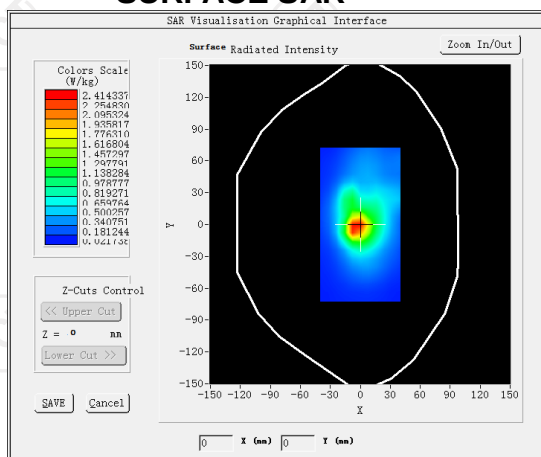


VOLUME SAR

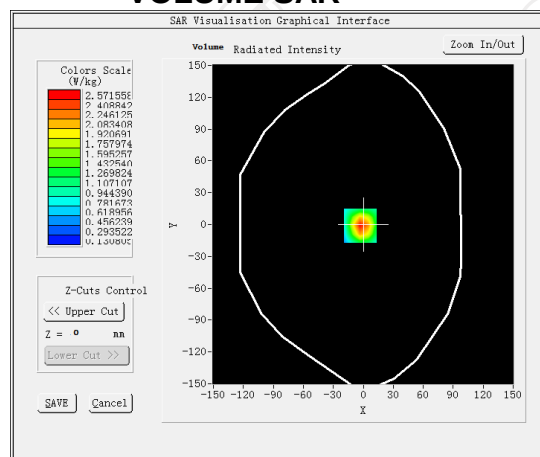


Maximum location: X=-3.00, Y=-1.00 SAR Peak: 4.56 W/kg


SAR 10g (W/Kg)	0.873477
SAR 1g (W/Kg)	0.473819

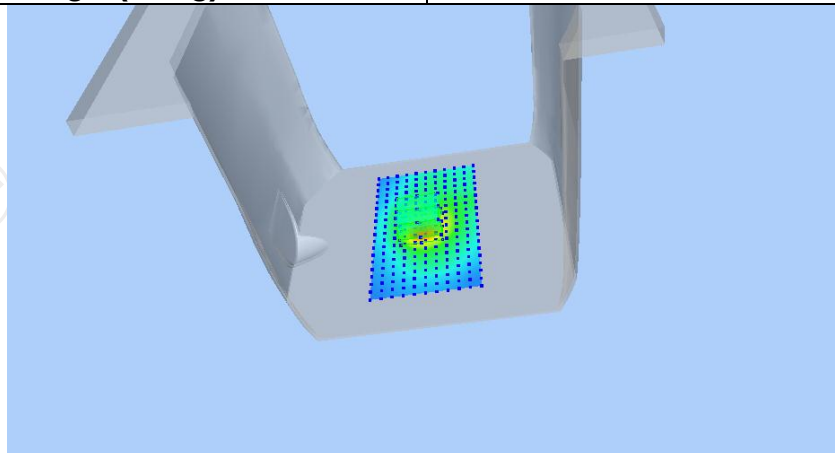

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	4.5335	2.5716	1.2103	0.5935	0.3476

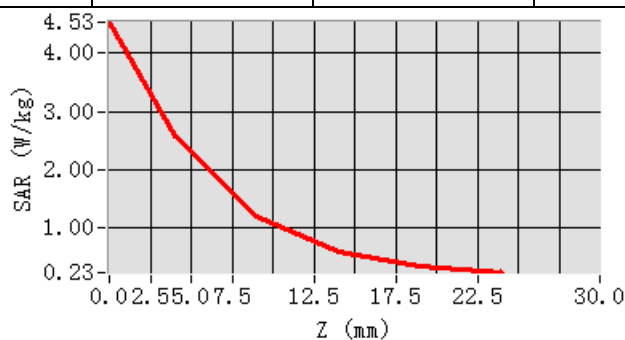

Hot spot position

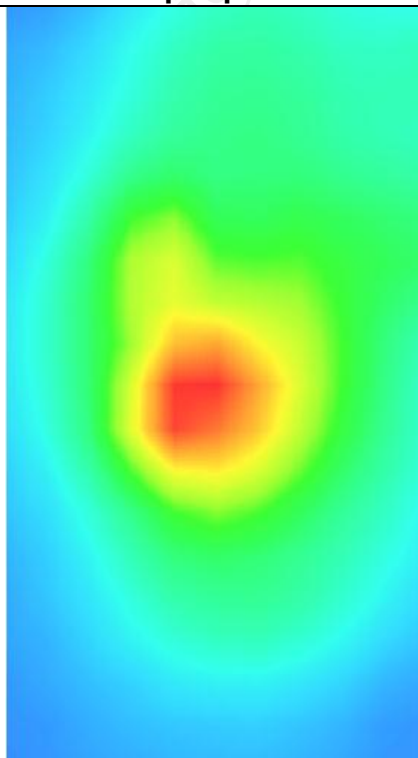

WLAN 2.4G


MEASUREMENT 1

Hight Band SAR (Channel 11):


Date: 03/25/2022

Frequency (MHz)	2462.000000
Relative permittivity (real part)	54.630667
Relative permittivity (imaginary part)	14.318428
Conductivity (S/m)	1.982536
Variation (%)	2.160000
Crest Factor	1.0
Probe Conversion factor	2.37
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body front(10mm)
Band	<u>IEEE 802.11b ISM</u>

SURFACE SAR

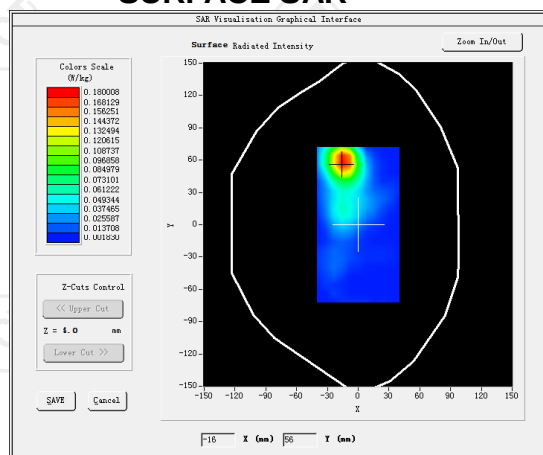


VOLUME SAR

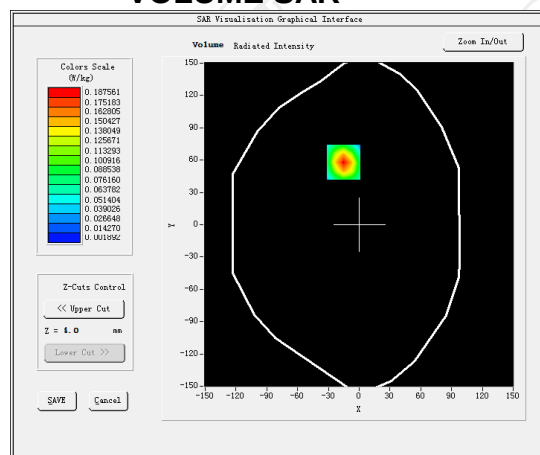


Maximum location: X=0.00, Y=16.00 SAR Peak: 2.04 W/kg


SAR 10g (W/Kg)	1.244523
SAR 1g (W/Kg)	0.146286

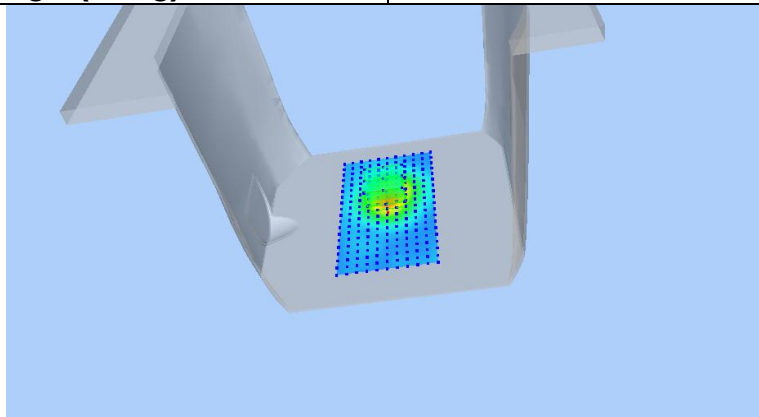

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.0373	1.3023	0.7278	0.4125	0.2476

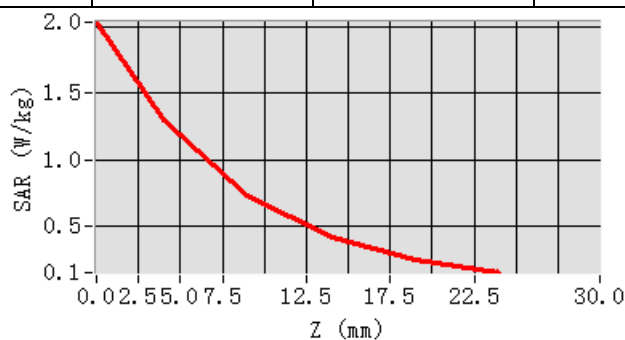

Hot spot position

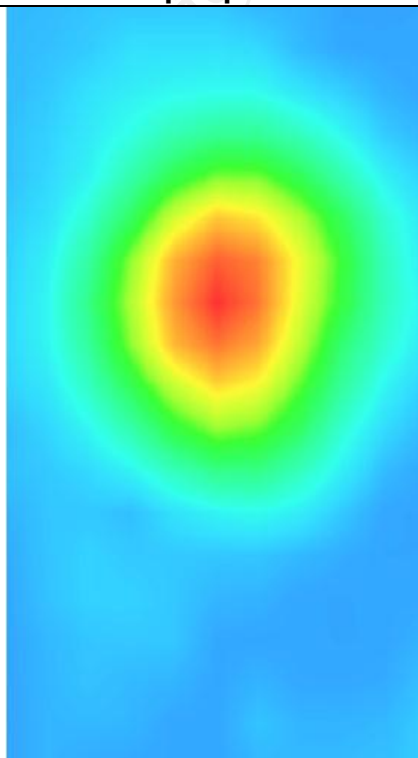


MEASUREMENT 2

Hight Band SAR (Channel 11):


Date: 03/25/2022

Frequency (MHz)	2462.000000
Relative permittivity (real part)	54.630667
Relative permittivity (imaginary part)	14.318428
Conductivity (S/m)	1.982536
Variation (%)	1.250000
Crest Factor	1.0
Probe Conversion factor	2.37
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(10mm)
Band	IEEE 802.11b ISM

SURFACE SAR

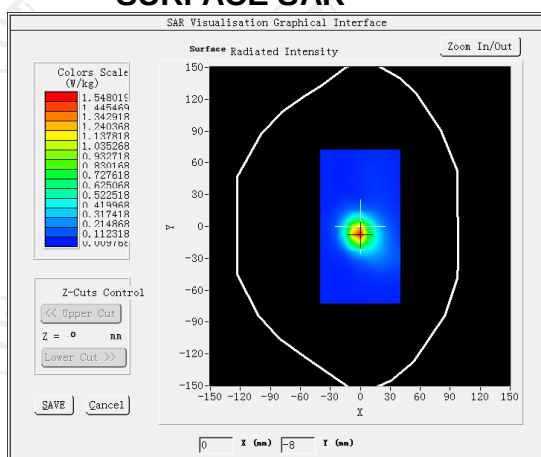


VOLUME SAR

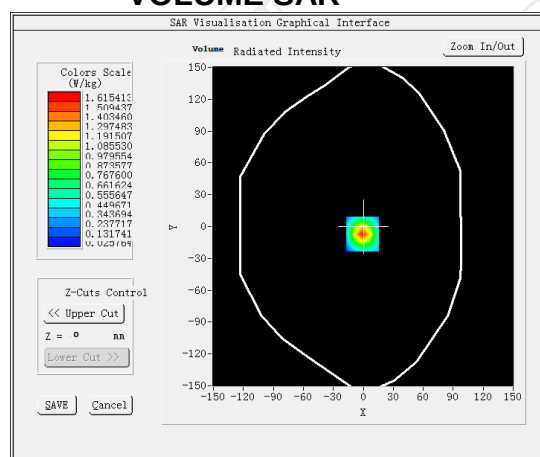


Maximum location: X=-1.00, Y=-7.00 SAR Peak: 3.48 W/kg


SAR 10g (W/Kg)	0.182670
SAR 1g (W/Kg)	0.438726

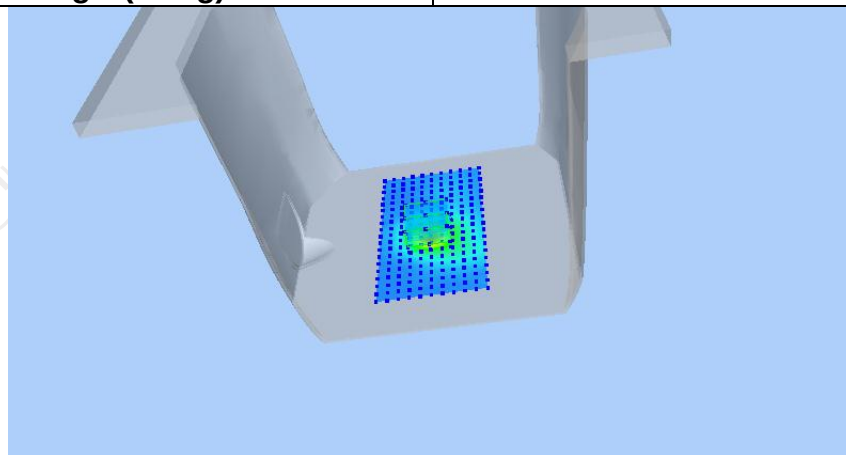

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.4980	1.6154	0.5133	0.1482	0.0600

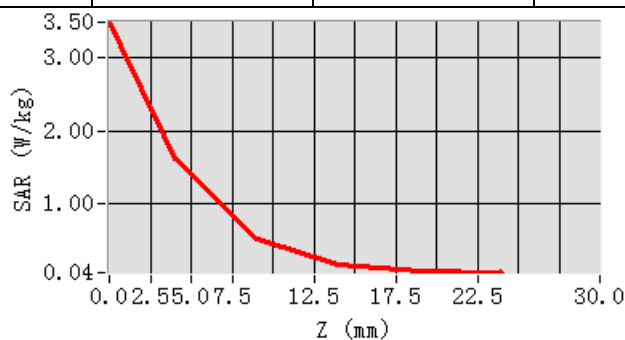

Hot spot position

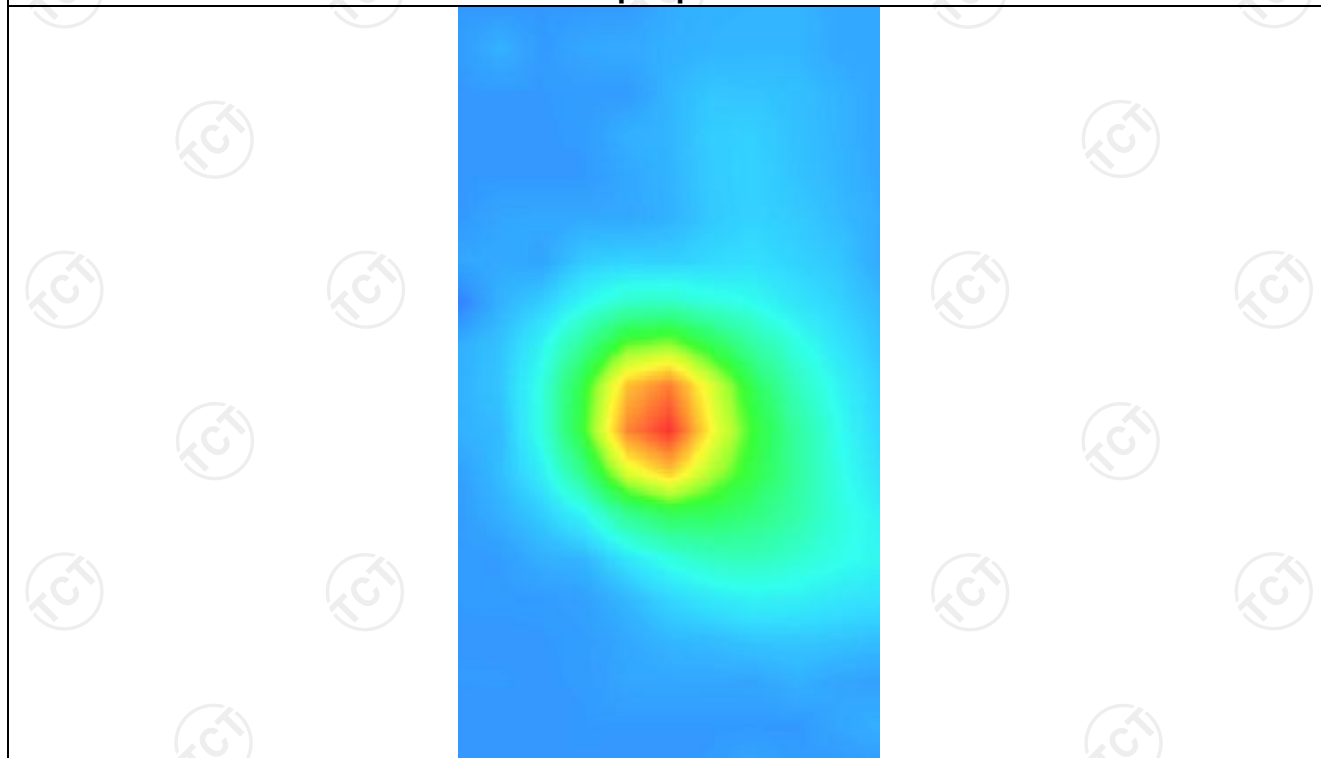


MEASUREMENT 3

Hight Band SAR (Channel 11):


Date: 03/25/2022

Frequency (MHz)	2462.000000
Relative permittivity (real part)	54.630667
Relative permittivity (imaginary part)	14.318428
Conductivity (S/m)	1.982536
Variation (%)	-3.110000
Crest Factor	1.0
Probe Conversion factor	2.37
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11b ISM(hotspot)</u>

SURFACE SAR

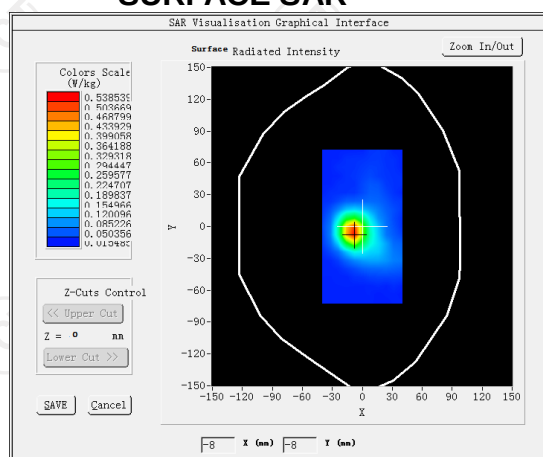


VOLUME SAR

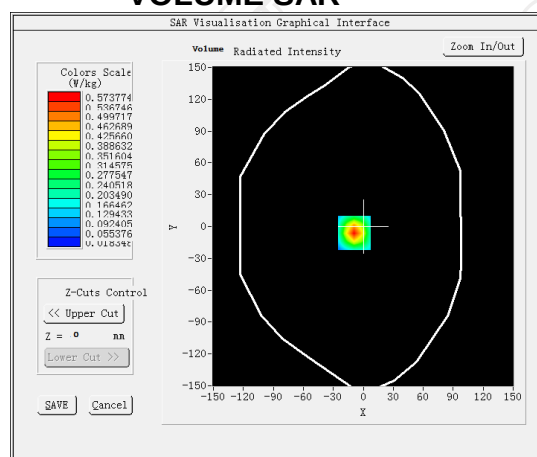


Maximum location: X=-14.00, Y=55.00 SAR Peak: 0.37 W/kg


SAR 10g (W/Kg)	0.134240
SAR 1g (W/Kg)	0.445290

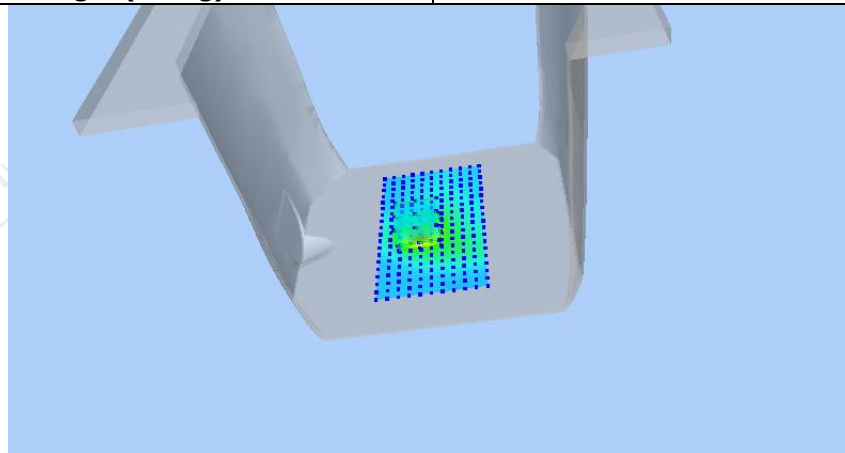

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1857	0.5738	0.2014	0.0679	0.0308

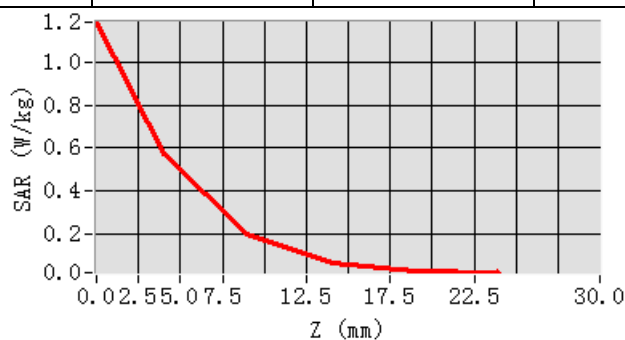

Hot spot position

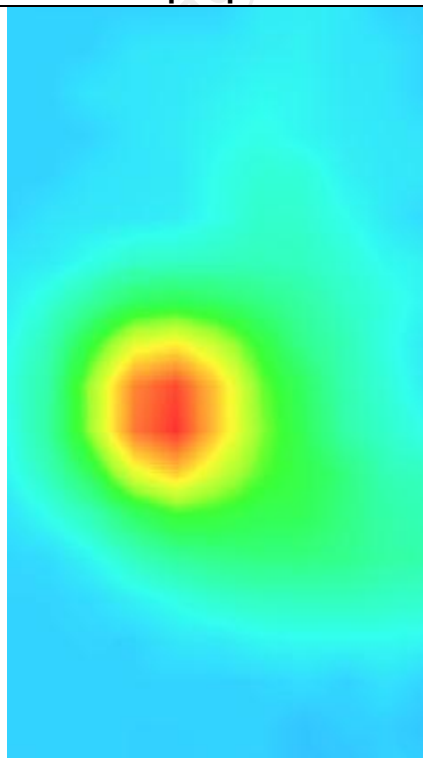

WLAN 5.2G


MEASUREMENT 1

SAR (Channel 42):


Date: 03/30/2022

Frequency (MHz)	5210.000000
Relative permittivity (real part)	50.110667
Relative permittivity (imaginary part)	21.378187
Conductivity (S/m)	5.408883
Variation (%)	1.010000
Crest Factor	1.0
Probe Conversion factor	1.56
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body front(10mm)
Band	IEEE 802.11ac HT80 ISM

SURFACE SAR

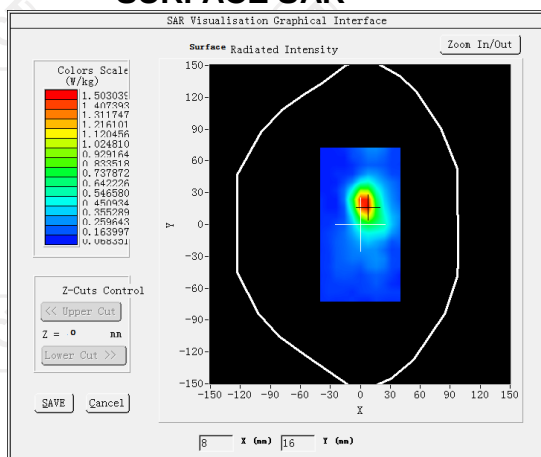


VOLUME SAR

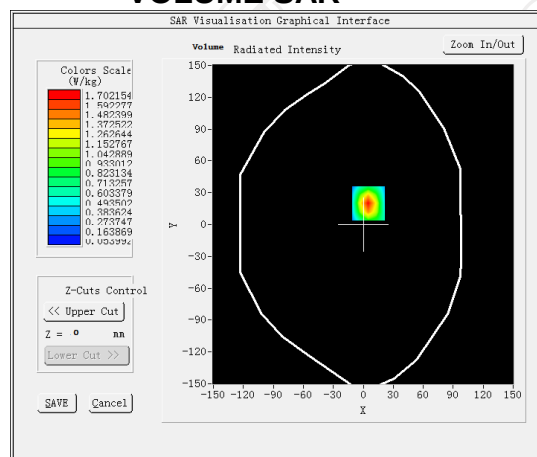


Maximum location: X=5.00, Y=20.00 SAR Peak: 2.67 W/kg


SAR 10g (W/Kg)	1.038750
SAR 1g (W/Kg)	0.118045

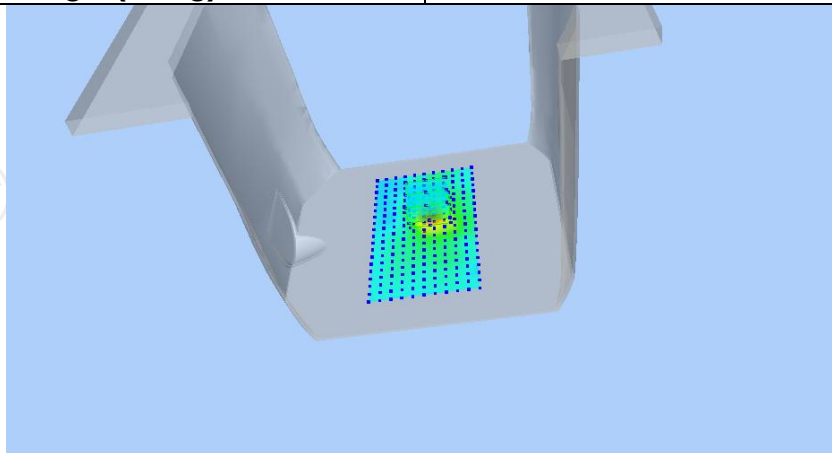

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	2.6069	1.7022	0.4979	0.1375	0.0688

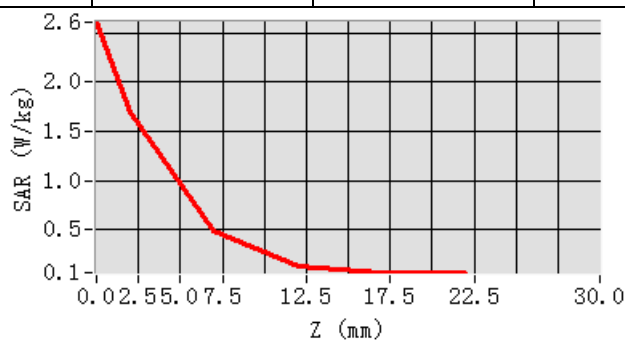

Hot spot position

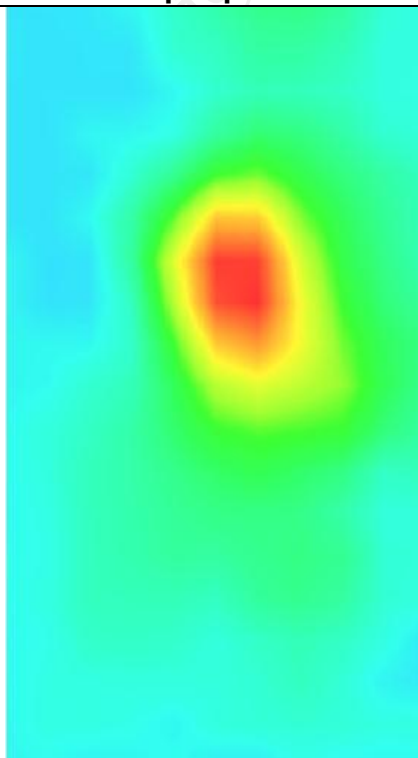


MEASUREMENT 2

SAR (Channel 42):


Date: 03/30/2022

Frequency (MHz)	5210.000000
Relative permittivity (real part)	50.112077
Relative permittivity (imaginary part)	21.378187
Conductivity (S/m)	5.408883
Variation (%)	-1.300000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(10mm)
Band	IEEE 802.11ac HT80 ISM

SURFACE SAR

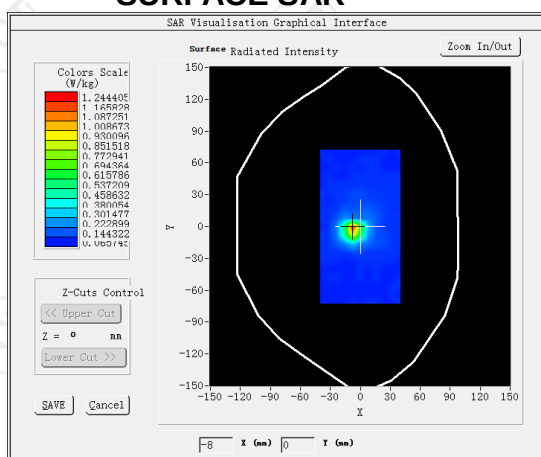


VOLUME SAR

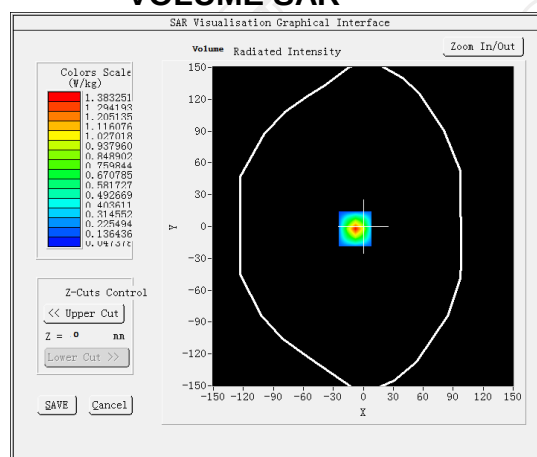


Maximum location: X=-8.00, Y=-2.00 SAR Peak: 2.32 W/kg


SAR 10g (W/Kg)	0.304653
SAR 1g (W/Kg)	0.241245

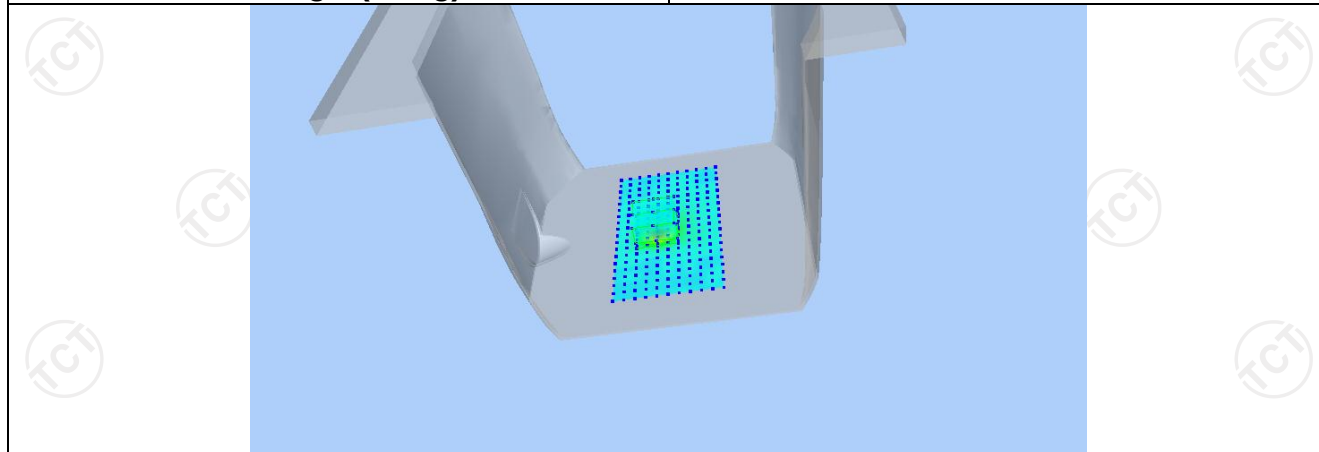

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	2.2471	1.3833	0.3184	0.0673	0.0474

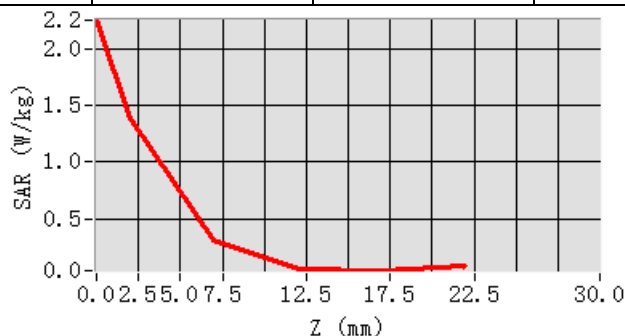

Hot spot position

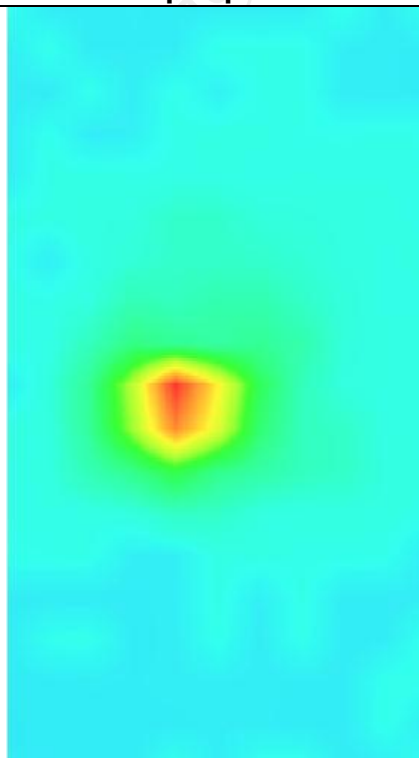

WLAN 5.3G


MEASUREMENT 1

SAR (Channel 58):


Date: 04/11/2022

Frequency (MHz)	5290.000000
Relative permittivity (real part)	50.052699
Relative permittivity (imaginary part)	15.200000
Conductivity (S/m)	5.520000
Variation (%)	3.110000
Crest Factor	1.0
Probe Conversion factor	2.37
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body front(10mm)
Band	IEEE 802.11ac HT80 ISM

SURFACE SAR

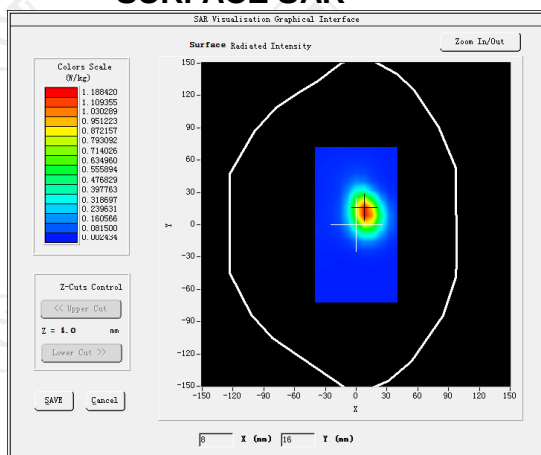


VOLUME SAR

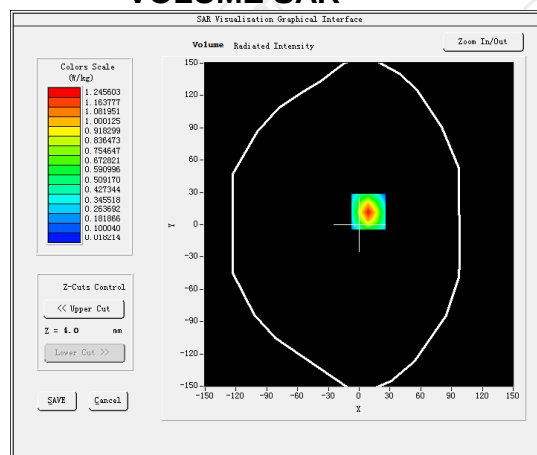


Maximum location: X=18.00, Y=35.00 SAR Peak: 0.36 W/kg


SAR 10g (W/Kg)	0.537955
SAR 1g (W/Kg)	0.154047

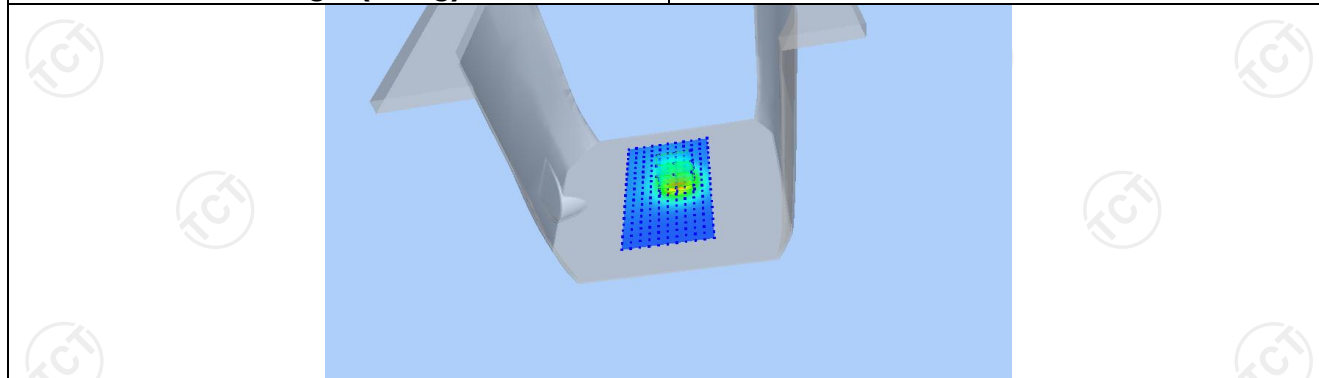

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3521	0.2840	0.2161	0.1657	0.1324

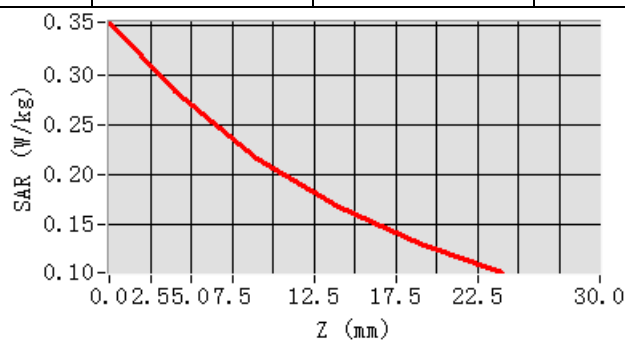

Hot spot position

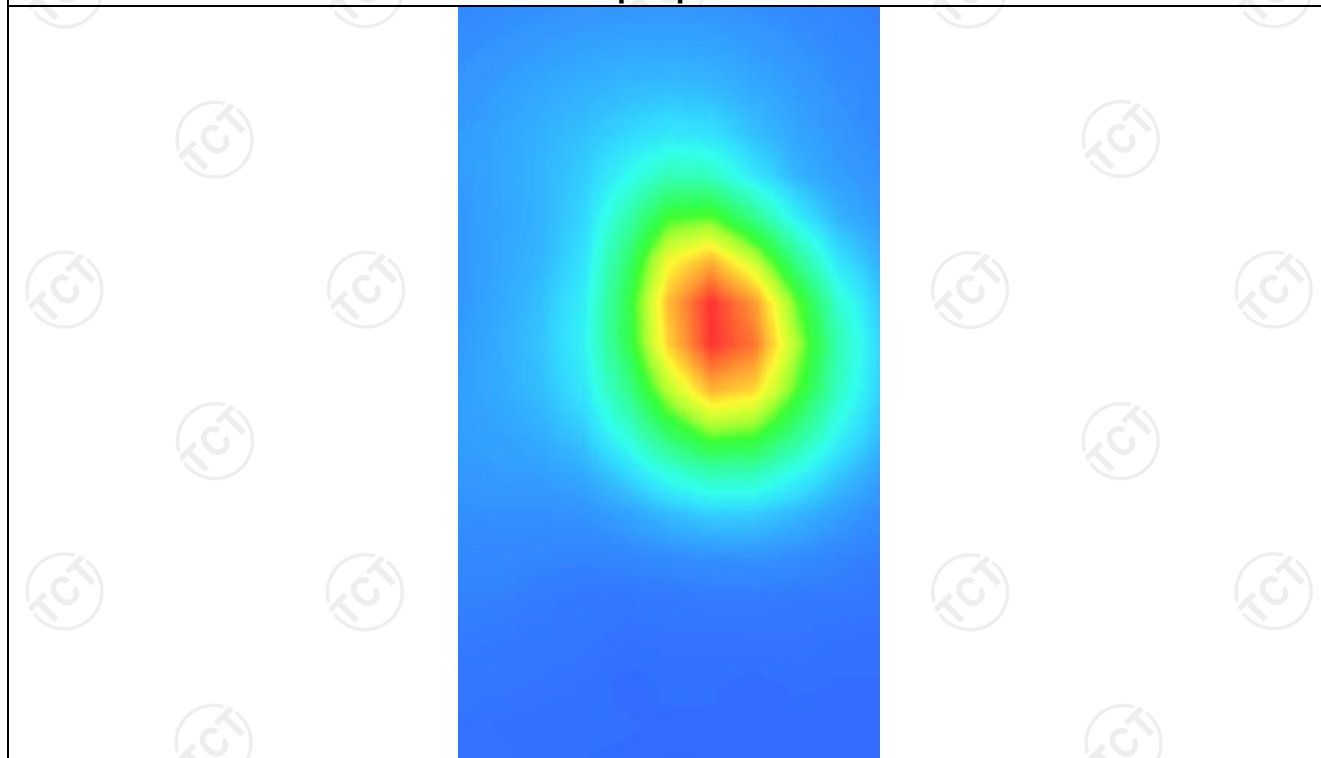


MEASUREMENT 2

SAR (Channel 58):


Date: 04/11/2022

Frequency (MHz)	5290.000000
Relative permittivity (real part)	50.052699
Relative permittivity (imaginary part)	15.200000
Conductivity (S/m)	5.520000
Variation (%)	-2.130000
Crest Factor	1.0
Probe Conversion factor	1.99
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>IEEE 802.11ac HT80 ISM</u>

SURFACE SAR

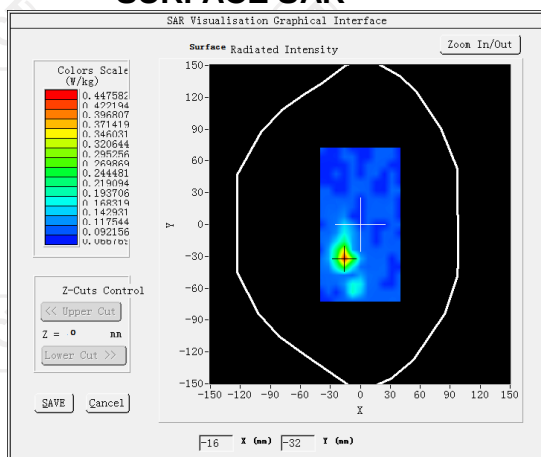

VOLUME SAR

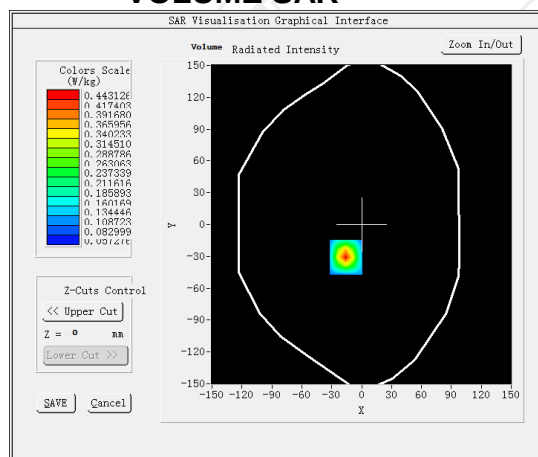


Maximum location: X=-16.00, Y=-31.00 SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)


0.145644

SAR 1g (W/Kg)


0.280391

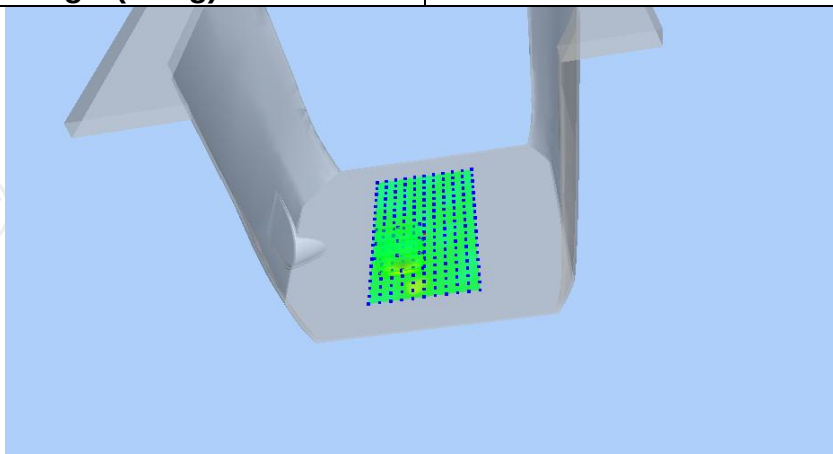

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.6652	0.4431	0.1477	0.0636	0.0615

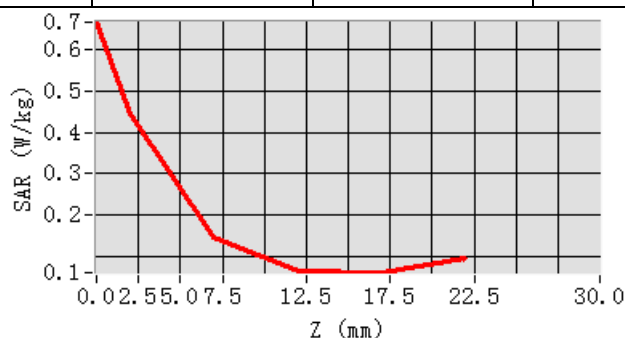

Hot spot position

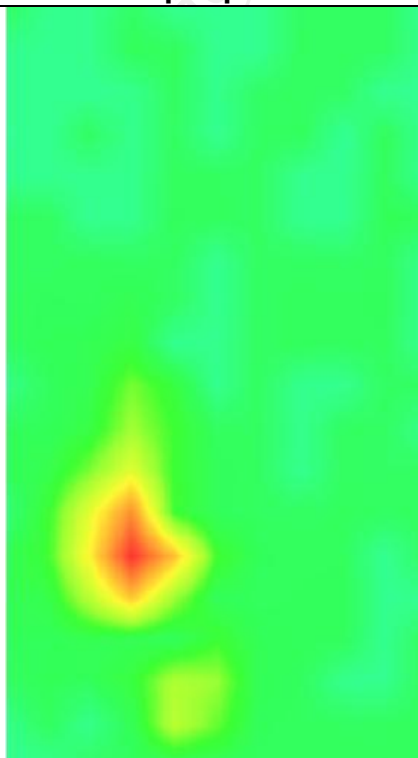

WLAN 5.8G

MEASUREMENT 1


SAR (Channel 149):

Date: 04/12/2022


Frequency (MHz)	5745.000000
Relative permittivity (real part)	47.393887
Relative permittivity (imaginary part)	14.935214
Conductivity (S/m)	6.274821
Variation (%)	-1.420000
Crest Factor	1.0
Probe Conversion factor	4.70
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body front(10mm)
Band	<u>IEEE 802.11ac HT20 ISM ISM</u>

SURFACE SAR

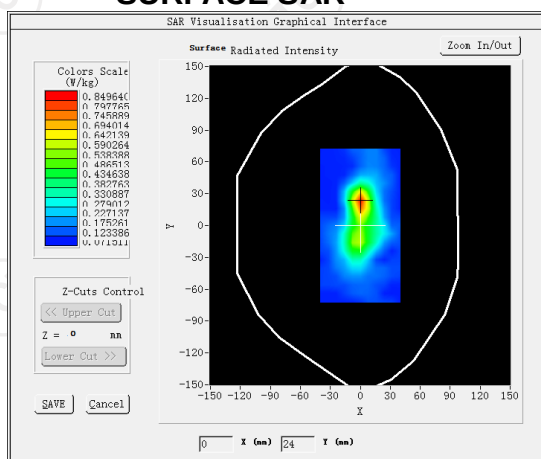


VOLUME SAR

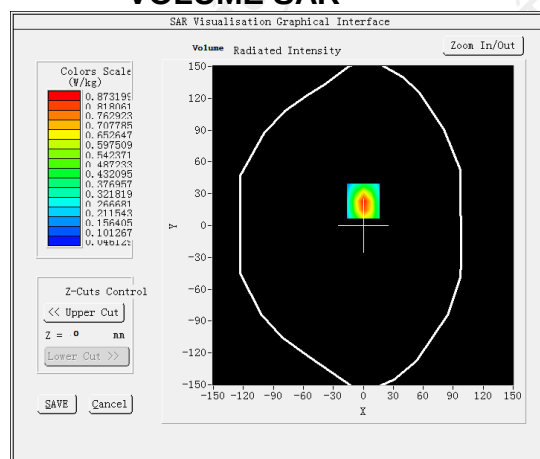


Maximum location: X=0.00, Y=23.00 SAR Peak: 1.39 W/kg


SAR 10g (W/Kg)	0.245968
SAR 1g (W/Kg)	0.144770

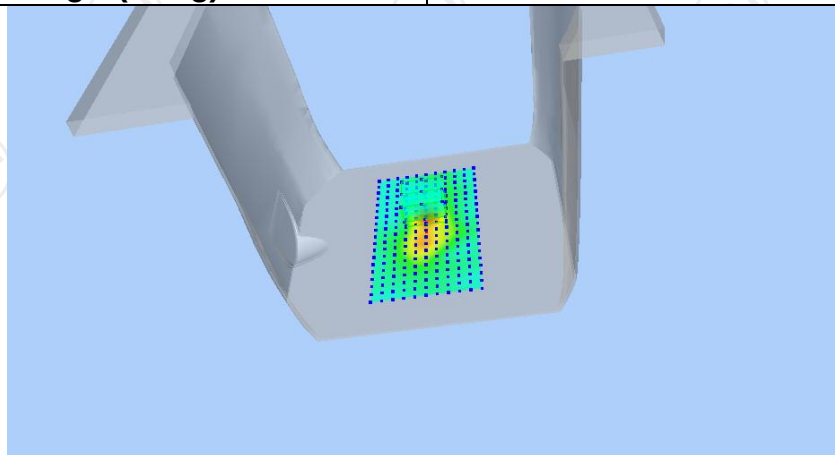

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.3365	0.8732	0.2607	0.0823	0.0550

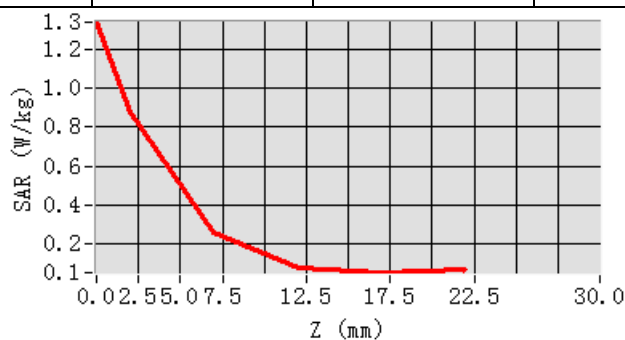

Hot spot position

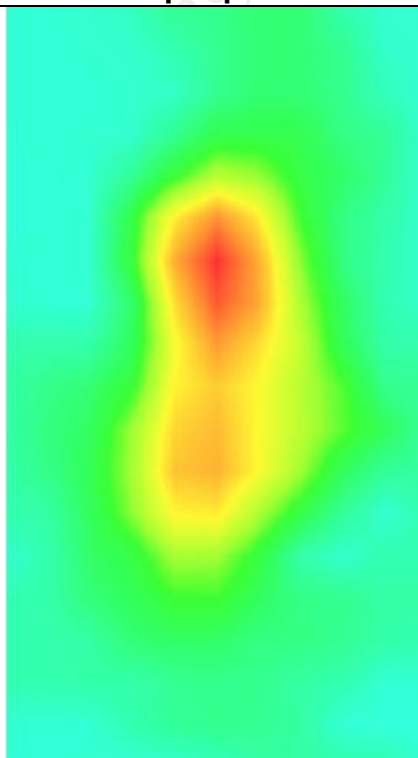


MEASUREMENT 2

SAR (Channel 149):


Date: 04/12/2022

Frequency (MHz)	5745.000000
Relative permittivity (real part)	49.759999
Relative permittivity (imaginary part)	14.329440
Conductivity (S/m)	5.970354
Variation (%)	-1.990000
Crest Factor	1.0
Probe Conversion factor	2.12
E-Field Probe:	SSE2 (SN 36/20 EPG0346)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11ac HT20 ISM ISM</u>

SURFACE SAR

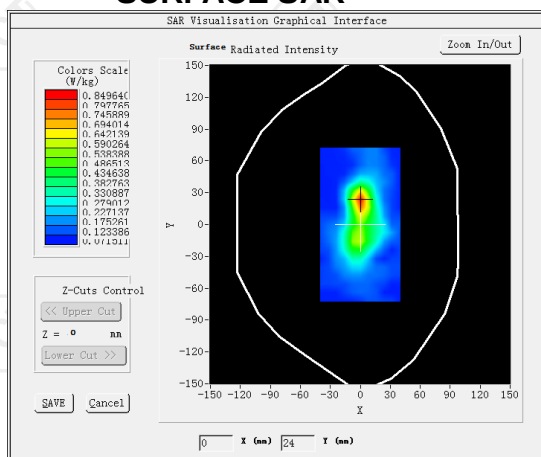


VOLUME SAR

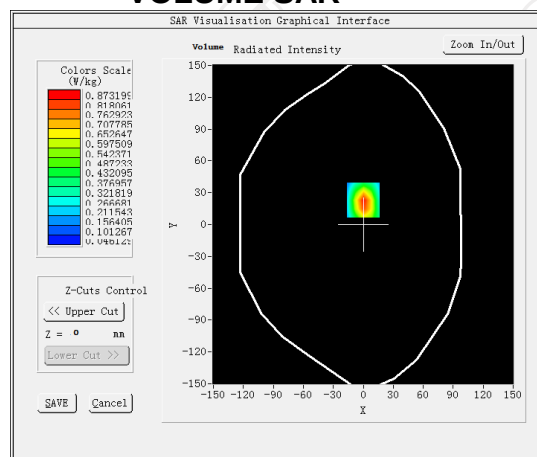


Maximum location: X=0.00, Y=23.00 SAR Peak: 1.39 W/kg


SAR 10g (W/Kg)	0.245968
SAR 1g (W/Kg)	0.304770

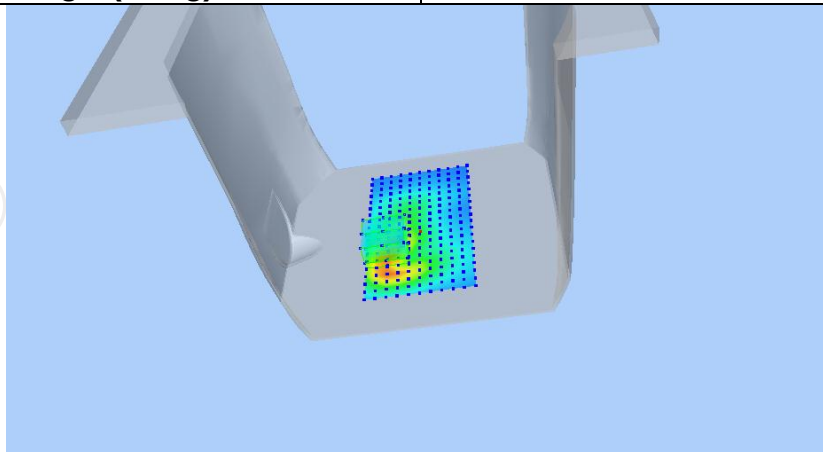

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.3365	0.8732	0.2607	0.0823	0.0550

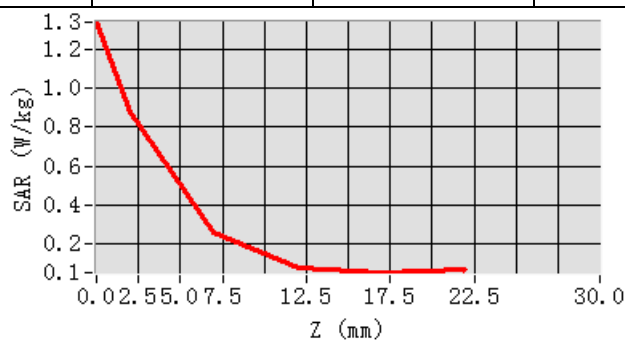

Hot spot position

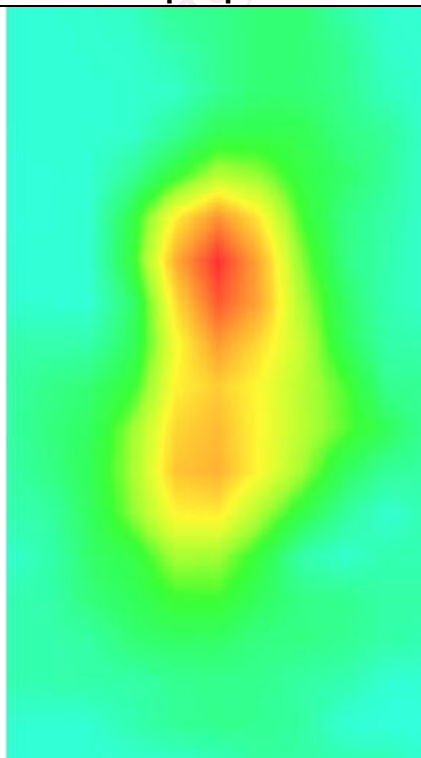

Appendix A: EUT Photos




Liquid depth




The Body Liquid of 835MHz (15.4cm)



The Body Liquid of 1800MHz (15.2 cm)

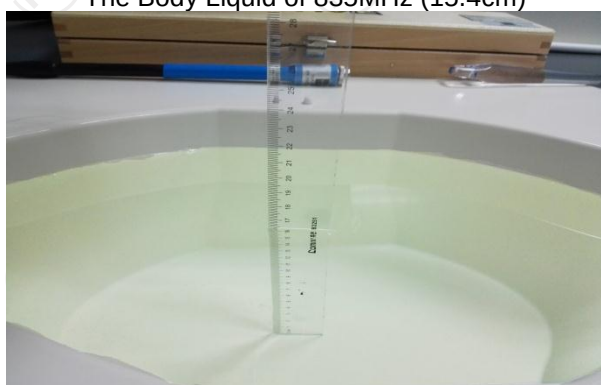

The Body Liquid of 1900MHz (16.4 cm)

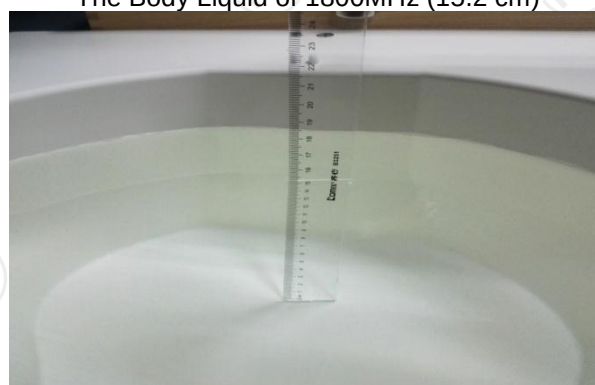

The Body Liquid of 2450MHz (15.3cm)



The Body Liquid of 2600MHz (16.5cm)



The Body Liquid of 5000-6000MHz (16.5cm)