




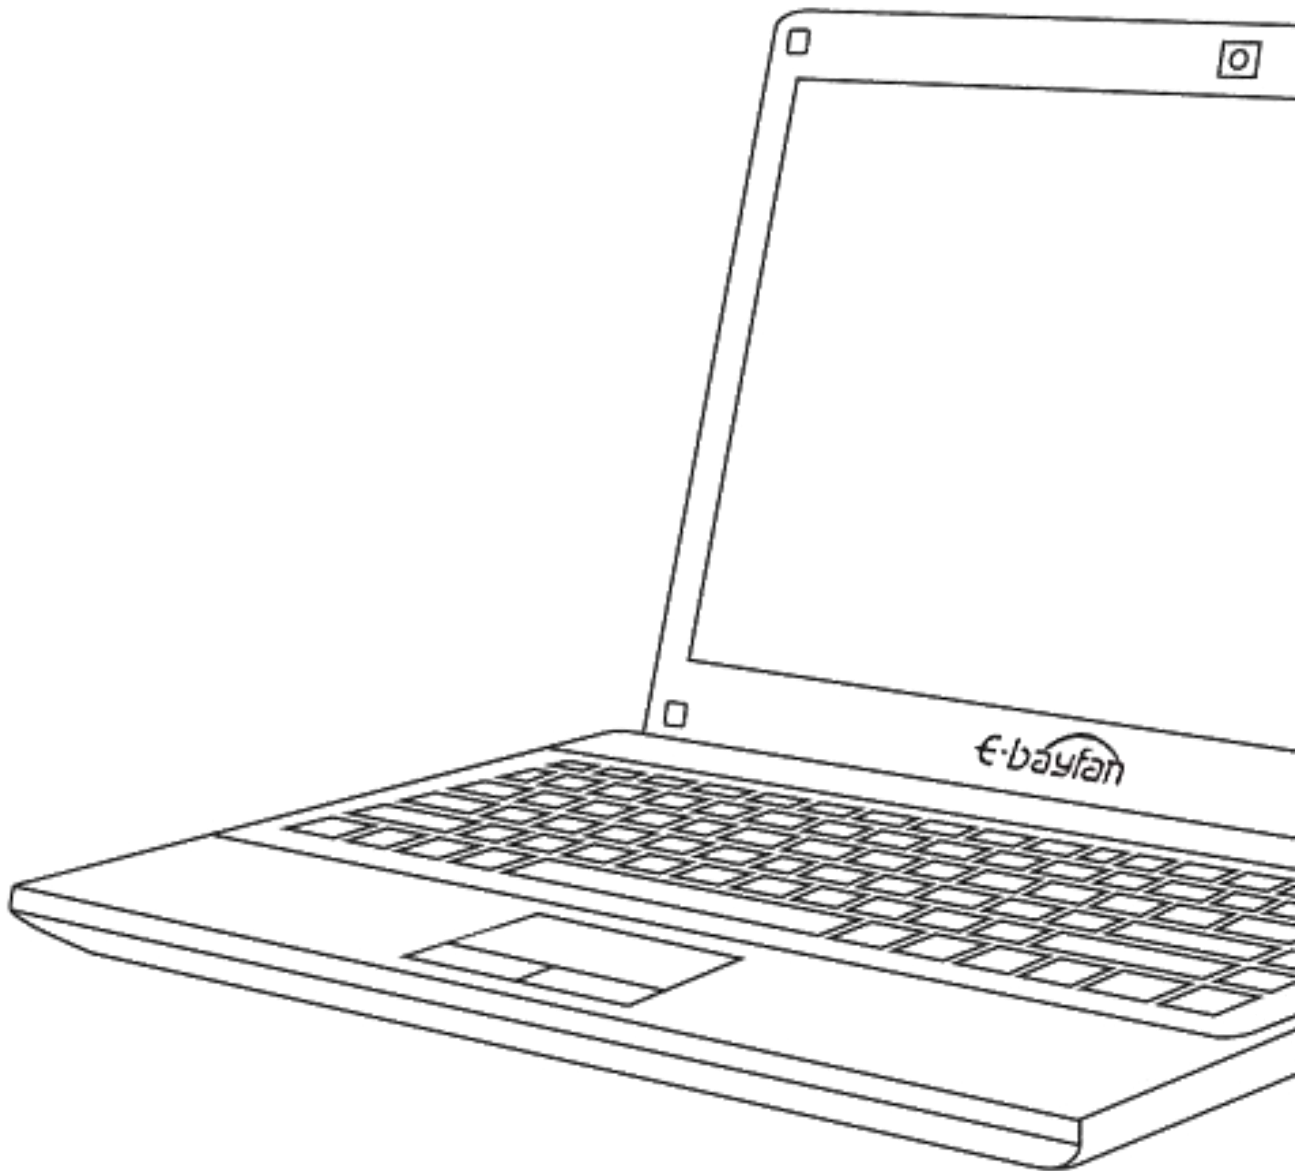

Notice

Dear Users,

Thank you for purchasing and using our products, for your safety and interests, please read this product manual and all the information that comes with it carefully before using the product. We will not be liable for any personal injury, property or other damage caused by any failure to operate and use the product in accordance with the product manual.

About this product manual:

The copyright of the manual belongs to our company;

The trademarks and names mentioned in the manual belong to their respective right holders;

If the content of the manual is inconsistent with the actual product, please refer to the actual product, actual product shall prevail.

If you have any unclear or objection to any content or terms of the manual, please submit a written objection to us within seven days after purchase, otherwise it is deemed that you have agreed, understood and accepted the entire content of the manual.

Content

1.0 Get to know your computer	3
1.1 Brief introduction	3
1.2 Parts introduction	3
2.0 Get started with Windows 10	4
2.1 Configure the operating system for the first time	4
2.2 Operating system interface	4
2.3 Put the computer to sleep mode or switch off	6
2.4 Task and desktop management	7
2.5 Connect to a wireless network	8
2.6 Getting started application	9
3.0 Basic use of common sense	9
3.1 Battery status indicator	9
3.2 Stop the computer	9
3.3 Keyboard features	10
3.4 Touch board	10
3.5 Display screen	10
3.6 Network card	1
4.0 BIOS (Basic Input Output System) settings	1
4.1 What is the BIOS Setup program	2
4.2 Use the BIOS Setup method	2
5.0 Driver installation	3
6.0 Attentions	4
6.1 Special Notice	4
6.2 Important tips for laptop use, be sure to read	4
6.3 Attentions	5
6.4 Laptop battery usage instructions	7
6.5 Safety Instructions	10
7.0 Fault analysis and treatment	11
7.1 Problems with sound	11
7.2 Problems with the hard disk	11
7.3 Problems with the monitor	12
7.4 Problems with memory	12
7.5 Sleep problems	12
8.0 Special Notice	14
Appendix A Product Specifications	15


1.0 Get to know your computer

1.1 Brief introduction

- Product : Laptop
- Item number: YBF001
- Product performance features: using AMD mobile computing technology
- System extensibility: The system allows the capacity of the hard disk to be upgraded and replaced, please consult your local dealer or go to the designated maintenance department when replacing the replacement of the capacity expansion.
- Clear LCD display: The laptop has an LED-backlit LCD screen that gives you clear and bright color text and pictures.

1.2 Parts introduction

(Note: The following are schematic diagrams, please refer to the actual product)

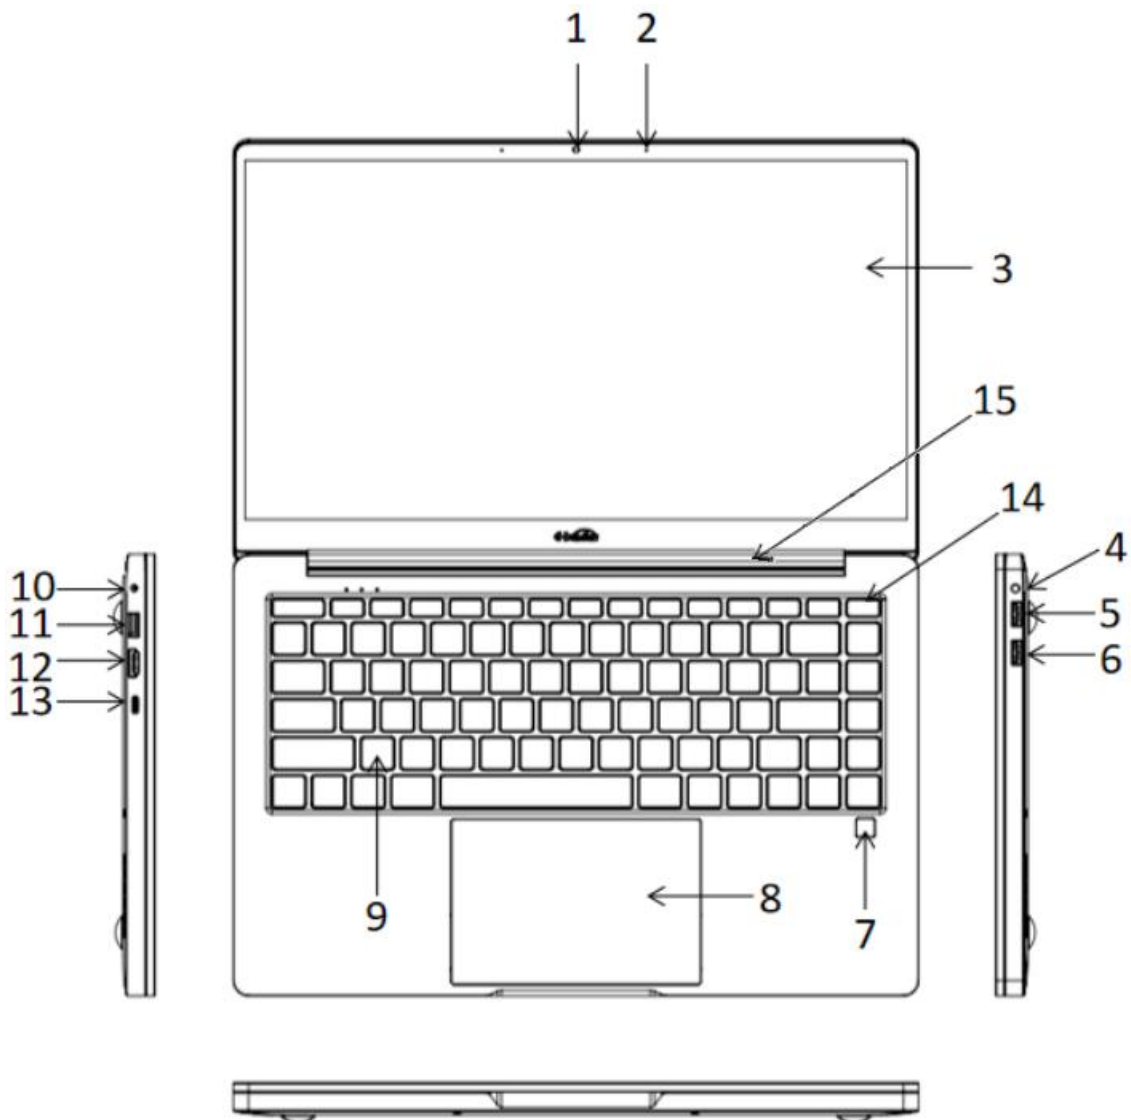

Attention

- Do not open the display screen more than a 140-degree angle. When closing the display, be careful not to leave pens or any other objects between the display screen and the keyboard, as this may damage the display.

2.0 Get started with Windows 10

Code	Name	Function description
1→2	Built-in microphone	Capture sound for video conferencing, dubbing, or recording
3	Display screen	Provides vibrant visual output
4	Audio interface	Used for headsets
5-6-11	USB	Blue color port is USB3.0, black color port is USB2.0
7	Fingerprint button	Once the screen is encrypted, it can be unlocked by fingerprint
8	Touch board	The touch board acts like a traditional mouse, and the cursor on the screen moves in the same direction that your fingertips swipe across the touch board
9	Keyboard	The keyboard is the most critical input device of the computer, through which various instructions and data can be input to the computer and command the work of the computer
10	Power plug	Connect the AC power adapter
12	HDMI	Use Micro HDMI to connect external devices
13	type-c port	Multifunctional port for Type-C
14	Power switch	Press it to turn on laptop

2.1 Configure the operating system for the first time


The first time you use it, you need to configure the operating system. The configuration process might include the following steps

- Accept the End User License Agreement
- Configure an Internet connection
- Register the operating system
- Create a user account

2.2 Operating system interface

Windows 10 has a powerful and very useful start menu. To open the Start menu, please do one of the following

- Press the Windows logo key  on your keyboard
- Select Start in the lower-left corner of the desktop .

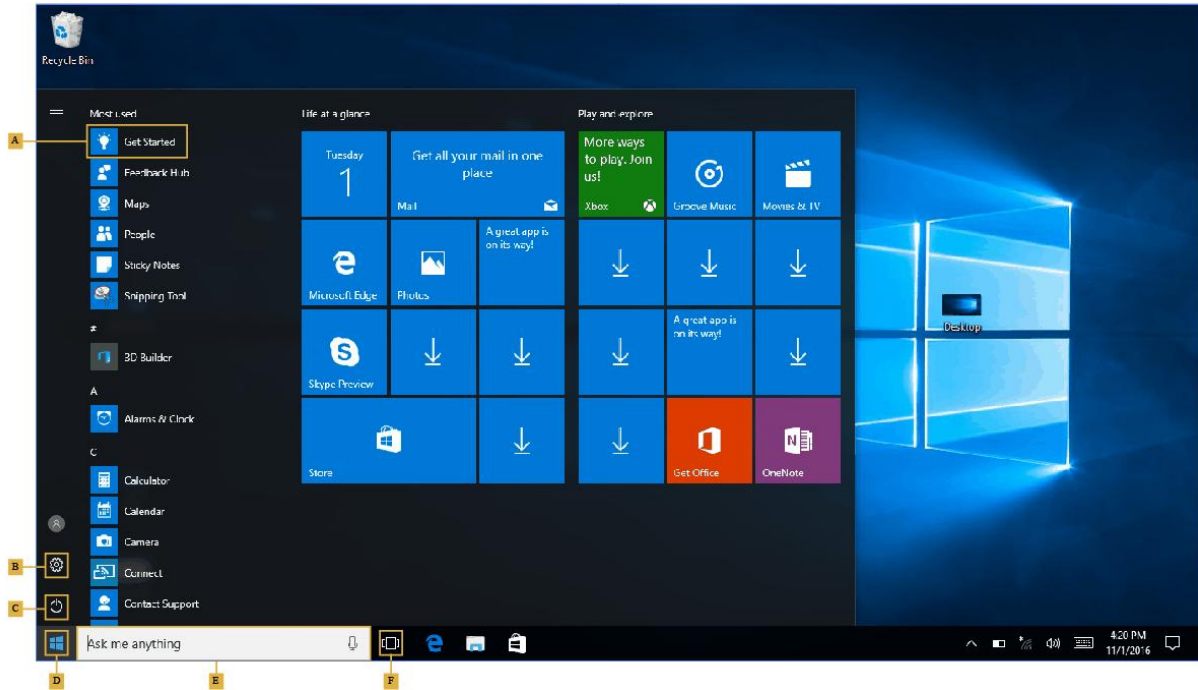


Code	Function introduction	Code	Function introduction
1	Getting started with the application	5	Start button
2	Set button	6	Search box
3	Power switch	7	Task view button

• Set up

Settings allow you to perform basic tasks. You can also search for more settings through the settings search box in the upper right corner. To open the settings, please do the following:


- Open the Start menu and select Settings .

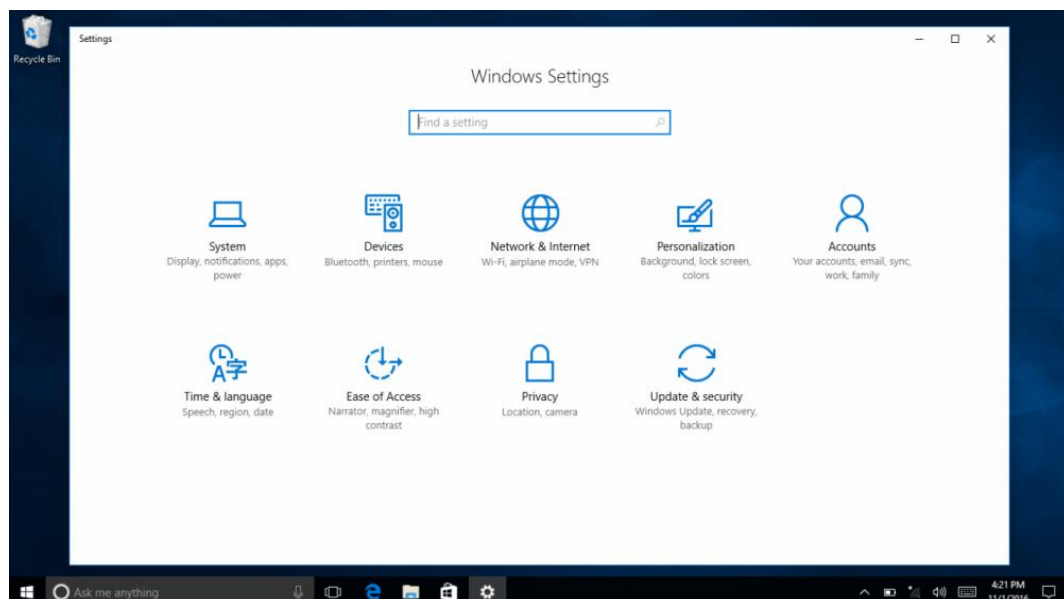

- **Personalize the start menu**

You can personalize the start menu using favorite application . To personalize the Start menu

- 1) Please do the following: 1 open the start menu, then select all applications  to show a list of apps
- 2) Right-click the application you want to add to the start menu and then fix it to Start Menu

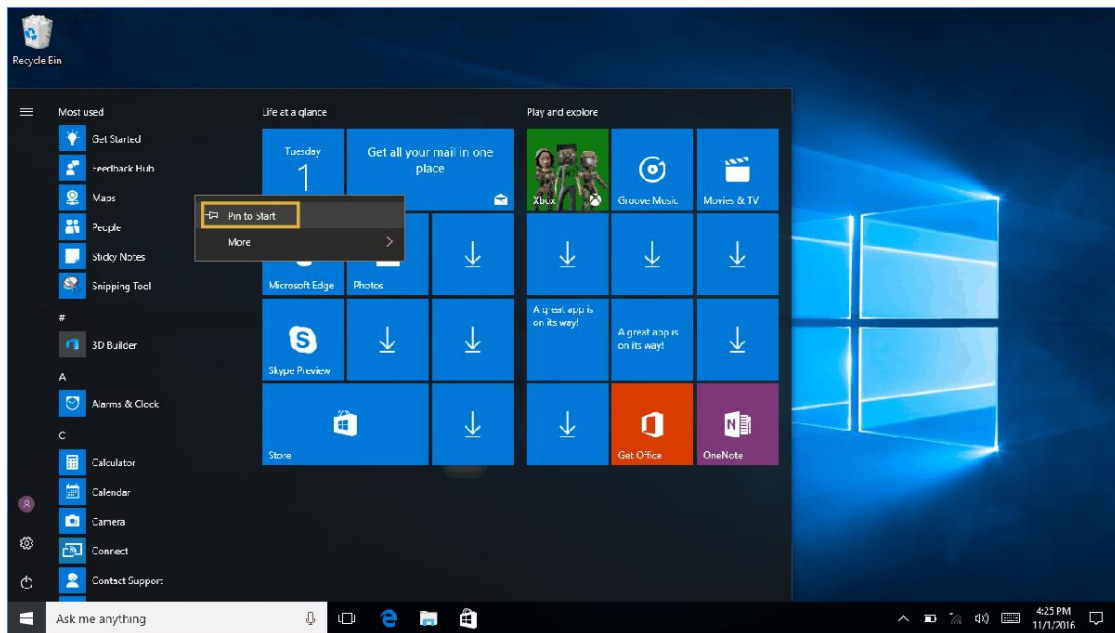

Note: You can also drag the application from the most used or all apps column to add them to the Start menu

2.3 Put the computer to sleep mode or switch off

when you finish using your computer, put the computer to sleep mode or switch off

- **Put the computer to sleep mode**

If you don't use your computer for a short time, you can put it to sleep mode

When the computer is asleep, you can skip the startup procedure and quickly wake up the computer.

To put the computer to sleep, do one of the following:

- Close the display screen
- Press the power switch
- Open the Start menu and select Power  → sleep

Note: Wait for the power light to start flashing (indicating that the computer is asleep) before moving the computer. Moving the computer while the hard drive is being read or written may damage the hard drive and cause data loss.

To wake up the computer, do one of the following:


- Press the space bar on your keyboard

- Turn off the computer


If you will not use the computer for a long time, turn it off. To turn it off, do one of the following::

- Open the Start menu and select Power  → off

€-bayfan HZ百分®

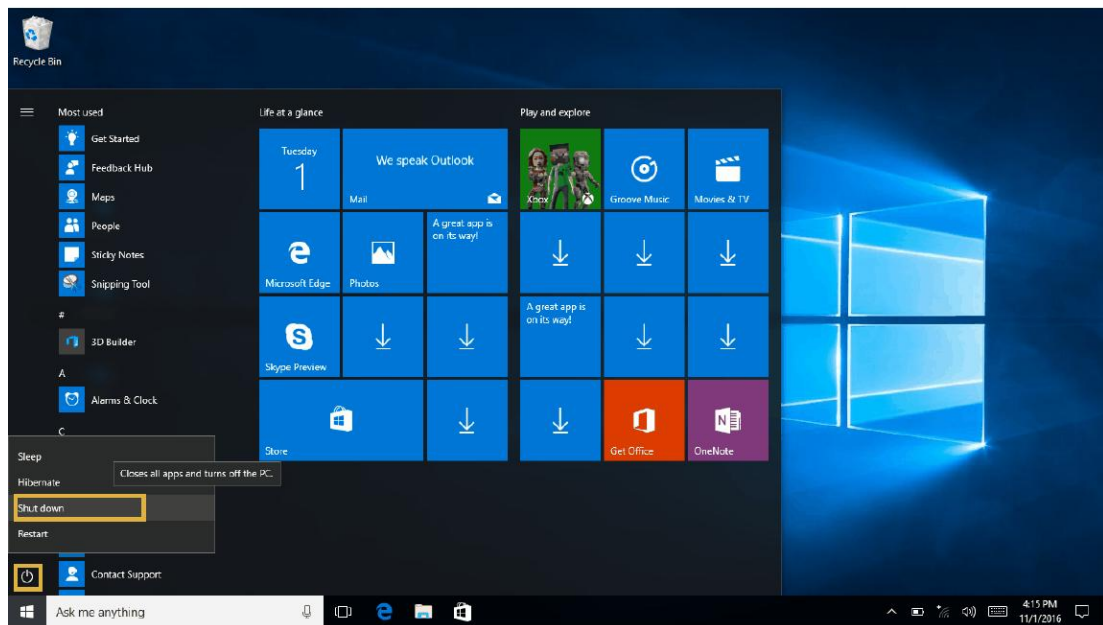

- Right-click the Start button in the lower-left corner and select turn off or Sign Out

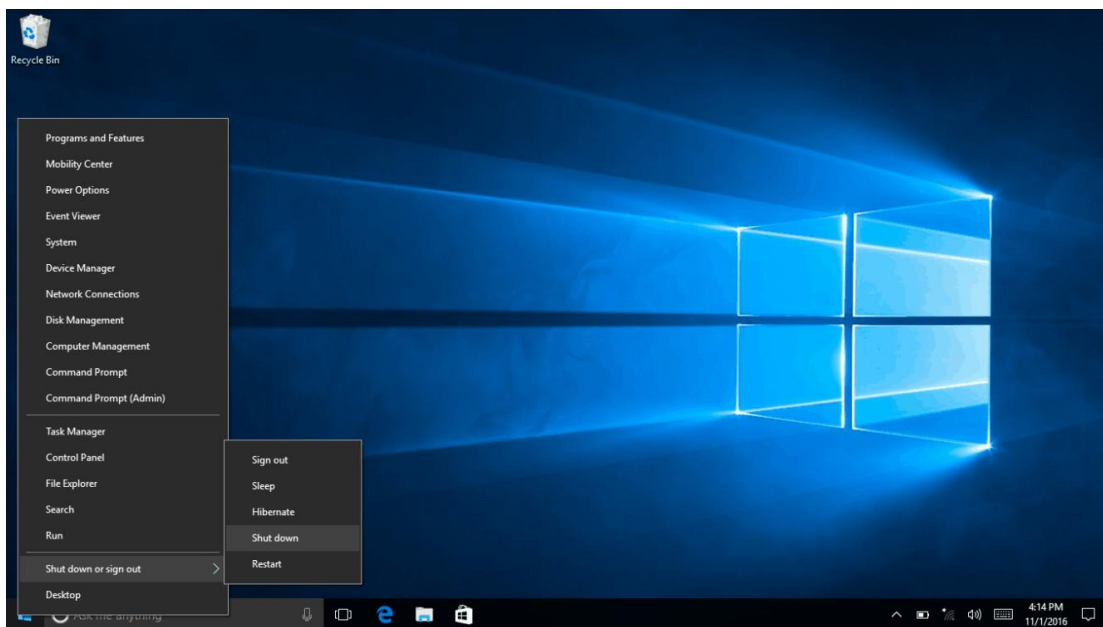


2.4 Task and desktop management

- Task view

To open Task View, do one of the following:

- Select the task view button on the taskbar  .

- Press the Windows logo key  + Tab key.

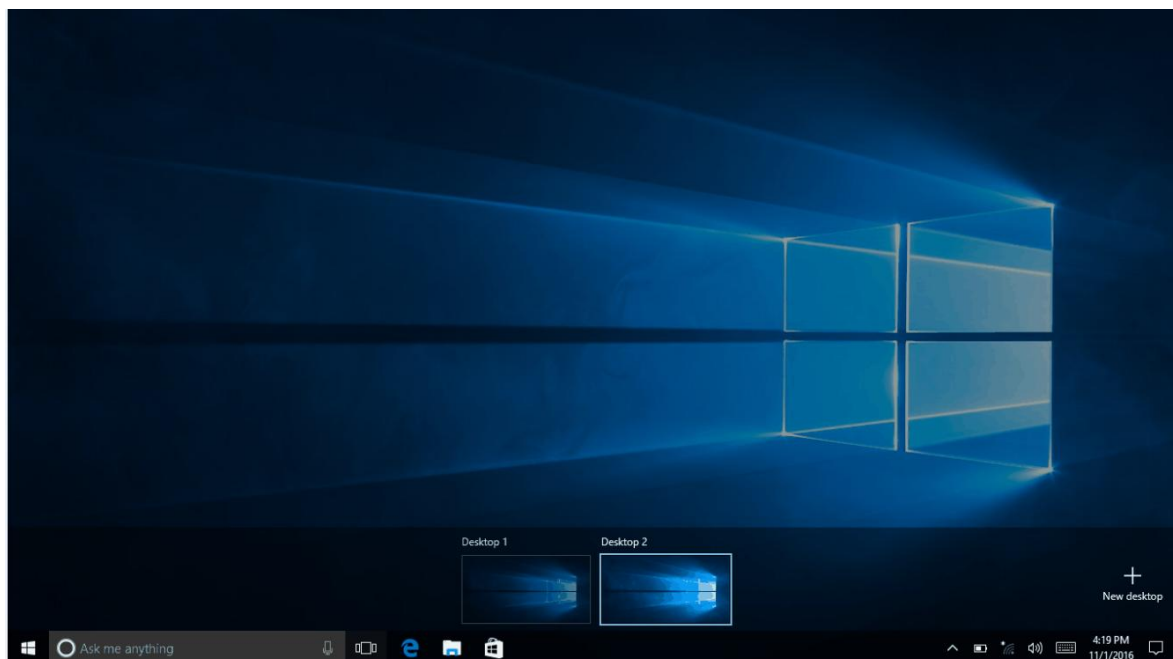

• Virtual desktop management

Windows 10 has the ability to create, manage, and switch virtual desktops. To create a new virtual desktop, do one of the following:

- Open the task view and select new desktop

- Press the Windows logo key  + Ctrl key + D key.

To switch between different desktops, do one of the following:

- Open the task view and select the desktop you want to activate

- Press the Windows logo key  + Ctrl key + ← / → key, Switch between desktops that you create

2.5 Connect to a wireless network

To enable wireless functionality: Do the following:


- 1) Press FN+F12 () Turn off airplane mode

- 2) Click the lower-right corner of the taskbar, open the network configuration page 

Connect to a wireless network

When the wireless feature is enabled, the computer automatically scans for available wireless networks and displays them in the list of wireless networks. To connect to a wireless network, tap its network name in the list, and then tap Connect.

Note: Some networks require you to enter a network security key or password before you can connect. To connect to such a network, ask your network administrator or Internet service provider for a network security key or password.

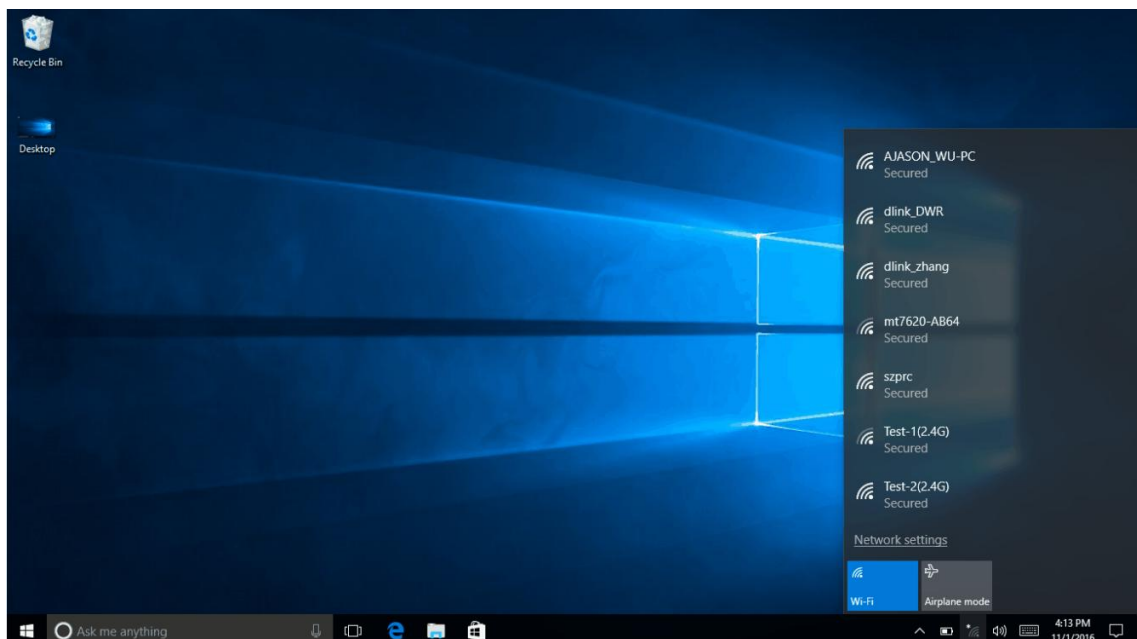

2.6 Getting started application

Windows 10 also provides a getting started application that demonstrates the new features of Windows 10. You can find it in the start menu. To open the Getting Started application, do one of the following:

- Open the Start menu and select Get Started .



3. 0 Basic use of common sense

3.1 Battery status indicator

Observe the charging status according to the battery progress bar at the bottom right of the screen, and the progress bar shows full when fully charged.

3.2 Stop the computer

When you finish your work, you can power off your computer or put it into standby or sleep mode

Stop mode	Method	Power on again or using method
Turn off the power directly	Follow the shutdown procedure for your operating system. In this way, the loss of data or damage to the software can be avoided. In case the system freezes due to hardware or software issues, use the power button to shut down	Use the power switch
Standby	Depending on your Windows settings, enter standby as follows: A, Close your computer B, Use the power switch	Use the power switch
Sleep mode	Depending on your Windows settings, enter standby as follows: A, Close your computer B, Use the power switch	Use the power switch

3.3 Keyboard features

Function keys	Feature implementation	Function keys	Feature implementation
Fn+ESC	Turn on/off touch board	Fn+F7	Increased screen brightness
Fn+	Enter to sleep mode	Fn+F8	Previous song
Fn+F2	Turn off the volume	Fn+F9	Next song
Fn+F3	Lower the speaker volume	Fn+PAUSE	Pause or play the song
Fn+F4	Turn up the speaker volume	Fn+INSERT	Open the settings panel
Fn+F5	Turn on the keyboard backlight		
Fn+F6	Increased screen brightness		



3.4 Touch board

The built-in touch board is a PS/2 compatible positioning device whose surface feels moving. Just move your finger over the touch board surface and the cursor will follow

3.5 Display screen

For your comfort, your laptop has an LED LCD screen. It supports high resolution and real color features, brings you extraordinary visual shock.

Follow these guidelines to extend the life of your display screen:

- Set the screen brightness to the lowest brightness suitable for viewing
- Do not turn off the option to enter pause mode in power management.
- When using it on a desk, if there is an external monitor, use the external monitor and turn off the laptop display screen
- If you don't have an external monitor, switch to pause mode when not in use

【Note】 To extend your battery life, minimize the brightness when suitable for viewing condition, so that the internal light source can use less power.

3.6 Network card

When using, please set the wireless network according to the prompts of the operating system

(Tip: It takes some time for your computer to connect to the wireless network)

4.0 BIOS (Basic Input Output System) settings

In this chapter, we will teach you how to enter the BIOS setup program and set various hardware control options, and you will also learn how to use the built-in security settings.

[Setting Utility] is a hardware status program built into the BIOS (Basic Input Output System) of a laptop. It can perform and maintain many hardware functions. It is a software that operates in a menu mode that allows you to easily set and change setpoints.

The BIOS contains factory presets for laptops. However, there is still a chance that you will need to modify the preset values in the BIOS. You may need to start the BIOS setup program when there are hardware changes, such as upgrades, temporary conditions, or when you decide you want to customize the hardware settings to meet specific needs.

BIOS allows you to set a password to restrict user access. This is an important feature because laptops today have a lot of stuff. Unauthorized access is preventable.

4.1 What is the BIOS Setup procedure

BIOS Setup is ROM-based software that transfers basic computer information, providing a variety of options for boot device preferences, security, hardware mode, and more.

4.2 Use the BIOS Setup method

The situations in which you must perform BIOS settings are:

- You need to restore the default values.
- The boot test found a problem, and a message appeared on the screen asking you to perform BIOS settings.
- You need to change the setting value for specific hardware.
- You need to change the setting values for optimal system performance.
- To perform BIOS settings, press the shortcut key F2 or Del when the computer is turned on.

5.0 Driver Installation

This laptop supports Windows 10 64-bit systems.

Open the included CD and run the driver installation, as shown in the figure:

(Attention: The following are schematic diagrams, please refer to the actual product)



(WIN10 Driver Installation Screen)

Click the corresponding icon in the image and follow the prompts to complete the installation.

6.0 Attentions

6.1 Special Notice

In order to facilitate understanding and attract your attention, when it comes to product safety or information that requires attention, we will remind you in this section or later sections according to the following levels and special warning terms, and these special warnings are expressed as follows:

【Danger】 -- Indicates vigilance against high danger

【Warning】 -- Indicates caution for moderate danger

【Attention】 -- Indicates concern for mild danger

【Prohibited】 -- Indicates that dangerous operations need to be prohibited

【Reminder】 -- Indicates safety or other content that needs attention

The safety information provided to you in this section is not exhaustive, for your safety and interests, we will arrange some product safety information into the sections that follow the manual as needed, no matter where this safety information is placed, you should read it carefully.

Similarly, in addition to the precautions given in special cautionary language, you should pay equal attention to other contents and descriptions in the manual.

6.2 Important tips for laptop use, be sure to read

Laptops are high-tech precision products, so be sure to read the tips below carefully.

1) LCD screen maintenance:

- Do not place any heavy objects on the laptop;
- When using a suitcase or backpack, make sure you don't pack too much stuff inside the bag and don't add extra pressure on the back of the laptop bag and LCD screen;
- Do not grasp, twist or hit the surface of the LCD screen;
- Do not place the LCD screen in an environment where the temperature exceeds 40°C or the humidity is greater than 90%;
- Do not expose the LCD screen to direct sunlight or strong fluorescence;
- Do not place anything between the LCD screen and the keyboard, such as: pencils, documents, etc., which will damage or scratch the LCD screen;
- Do not use aggressive cleaners to wipe the LCD screen, which will damage the screen.

2) To prevent the computer from overheating, please make sure that the heat dissipation vents are not blocked during computer work.

3) Do not remove media such as floppy drives, optical drives, removable storage, etc. while the system is accessing them, otherwise it may cause system crash or data corruption.

- 4) Please do not disassemble the case while the system is working, which will cause data loss or damage; Formatting the hard disk will delete all the data on the hard disk, please make a backup in advance; Please be sure to back up important data in other storage media in time, and our company will not be responsible for the loss of data caused by this.
- 5) Safe use of power supply
 - To ensure your safety, please ensure that the power supply has been properly grounded when using an external power supply.
 -
 - The power supply in the location needs to be stable and undisturbed, if you are not sure about the local electrical specifications, please contact your dealer or local power company.
 - For safety reasons, please do not destroy the grounding wire of the power plug.
 - When unplugging the power supply, avoid pulling the wire out directly, and be sure to unplug it from the plug to ensure safety.
 - Before cleaning your computer, remember to unplug and remove the battery.
 - Do not disassemble the power adapter casually.
 - Do not use the power adapter not brought with the laptop, this may cause damage to the computer, and the company will not be liable for the damage caused to the computer.
- 6) To avoid damage to the computer, do not reach the laptop with one hand.
- 7) This product can only be disassembled and assembled by the authorized service personnel of the agency, please ensure that the seal is complete, otherwise it may affect your enjoyment of warranty or "three guarantees" service.
- 8) If you set a password, please remember it, otherwise it may not turn on the computer. If you forget your password, contact the supplier or an authorized repair station, but this may damage all your data.

6.3 Attentions

1) Applicable groups

【Attention】 The use of computers, should have a certain basic knowledge of computers, at the same time, computers are not suitable for children to operate alone, if necessary, must be supervised by adults.

2) Working environment

【Danger】 In order to avoid unexpected failures, the computer should work within the following limited environment::

Content	Adaptation range	Remark
Storage and transportation temperature	-20℃ 至 50℃	

Storage and transportation relative humidity	20% - 93% (40°C)	
Atmospheric pressure	86kPa – 106kPa	
Power resiliency	100-240V,50/60Hz 1.5A	
Operating humidity	35% - 80%	
Operating temperature	10°C - 35°C	

【 WARNING 】 To avoid damage from external environments (moisture, dust, food, liquids exposed to direct sunlight, etc.), you should place your computer in a ventilated, dry place. To avoid magnetic field interference and damage, please stay away from other home appliances (such as TV, air conditioners, etc.).

【 WARNING 】 Please do not splash liquid or other debris into the computer, otherwise it may cause electric shock or fire caused by short circuit of internal components.

【 ATTENTION 】 The computer is powered on and turned on without recovery under low temperature conditions, which may cause irreparable failure to the computer, so please ensure that the computer recovers at room temperature (10° C-35° C) for more than 2 hours before use.

3) Before use

【 WARNING 】 After the computer is stored and transported in an environment below 10 ° C, please leave it at room temperature (10 ° C-35 ° C) for more than 2 hours before use to avoid power damage caused by the computer temperature being too low. Do not unpack during this period, let the computer naturally restore the temperature, to avoid heating up too fast and power damage will occur.

【 ATTENTION 】 Before use, you need to confirm that the computer connection, power use and other matters meet the requirements of the manual.

4) Movement, transportation, storage

【 ATTENTION 】 When moving your computer, handle it with care.

【 ATTENTION 】 When transported, it should be placed in the original box, stacked according to the instructions of the packaging storage icon, and handled in a closed container.

【 ATTENTION 】 When stored, packaging materials should be safely stored out of the reach of children to avoid dangerous accidents.

According to the relevant explanations in the national standard (GB/T9813-2000), 《The General Specification for Microcomputers》, after the computer temperature is stored and transported in an environment below 10 ° C, please leave it at room temperature (10 ° C-35 ° C) for more than 2 hours before use to avoid damage caused by low computer temperature and power-on. During this period, please do not unpack the package, let the computer naturally restore the temperature, to avoid the occurrence of power damage caused by frost and condensation caused by the computer due to excessive heating.

5) Battery

【ATTENTION】 Improper replacement of the computer's lithium battery may cause explosion hazard, please be sure to install and replace the lithium battery under the guidance of professional maintenance personnel; Only replacement battery products of the same or equivalent type recommended by the manufacturer are permitted; Improper disposal of batteries will cause serious pollution to the environment, please be sure to properly dispose of the used batteries or return the waste batteries to the company's after-sales maintenance department for disposal to avoid environmental pollution.

6.4 Laptop battery usage instructions

Follow these rules to make good use of your battery.

- 1) New battery: The new battery needs to be used first, and the power will be exhausted before it can be charged.
- 2) Battery life: Improper use and maintenance may shorten battery life. To improve battery life and battery functionality, the battery is **completely discharged and recharged to saturation every 30 days**.
- 3) Battery meter:
 - There is a built-in meter in the battery, which can calculate the battery power. Battery meters rely on the battery's [memory] to determine how much to stop charging and discharging. But if you do [incomplete] charging or [incomplete] discharging frequently, the [memory] of the battery will be messed up.
 - Due to the characteristics of the battery itself, the power will gradually decrease during use, the use time will be shortened, and the battery may not be fully charged to 100% during the battery warranty period, but it will not affect normal use, which is normal.
- 4) Save battery power:
 - Advanced power management: Your laptop has advanced power management features that slow down the processor and peripheral parts. Using these features will help save power on the battery.
 - Brightness of LCD display: LCD display consumes a lot of power, so if you turn the brightness down, you can save electricity source.
 - Software and peripherals: Different software and peripherals, even if they are not programs and devices in use, consume power. To save battery energy, we recommend that you unplug unwanted peripherals from the computer connectors.

5) Q&A:

Q: How to fully discharge the battery?

A: Let the computer work on the battery's power until the battery shuts down automatically because the power is too low. Even if you see a low power message on the computer screen or hear a warning sound about

low power, you do not need to turn off the computer manually, let the computer continue to turn on until it has exhausted all the battery power and automatically shut down.

Q: How to fully charge?

A: When charging the battery, it is generally necessary to wait until the battery display light on the computer shows that it has been fully charged, please refer to the power status indicator of this manual for details.

Q: How to maintain the battery?

A: At least every 30 days or 20 [incomplete] discharges, a complete charge and discharge action is performed.

6) Pay special attention:

- This battery can only be used in this laptop.
- There may be a risk of explosion if the inappropriate battery type is replaced. Only original batteries of the same model or batteries of the same grade recommended by the original manufacturer can be used for replacement.
- Do not disassemble the battery.
- Do not expose the battery to flame or water.
- To prevent fire, combustion or damage to the battery, do not allow metal objects to touch the poles of the battery.
- Use caution when handling damaged or leaking batteries. If you accidentally touch the battery fluid, rinse with soap and water as soon as possible. In case of contact with eyes, rinse your eyes with water for 15 minutes and go to the hospital as soon as possible.
- If the ambient temperature is too high, do not charge.
- Do not expose the battery to high temperatures when storing.

7) Power:

【DANGER】

You need to use qualified three-core power plugs and sockets with grounding protection, and the power plug should eventually be plugged into a well-grounded power supply, and good grounding is an important guarantee for the normal operation of your computer. If you replace the standard power cord without permission, there may be serious consequences, and the maximum length of the power cord should not exceed 4.5 meters.

Before you use the power supply, you should follow the instructions of the power plug and socket to confirm that the power supply meets the requirements for computer use, otherwise, it may bring serious consequences.

【DANGER】

During a thunderstorm, using a laptop may cause damage to the computer and even your personal and other property. Therefore, in thunderstorms, do not use computers, and disconnect telephone lines, network cables, power cords and other conductors that may be connected to the outside world. Do not plug and unplug these cables when thundering.。

【ATTENTION】



Double-check the supplied AC power cord. If you have problems, contact the relevant vendor.

Power cords for laptops must comply with the following safety specifications:

- The power plug should eventually be plugged into a well-grounded power supply

The power plug must comply with GB/T 2099.1-2021, GB/T 1002-2021

8) Ergonomics

【REMINDER】 When working or playing on a computer, adjust your environment and set up your computer equipment so that your body is comfortable and flexible. The following suggestions can help you achieve a more comfortable environment.

- Support your back:
 - ✓ Choose a chair that supports the lower part of the back.
 - ✓ Adjust the height of the working surface and chair to give it a comfortable and natural posture.
- Promotes a comfortable leg posture:
 - ✓ Clean up items under the table to make leg position and movement more comfortable.
 - ✓ If your feet cannot rest comfortably on the floor, use a footstool.
- Reduce neck flexion and twisting:
 - ✓ Place the LCD in the middle of your front. If you view a document more often than the display, consider placing the document directly in front of you and moving the display slightly to the side.
 - ✓ Consider using a document rack to place documents close to eye level.
 - ✓ Place the top of the screen close to eye level. People with astigmatism may need to lower their screen a little or discuss glasses suitable for computer work with a qualified health professional.
- Reduce physical fatigue:
 - ✓ Place the display arm-length distance and sit comfortably in front of the display.
 - ✓ Avoid glare. The display should be placed away from light sources that produce glare, or use curtains to control light intensity.
 - ✓ Please clean the screen from time to time.
 - ✓ Please adjust the brightness, contrast and font size of the display to a comfortable state.
 - ✓ When operating the keyboard and touchpad, please touch the keys lightly, keep your hands and fingers relaxed, and tap the keyboard with less force.
 - ✓ When clicking the touchpad or using a joystick or other game controller, also use less force to touch the keys.
 - ✓ Avoid resting your palms or wrists on surfaces at large angles when typing, and rest your palms during breaks between typing if necessary.

- ✓ When not typing, relax your arms and hands. Do not rest on the edge of an object, such as the edge of a table.
- ✓ Adjust your chair so that the seat does not squeeze behind your knees.

6.5 Safety Instructions

- 1) The hole of the battery socket should be installed close to the device or in a place that can be easily operated, when plugging and unplugging the power cord, avoid directly pulling the wire out, be sure to pull it out from the plug to ensure safety and prevent electric shock. Do not disassemble the power adapter.
- 2) Do not store this product near water.
- 3) When installing, please place this product on a stable support to avoid serious damage caused by falling due to unstable placement.
- 4) Do not place the wires of this product in a crowded place to avoid stepping on the wires. Do not place anything on the wire.
- 5) Follow all warning messages and logos on the product.
- 6) If you do not intend to use this product for a long time, please unplug the power plug to avoid damage caused by short-term voltage excess.
- 7) Do not spill any liquid on this product, as this may cause the risk of fire or electric shock.
- 8) In the following cases, please refer the service to a qualified professional.
 - The power cord or plug is damaged or worn;
 - Spill liquid on this product;
 - This product has been subjected to rain or water splashing;
 - You have followed the instructions for operation and the product still does not work properly;
 - This product has been dropped or the case has been damaged;
 - This product has shown obvious damage.
- 9) Please refer to Appendix A product specifications for the use and storage temperature of this product, and use and storage outside the specified temperature range may cause permanent damage to this product.
- 10) Do not use the power adapter near water or other liquids. Do not spill liquid on the power adapter.

Note: All pictures in this manual are schematic diagrams, for reference only, and the specific reference is subject to the actual product.

7.0 Fault analysis and treatment

- In this chapter, you will learn how to solve general hardware and software problems.
- Your laptop is fully tested and meets the specifications of the system before shipping. However, incorrect operation or negligence during delivery can lead to problems.
- This chapter will provide reference and identification information for general hardware and software problems that you may encounter.
- When you encounter a problem, you can try to deal with it by following the instructions in this chapter first. If the error condition persists, please contact your dealer for service information.

7.1 Problems with sound

1) No sound

- Double-click the speaker icon in the lower right corner of the taskbar to see if the speaker volume has been turned off.
- Press FN+F4 to increase the volume.
- Most sound problems are software-related. If the sound of your laptop before was normal, the likely reason is that, soft are set up incorrectly.

7.2 Problems with the hard disk

1) The hard drive is not working or is not recognized

- If you have just upgraded the hard disk, please make sure that the connector of the hard disk is loose and whether the hard disk is completely inserted. You can unplug the connector, firmly reinsert it, and then turn the system back on.
- The new hard drive needs to be partitioned and reformatted. The operating system and drivers also need to be reinstalled.
- Please check the hard drive indicator. When you access files, the hard drive light should flash intermittently.
- The new hard drive may be bad.
- If your laptop has ever suffered static electricity or a shock, you may have damaged your hard drive.

7.3 Problems with the monitor

1) When the system boots, the screen is black

- Make sure the laptop is not in [Hibernate] or [Wait] mode. In these modes, the display is turned off to save power.
- Please press the function key FN+F7 to increase the brightness of the screen.

2) Screen flickering

It is normal to see the screen flicker several times when you turn it on or off.

3) Screen dead pixels

Due to the limitations of the LCD screen manufacturing process, there are usually some like dots on the LCD screen that cannot display certain colors normally (that is, the commonly known dead pixels), which is a normal phenomenon, please use it with confidence.

The following is the relevant content of the national standard

The test is performed under the following conditions:

- Ambient temperature: 20° C-25° C
- Humidity: 65+/-5%RH
- Lighting: 300 lx - 700 lx
- Visual distance: 35cm-40cm
- Visual angle: the line of sight is 90 degrees to the screen surface

7.4 Problems with memory

1) After you replace the memory, POST does not show a change in memory capacity when POST

- Memory modules may not be installed correctly
- The memory module is failure
- Your system may not be compatible with some memory sticks
- The laptop may not support large memory modules

2) The operating system appears insufficient memory information prompt in use

- This is usually a software or operating system related issue. Contact your local software or operating system reseller for resolution.

7.5 Sleep problems

- 1) The computer shuts down immediately after the error message that the battery is critically lowLow battery, connect the AC power adapter to the computer
 - Low battery, connect the AC power adapter to the computer

- 2) When the computer enters sleep mode immediately after the "POST" POST,
 - Operating temperature within acceptable range.
 - Please refer to "Section 6.3—[Working Environment]" of this user manual, Safety and General Information Guide.
- 3) Please refer to "Section 6.3—[Working Environment]" of this user manual, Safety and General Information Guide.
 - If the computer is in sleep mode, connect the AC power adapter to the computer and press any key or power button.
 - If the system still fails to return from sleep mode, stops responding, or cannot shut down the computer, reset the computer, but data that has not been saved may be lost.
 - To reset your computer, press and hold the power button for 4 seconds or more. If the computer still does not reset, unplug the AC power adapter.

8.0Special Notice

This laptop can support a variety of peripheral hardware such as mouse, keyboard, printer, scanner. The company guarantees the compatibility and reliability of the peripheral equipment that is included with the product, and the user shall use it correctly in accordance with the contents of the instruction manual attached to the product. If the consumer purchases a third-party peripheral device to connect to this laptop, please follow the instruction manual of the device to properly connect the peripheral and computer and install the appropriate driver under the operating system that supports the device. Since there are many peripheral equipment manufacturers in the market, in order to ensure the interests of consumers, the company recommends that consumers buy products from well-known manufacturers with quality assurance. If there is a compatibility problem between the third-party peripheral device and the laptop, please contact the third-party manufacturer.

The Company warrants the functionality and compatibility of the software provided with the Notebook (all software installed randomly is provided free of charge to the User). Please refer to the random user manual to use the software correctly. In addition, there are now a variety of software on the market, unless the software has special requirements, most of the genuine software can run normally on this laptop. In order to ensure the interests of consumers, users are requested to purchase genuine software from formal channels. For third-party software purchased and installed by the user, please follow the instructions provided with the software to operate correctly. If there is a compatibility problem between the third-party software and this laptop, please contact the third-party manufacturer.

It is recommended that users can find third-party manufacturers or distributors before purchasing third-party hardware products or software before purchasing them to protect your rights. The Company does not guarantee that the customer will be returned or exchanged due to third-party hardware products or software problems. We can provide technical support.



Appendix A Product Specifications

CPU: AMD Ryzen 3 5400U

System memory

On board LPDDR3-1600 DRAM 4GB

Memory

Dynamic memory allocation technology

screen

15.6" 16:9 eDP 1920*1080

Graphics

Integrated graphics

network card

WIFI 5374Mbps, Bluetooth 5.2

stockpile

SSD 256GB

power supply

AC100-240V,50/60Hz 1.5A

battery

Lithium battery, 60.42Wh

size

About 357*228.5*16 .8mm

weight

Approx. 1.9kg (including battery)

Note: Due to the rapid update of notebook product configuration, product specifications are subject to change without notice, and the machine configuration purchased by the user shall prevail

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.ct.

The device has been evaluated to meet general RF exposure requirement.

The RY-LC-MB(R3000)CPU(5400 U)MC(8G)HD(512G)SP(156)MT(AL6063T6)SL(358)SW(228)SH(18) has been tested for body-worn Specific Absorption Rate (SAR) compliance. The FCC has established detailed SAR requirements and has established that these requirements. This model meets the applicable government requirements for exposure to radio frequency waves. The highest reported SAR level for usage near the body (0mm) is 0.440 W/kg, and for the simultaneous transmission is 0.841W/kg.