




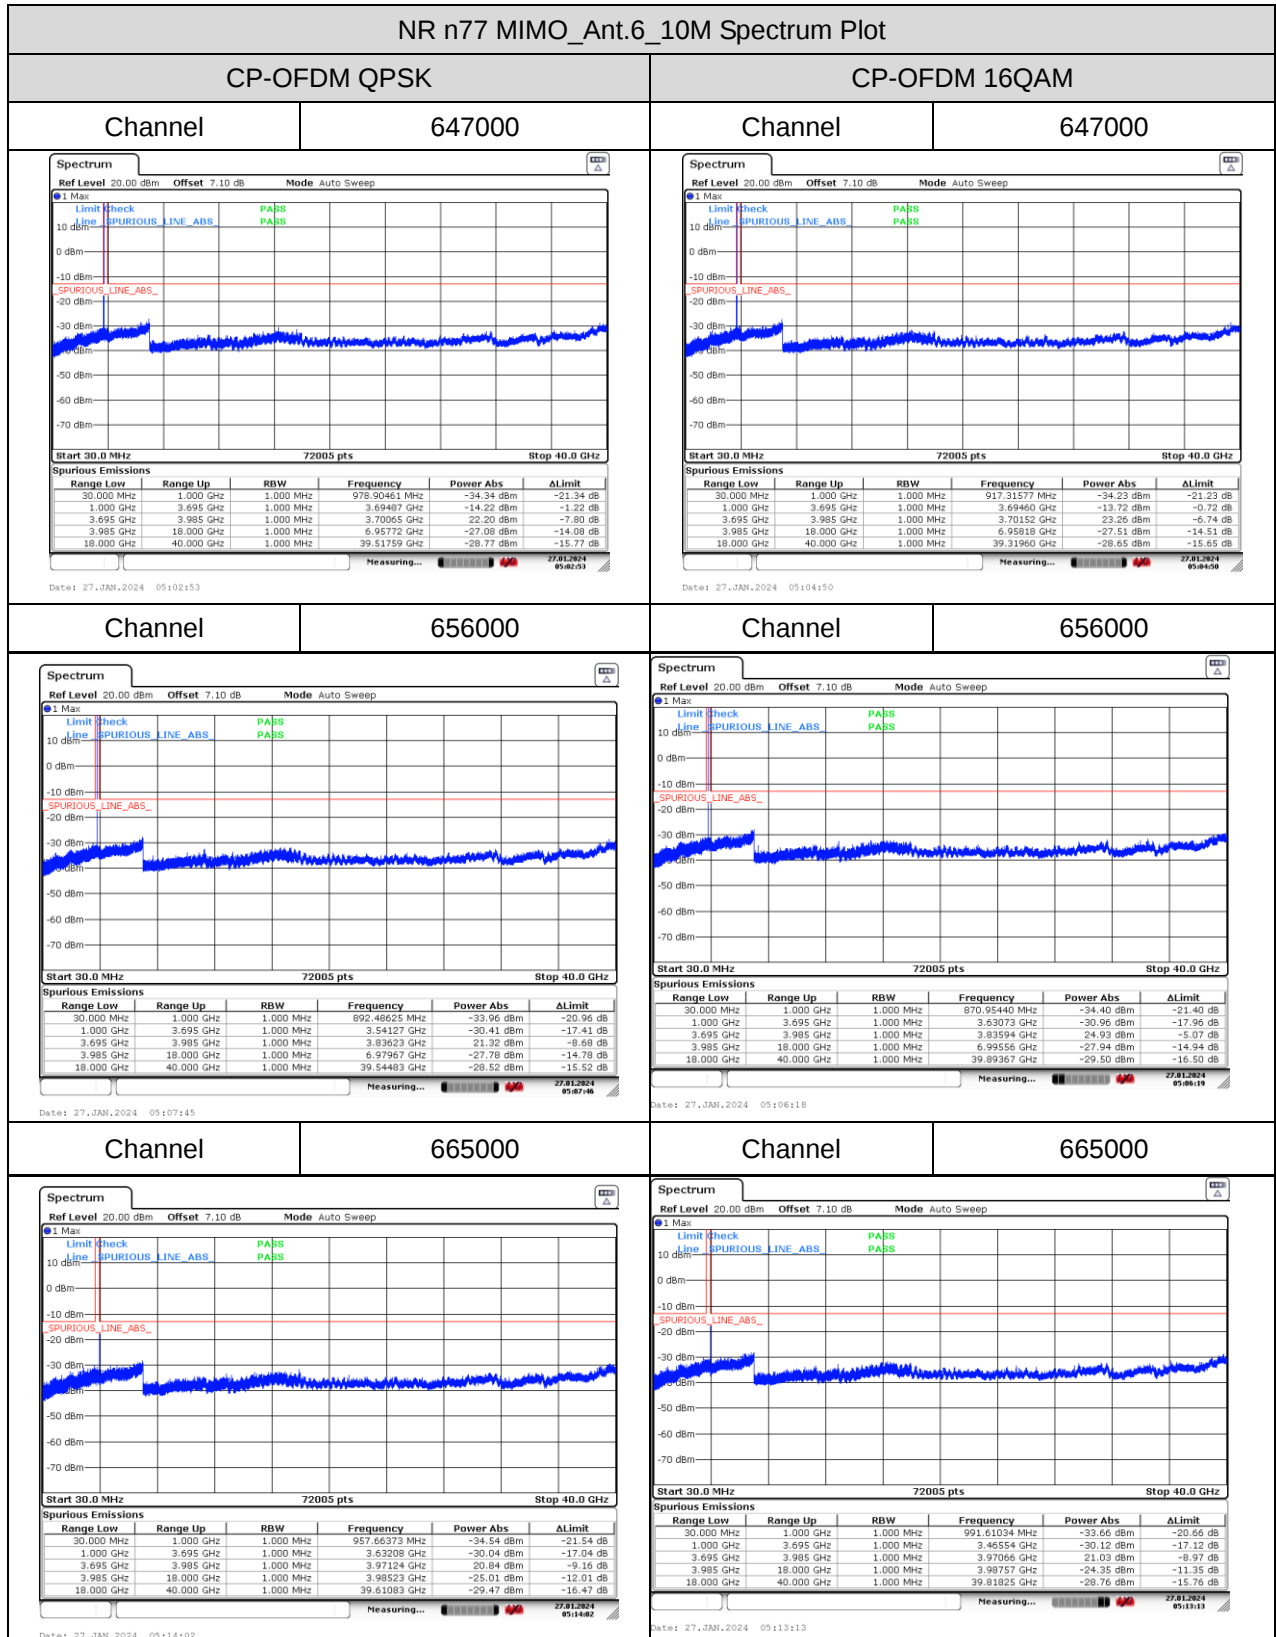

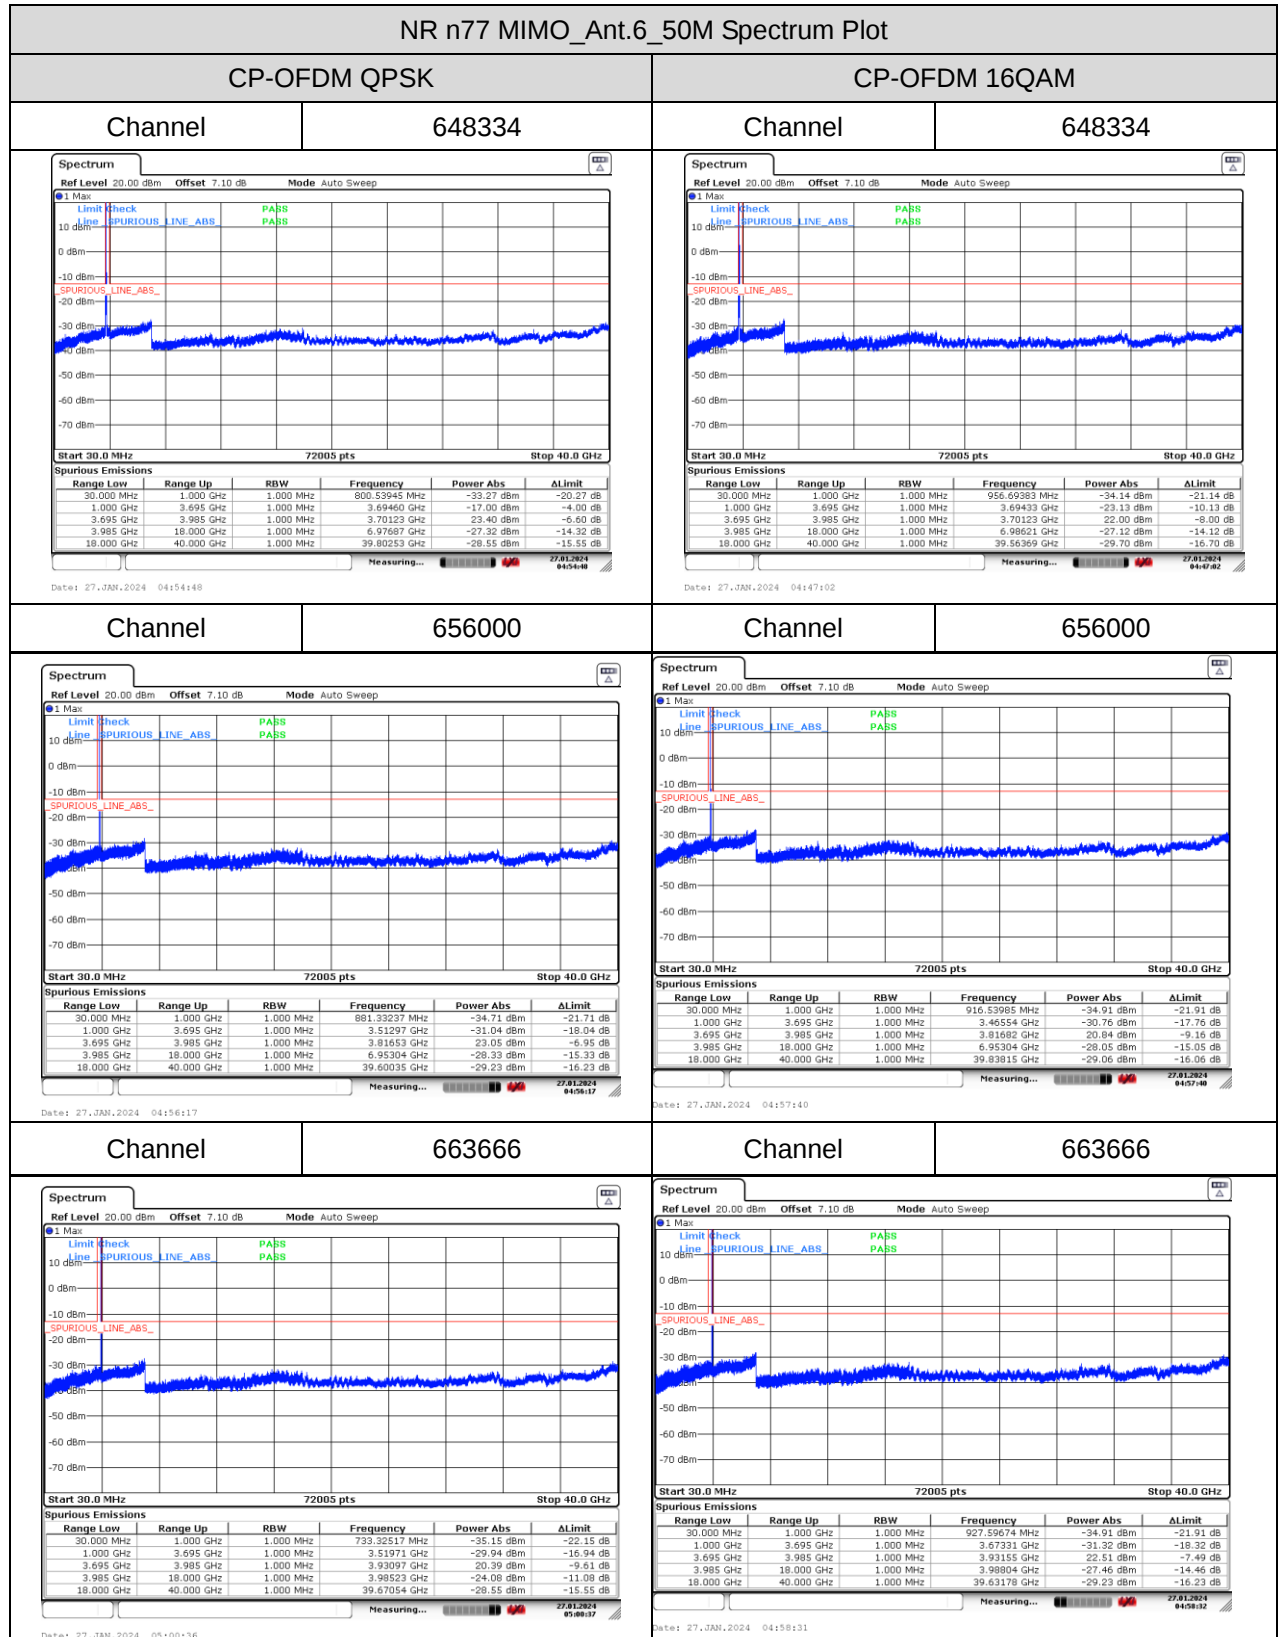


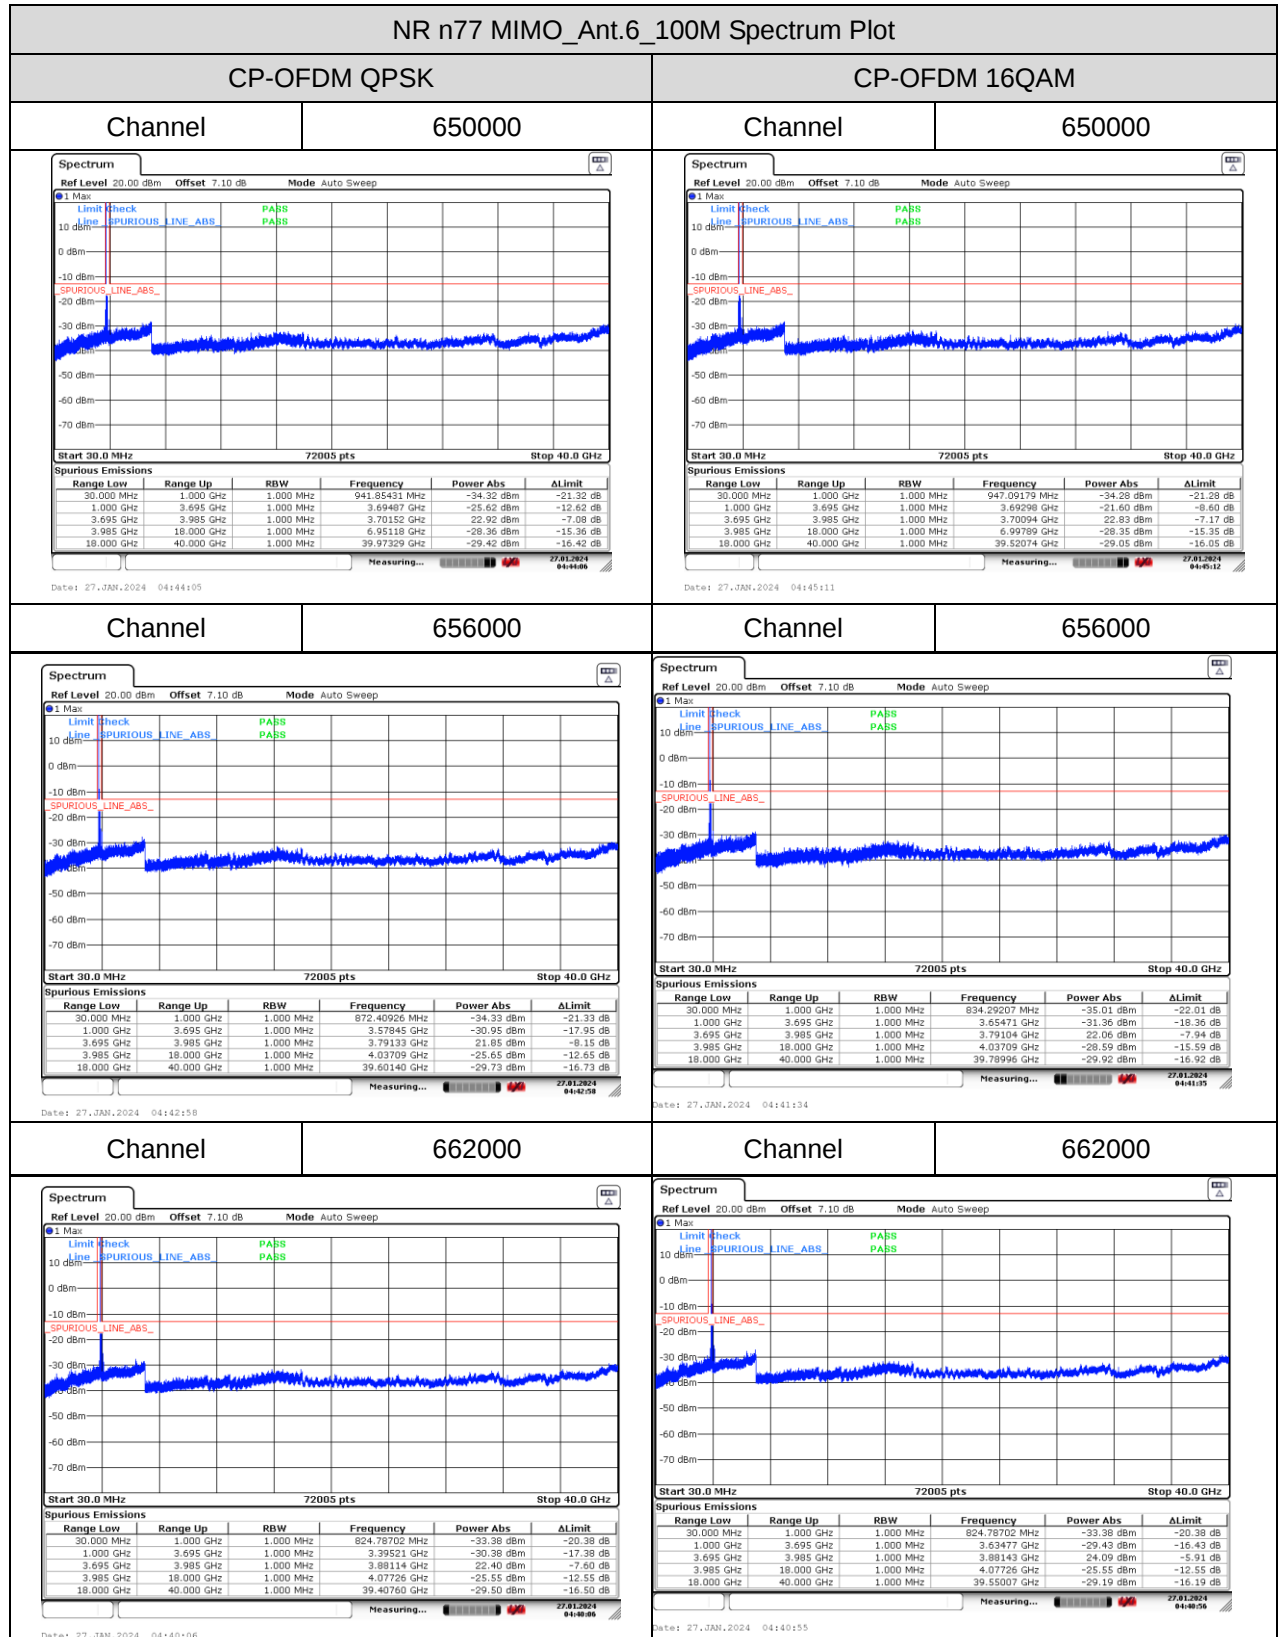

APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)

Test Mode : TX Mode


Ant 0°

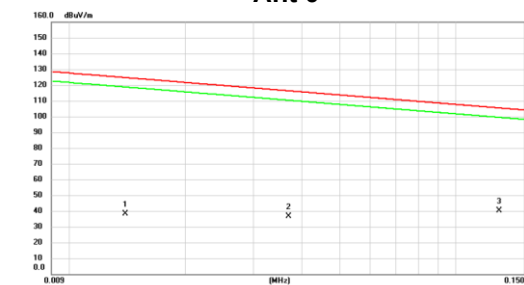

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.0140	17.02	21.03	38.05	124.88	-86.63	AVG	
2	0.0370	16.73	20.01	36.74	116.24	-79.50	AVG	
3 *	0.1291	20.13	20.16	40.29	105.39	-65.10	AVG	

Test Mode : TX Mode


Ant 0°

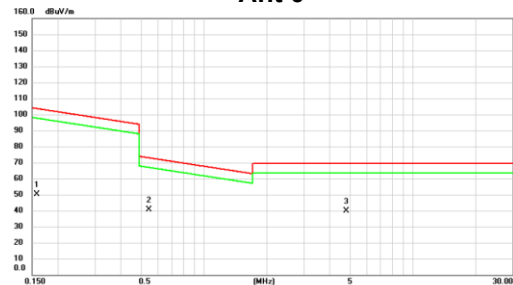

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1582	30.02	20.12	50.14	103.62	-53.48	AVG	
2	0.5484	20.61	20.04	40.65	72.85	-32.20	QP	
3 *	4.8066	19.43	20.20	39.63	69.54	-29.91	QP	

Test Mode : TX Mode


Ant 90°

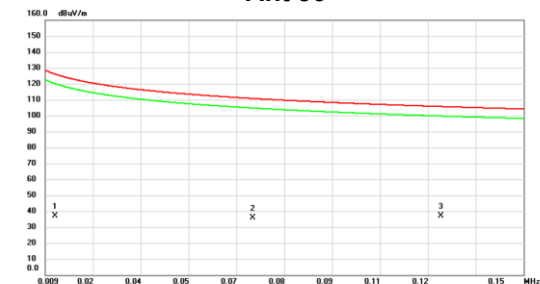

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.0120	15.98	21.16	37.14	126.02	-88.88	AVG	
2	0.0701	15.54	20.09	35.63	110.89	-75.06	AVG	
3 *	0.1256	16.93	20.16	37.09	105.63	-68.54	AVG	

Test Mode : TX Mode

Ant 90°

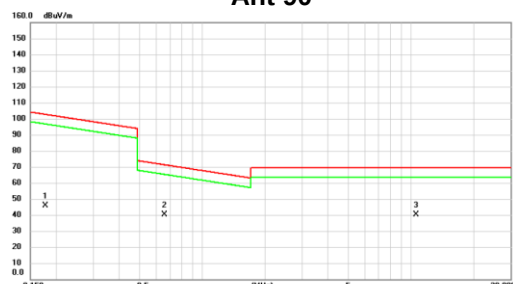


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1777	25.74	20.10	45.84	102.61	-56.77	AVG	
2	0.6574	20.07	20.04	40.11	71.25	-31.14	QP	
3 *	10.5677	19.48	20.61	40.09	69.54	-29.45	QP	

APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1GHZ)

Test Mode : NR n77_TX CH656000_10M

Vertical

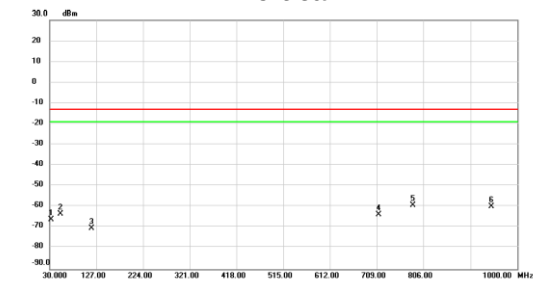

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	32.9100	-64.53	-1.49	-66.02	-13.00	-53.02	peak	
2	52.7950	-63.13	-0.32	-63.45	-13.00	-50.45	peak	
3	117.7850	-67.81	-2.62	-70.43	-13.00	-57.43	peak	
4	712.8800	-73.22	9.41	-63.81	-13.00	-50.81	peak	
5 *	784.6600	-70.05	10.71	-59.34	-13.00	-46.34	peak	
6	945.6800	-71.89	12.03	-59.86	-13.00	-46.86	peak	

Test Mode : NR n77_TX CH656000_10M


Horizontal



No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	56.6750	-72.57	-0.54	-73.11	-13.00	-60.11	peak	
2	154.1600	-71.09	0.03	-71.06	-13.00	-58.06	peak	
3	171.6200	-69.20	-0.43	-69.63	-13.00	-56.63	peak	
4	673.1100	-72.81	8.66	-64.15	-13.00	-51.15	peak	
5	852.0750	-71.92	10.91	-61.01	-13.00	-48.01	peak	
6 *	919.9750	-71.62	11.73	-59.89	-13.00	-46.89	peak	

Test Mode : NR n77_TX CH656000_100M

Vertical

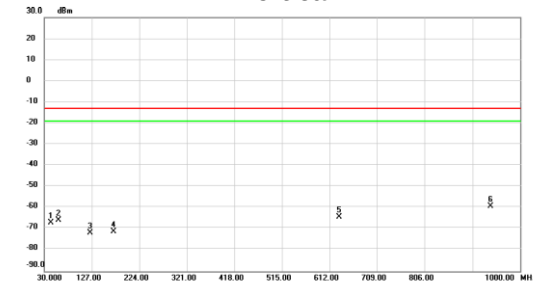

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	43.5800	-66.52	-0.49	-67.01	-13.00	-54.01	peak	
2	58.6150	-65.19	-0.72	-65.91	-13.00	-52.91	peak	
3	124.0900	-69.74	-2.04	-71.78	-13.00	-58.78	peak	
4	171.1350	-70.91	-0.37	-71.28	-13.00	-58.28	peak	
5	631.4000	-72.49	8.06	-64.43	-13.00	-51.43	peak	
6 *	939.3750	-71.33	11.96	-59.37	-13.00	-46.37	peak	

Test Mode : NR n77_TX CH656000_100M


Horizontal



No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	44.0650	-59.09	-0.44	-59.53	-13.00	-46.53	peak	
2	55.2200	-61.49	-0.41	-61.90	-13.00	-48.90	peak	
3	171.6200	-69.16	-0.43	-69.59	-13.00	-56.59	peak	
4	350.1000	-67.15	1.65	-65.50	-13.00	-52.50	peak	
5	782.7200	-72.03	10.70	-61.33	-13.00	-48.33	peak	
6	910.2750	-71.36	11.62	-59.74	-13.00	-46.74	peak	

Test Mode : NR n78_TX CH650000_10M


Vertical

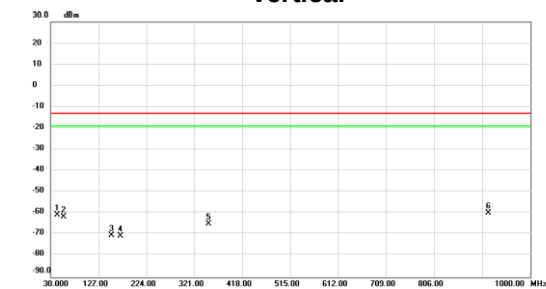

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1	44.0650	-60.33	-0.44	-60.77	-13.00	-47.77	peak	
2	56.6750	-61.20	-0.54	-61.74	-13.00	-48.74	peak	
3	153.6750	-70.27	0.04	-70.23	-13.00	-57.23	peak	
4	171.1350	-70.27	-0.37	-70.64	-13.00	-57.64	peak	
5	350.1000	-66.59	1.65	-64.94	-13.00	-51.94	peak	
6 *	915.6100	-71.60	11.68	-59.92	-13.00	-46.92	peak	

Test Mode : NR n78_TX CH650000_10M


Horizontal

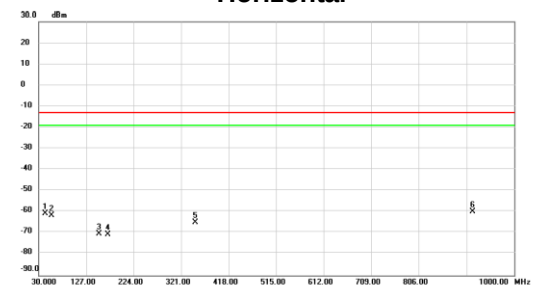

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1	44.0650	-60.33	-0.44	-60.77	-13.00	-47.77	peak	
2	56.6750	-61.20	-0.54	-61.74	-13.00	-48.74	peak	
3	153.6750	-70.27	0.04	-70.23	-13.00	-57.23	peak	
4	171.1350	-70.27	-0.37	-70.64	-13.00	-57.64	peak	
5	350.1000	-66.59	1.65	-64.94	-13.00	-51.94	peak	
6 *	915.6100	-71.60	11.68	-59.92	-13.00	-46.92	peak	

Test Mode : NR n78_TX CH650000_100M

Vertical

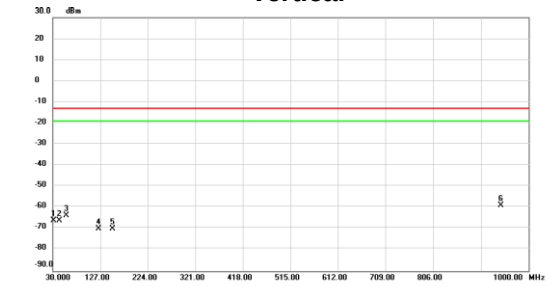

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1	31.9400	-64.66	-1.53	-66.19	-13.00	-53.19	peak	
2	44.0650	-65.80	-0.44	-66.24	-13.00	-53.24	peak	
3	58.1300	-62.98	-0.67	-63.65	-13.00	-50.65	peak	
4	123.6050	-68.04	-2.08	-70.12	-13.00	-57.12	peak	
5	152.7050	-70.12	0.04	-70.08	-13.00	-57.08	peak	
6 *	943.7400	-71.01	12.01	-59.00	-13.00	-46.00	peak	

Test Mode : NR n78_TX CH650000_100M


Horizontal



No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1	43.5800	-60.95	-0.49	-61.44	-13.00	-48.44	peak	
2	56.6750	-60.37	-0.54	-60.91	-13.00	-47.91	peak	
3	152.2200	-70.88	0.03	-70.85	-13.00	-57.85	peak	
4	350.1000	-68.57	1.65	-66.92	-13.00	-53.92	peak	
5	786.1150	-71.90	10.71	-61.19	-13.00	-48.19	peak	
6 *	962.6550	-71.88	12.12	-59.76	-13.00	-46.76	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M


Vertical

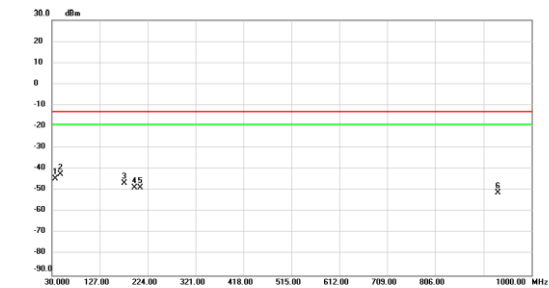

No. M.k.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	37.2750	-43.48	-1.15	-44.63	-13.00	-31.63	peak	
2 *	47.4600	-42.13	-0.29	-42.42	-13.00	-29.42	peak	
3	176.4700	-45.61	-0.98	-46.59	-13.00	-33.59	peak	
4	197.8100	-45.76	-3.01	-48.77	-13.00	-35.77	peak	
5	209.4500	-45.56	-3.30	-48.86	-13.00	-35.86	peak	
6	932.5850	-62.98	11.87	-51.11	-13.00	-38.11	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M


Horizontal

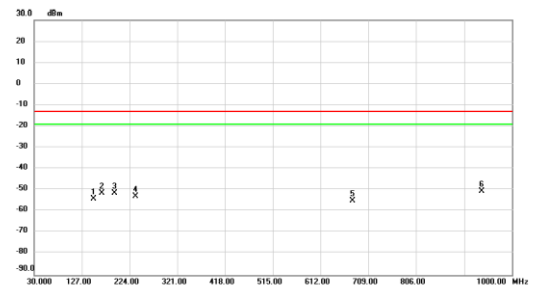

No. M.k.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	150.7650	-54.25	0.03	-54.22	-13.00	-41.22	peak	
2	167.2550	-51.22	-0.16	-51.38	-13.00	-38.38	peak	
3	192.9600	-48.82	-2.71	-51.53	-13.00	-38.53	peak	
4	236.6100	-51.03	-1.86	-52.89	-13.00	-39.89	peak	
5	676.9900	-63.87	8.72	-55.15	-13.00	-42.15	peak	
6 *	937.9200	-62.34	11.94	-50.40	-13.00	-37.40	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

Vertical

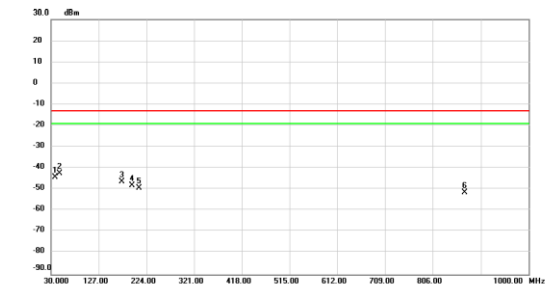

No. M.k.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	37.7600	-43.20	-1.09	-44.29	-13.00	-31.29	peak	
2 *	47.4600	-42.18	-0.29	-42.47	-13.00	-29.47	peak	
3	174.0450	-45.52	-0.69	-46.21	-13.00	-33.21	peak	
4	194.9000	-45.28	-2.83	-48.11	-13.00	-35.11	peak	
5	208.4800	-46.06	-3.28	-49.34	-13.00	-36.34	peak	
6	869.5350	-62.46	11.12	-51.34	-13.00	-38.34	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M


Horizontal



No. M.k.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	109.5400	-55.86	-3.42	-59.28	-13.00	-46.28	peak	
2	155.6150	-53.55	0.04	-53.51	-13.00	-40.51	peak	
3	179.8650	-51.58	-1.34	-52.92	-13.00	-39.92	peak	
4 *	194.4150	-46.80	-2.80	-49.60	-13.00	-36.60	peak	
5	233.2150	-52.57	-2.18	-54.75	-13.00	-41.75	peak	
6	801.1500	-63.70	10.77	-52.93	-13.00	-39.93	peak	


APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1GHZ)

Test Mode : NR n77_TX CH656000_10M

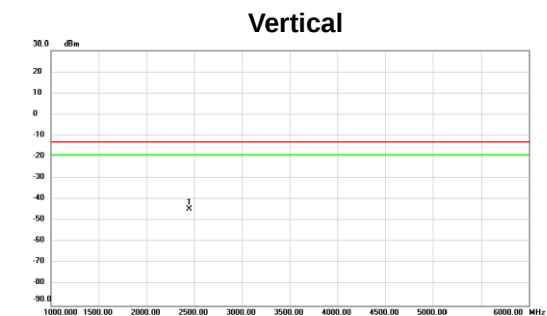


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	Factor	ment	dBm	dB	Detector	Comment
1	*	2452.500	-61.48	16.93	-44.55	-13.00	-31.55	peak	

Test Mode : NR n77_TX CH656000_10M

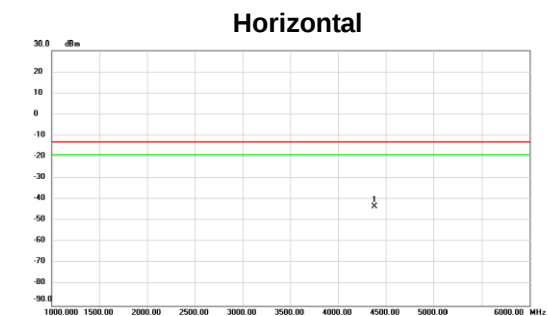


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	Factor	ment	dBm	dB	Detector	Comment
1	*	4380.000	-65.50	22.24	-43.26	-13.00	-30.26	peak	

Test Mode : NR n77_TX CH656000_10M

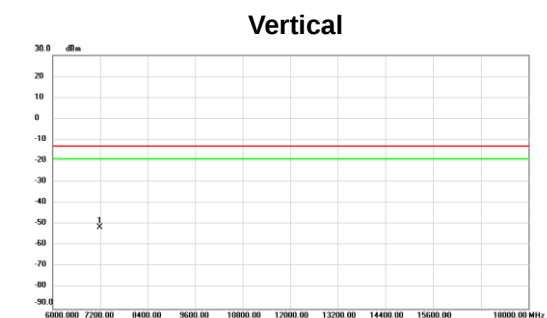

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	Factor	ment	dBm	dB	Detector	Comment
1	*	7188.000	-69.90	18.48	-51.42	-13.00	-38.42	peak	


Test Mode : NR n77_TX CH656000_10M

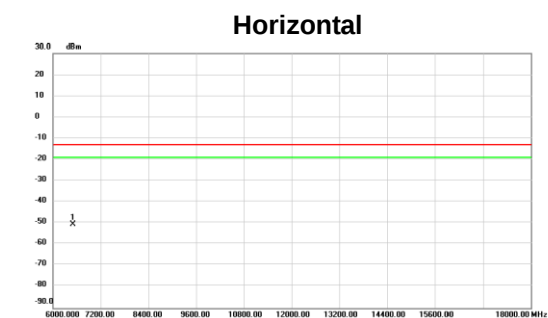

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	Factor	ment	dBm	dB	Detector	Comment
1	*	6504.000	-69.14	18.45	-50.69	-13.00	-37.69	peak	

Test Mode : NR n77_TX CH656000_10M


Vertical

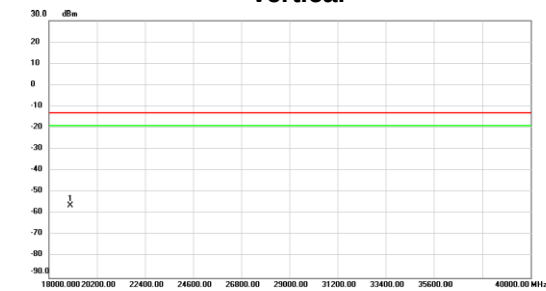

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	18972.40	-54.92	-1.30	-56.22	-13.00	-43.22	peak	

Test Mode : NR n77_TX CH656000_10M


Horizontal

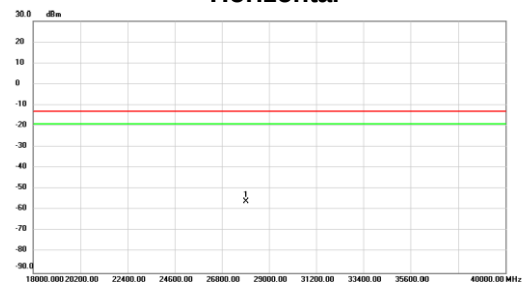

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	27915.40	-58.59	2.55	-56.04	-13.00	-43.04	peak	

Test Mode : NR n77_TX CH656000_100M


Vertical

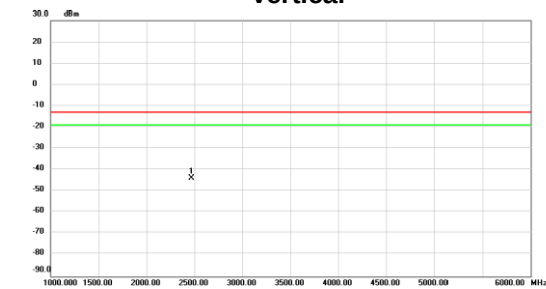

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2472.500	-60.81	16.96	-43.85	-13.00	-30.85	peak	

Test Mode : NR n77_TX CH656000_100M


Horizontal

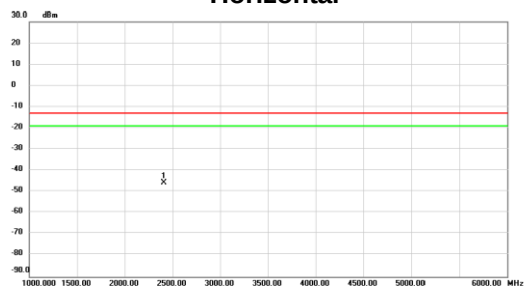

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2410.000	-62.59	16.86	-45.73	-13.00	-32.73	peak	

Test Mode : NR n77_TX CH656000_100M


Vertical

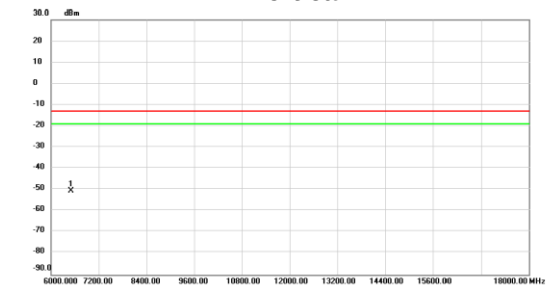

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6504.000	-69.14	18.45	-50.69	-13.00	-37.69	peak	

Test Mode : NR n77_TX CH656000_100M


Horizontal

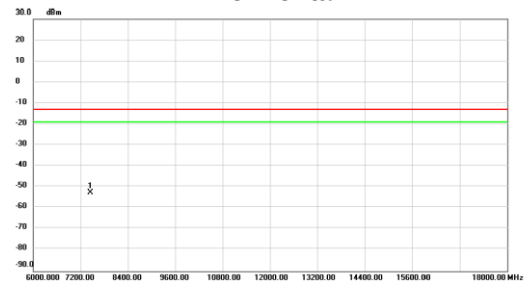

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7452.000	-71.49	18.74	-52.75	-13.00	-39.75	peak	

Test Mode : NR n77_TX CH656000_100M


Vertical

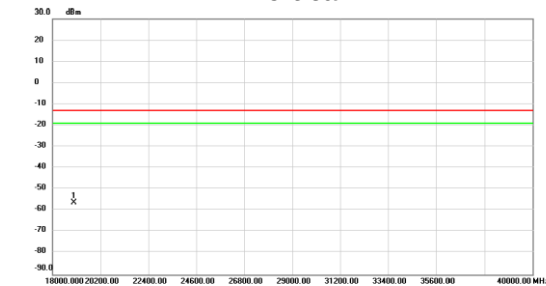

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18972.40	-54.92	-1.30	-56.22	-13.00	-43.22	peak	

Test Mode : NR n77_TX CH656000_100M


Horizontal

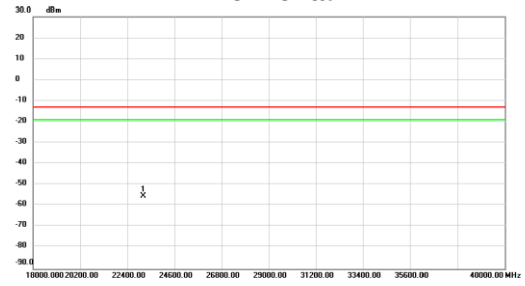

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	23159.00	-58.49	3.01	-55.48	-13.00	-42.48	peak	

Test Mode : NR n78_TX CH650000_10M


Vertical

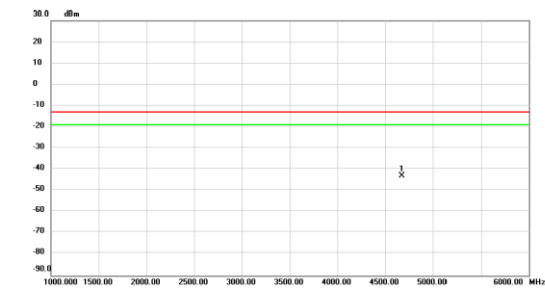

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	4675.000	-66.14	23.07	-43.07	-13.00	-30.07	peak	

Test Mode : NR n78_TX CH650000_10M


Horizontal

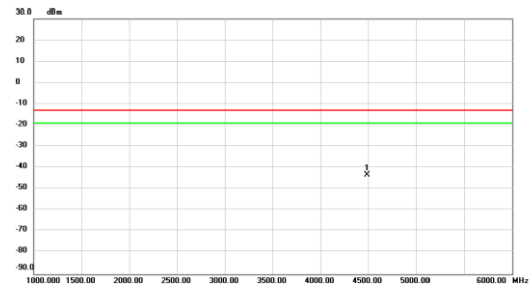

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	4492.500	-65.92	22.52	-43.40	-13.00	-30.40	peak	

Test Mode : NR n78_TX CH650000_10M


Vertical

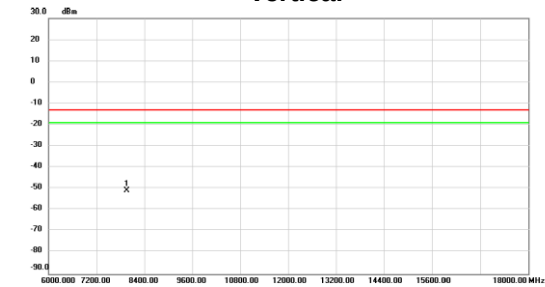

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	7956.000	-69.57	18.82	-50.75	-13.00	-37.75	peak	


Test Mode : NR n78_TX CH650000_10M

Horizontal

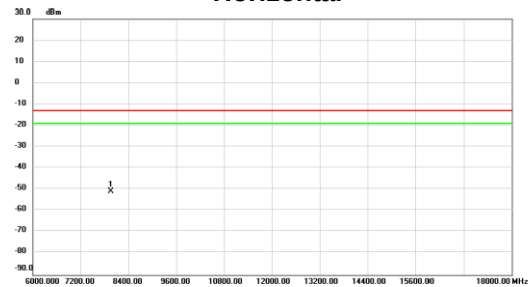


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	7956.000	-69.57	18.82	-50.75	-13.00	-37.75	peak	

Test Mode : NR n78_TX CH650000_10M

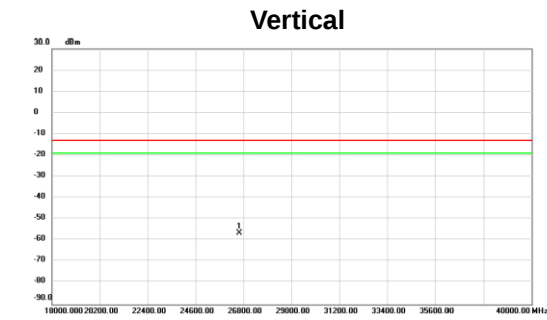


No. Msk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	26611.90	-60.32	3.69	-56.63	-13.00	-43.63	peak	

Test Mode : NR n78_TX CH650000_10M

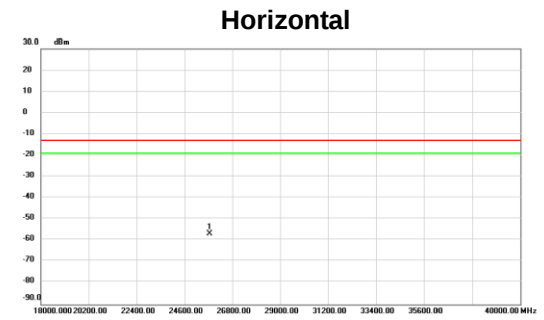


No. Msk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	25762.70	-60.60	3.66	-56.94	-13.00	-43.94	peak	

Test Mode : NR n78_TX CH650000_100M

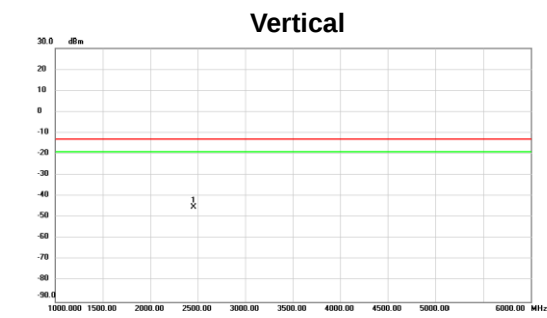

No. Msk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	2455.000	-61.96	16.92	-45.04	-13.00	-32.04	peak	


Test Mode : NR n78_TX CH650000_100M

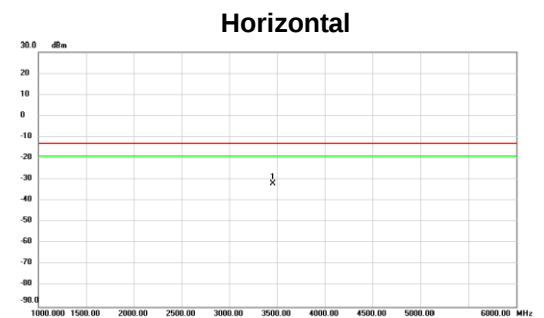

No. Msk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	3455.000	-51.13	19.12	-32.01	-13.00	-19.01	peak	

Test Mode : NR n78_TX CH650000_100M


Vertical

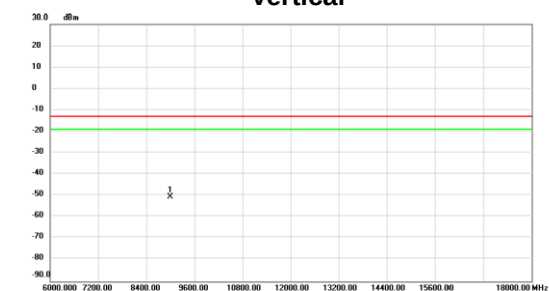

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	9006.000	-69.48	18.86	-50.62	-13.00	-37.62	peak	

Test Mode : NR n78_TX CH650000_100M


Horizontal

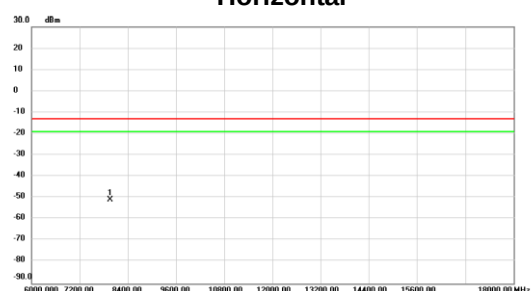

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	7956.000	-69.57	18.82	-50.75	-13.00	-37.75	peak	

Test Mode : NR n78_TX CH650000_100M


Vertical

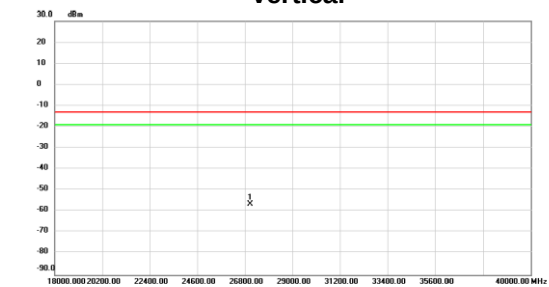

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	27049.70	-59.97	3.34	-56.63	-13.00	-43.63	peak	

Test Mode : NR n78_TX CH650000_100M


Horizontal

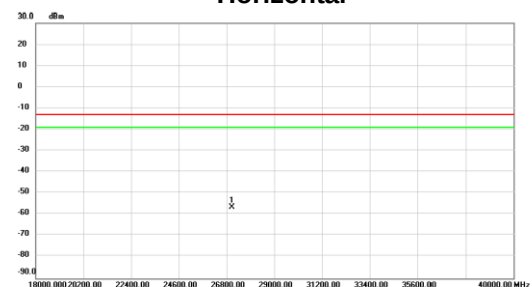

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	27049.70	-59.97	3.34	-56.63	-13.00	-43.63	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M


Vertical

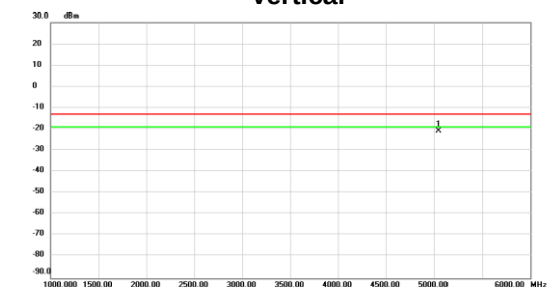

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	5052.500	-44.85	24.06	-20.79	-13.00	-7.79	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M


Horizontal

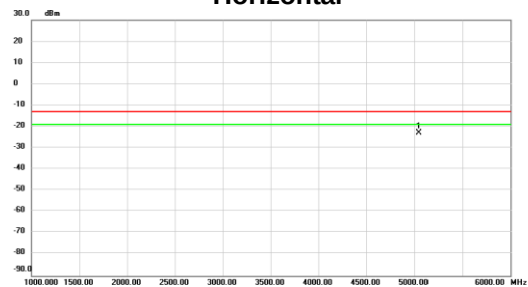

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	5052.500	-47.13	24.06	-23.07	-13.00	-10.07	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M


Vertical

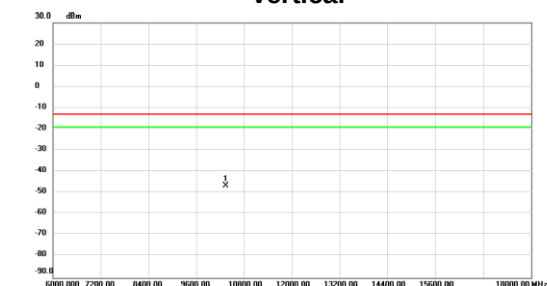

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	10338.000	-64.95	18.36	-46.59	-13.00	-33.59	peak	


Test Mode : DC_7A_n78_TX Mid-CH_10M

Horizontal

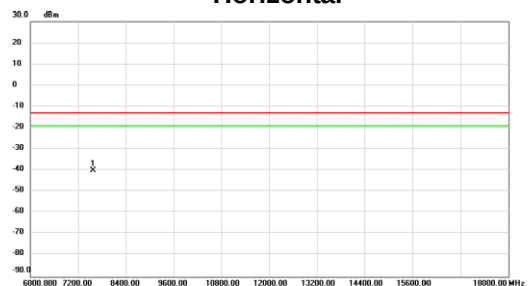


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	7578.000	-58.49	18.50	-39.99	-13.00	-26.99	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M

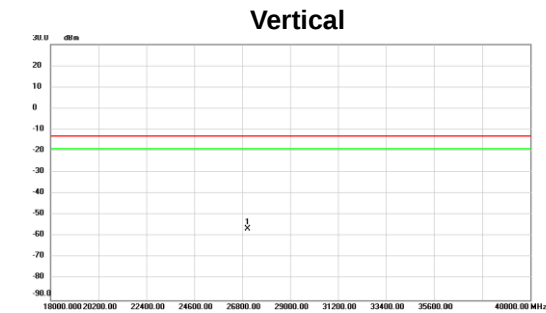


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	27049.70	-59.97	3.34	-56.63	-13.00	-43.63	peak	

Test Mode : DC_7A_n78_TX Mid-CH_10M

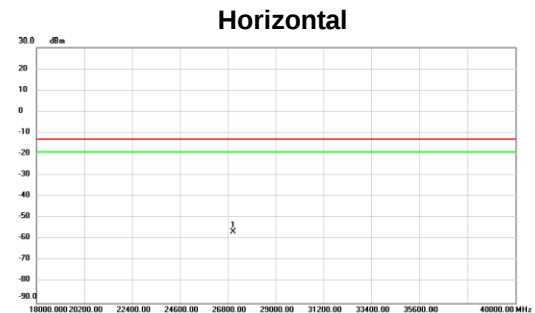


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	27049.70	-59.97	3.34	-56.63	-13.00	-43.63	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

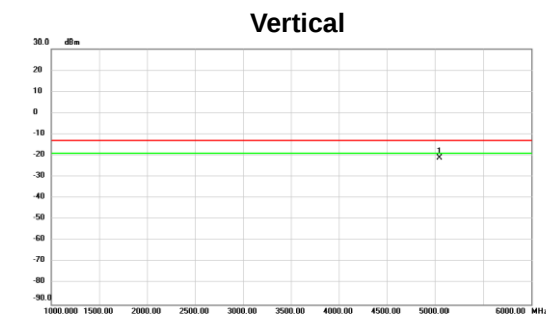


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	5052.500	-45.34	24.06	-21.28	-13.00	-8.28	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

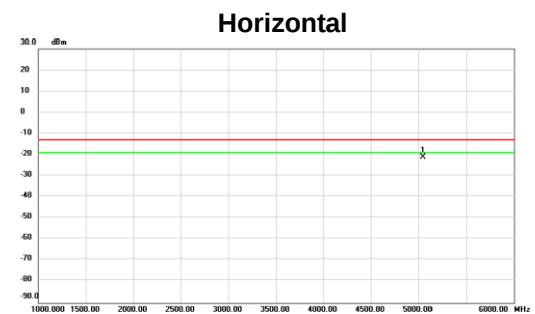


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBm	dB	dBm	dBm	dB		
1 *	5052.500	-45.19	24.06	-21.13	-13.00	-8.13	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

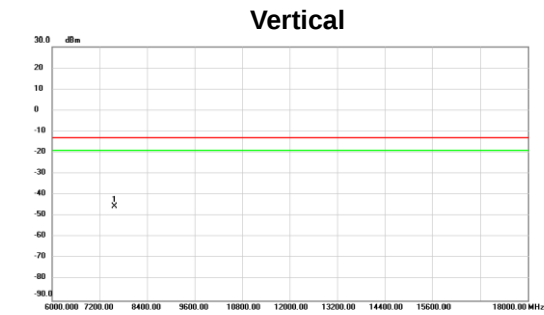


No. Mks	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	7578.000	-63.62	18.50	-45.32	-13.00	-32.32	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

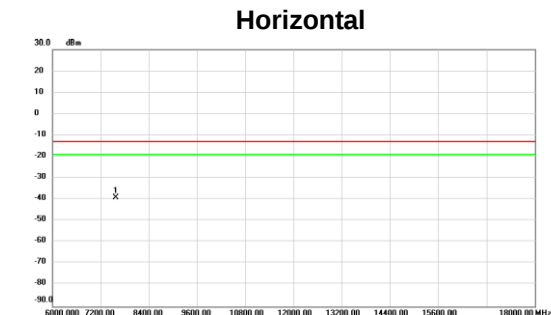


No. Mks	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	7578.000	-57.65	18.50	-39.15	-13.00	-26.15	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

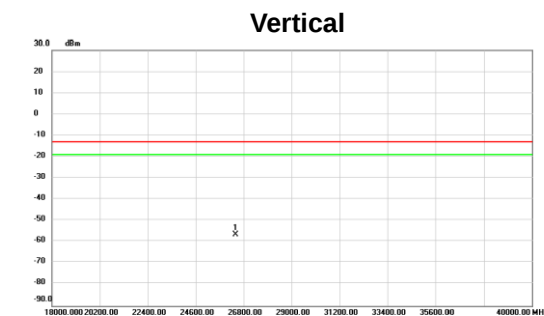

No. Mks	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	26433.70	-60.38	3.78	-56.60	-13.00	-43.60	peak	

Test Mode : DC_7A_n78_TX Mid-CH_100M

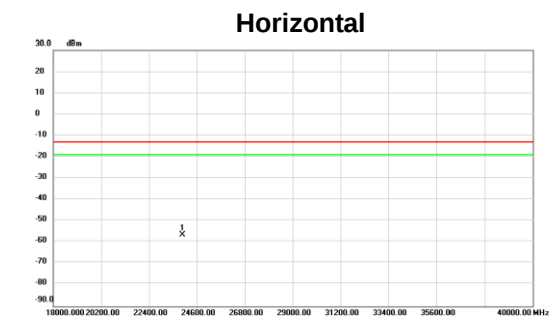

No. Mks	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	23940.00	-60.20	3.52	-56.68	-13.00	-43.68	peak	

APPENDIX G - BAND EDGE

