

***Digianswer A/S***



**SOFTWARE SUITE**

**USB ADAPTER INSTALLATION GUIDE**

# Contents

**About this guide, 3**

**System requirements, 3**

**Connecting USB adapter, 4**

**Installing drivers, 4**

**Installing application software, 5**

**Uninstalling application software, 6**

**Operation, 6**

**Regulatory statements, 7**

## CAUTION

### **FCC Radio-Frequency Exposure Statement**

This equipment generates and radiates radio-frequency energy. In order to comply with FCC radio-frequency radiation exposure guidelines for an uncontrolled environment, this equipment has to be installed and operated while maintaining a minimum body to antenna distance of 20 cm.

Users are not permitted to make changes or modify the system in any way.

# About this guide

This Installation Guide will show you how to install the **Bluetooth™ Software Suite v1.0**. The instructions will cover:

- Connecting the Bluetooth USB adapter and installing the drivers, i.e. software programs needed for the adapter to work.
- Installing the application software.

Furthermore, users who have a previous version of the Bluetooth Software Suite will find information on how to uninstall the old version before installing the new one.

## Additional documentation

In addition to this Installation Guide, the Bluetooth Software Suite is accompanied by the following documents: A Beginner's Guide providing a general introduction to the Bluetooth technology, and a User's Manual covering all aspects of operating the Bluetooth Software Suite. You will find these documents on the Bluetooth Software Suite CD-ROM.

## Adobe Acrobat Reader

The documents accompanying the Bluetooth Software Suite are provided in the PDF format. To view these documents, you will need Adobe Acrobat Reader. If that program is not already installed on your computer, you can install it from the CD-ROM:

1. Click **Start**.
2. Click **Run**.

3. Type **D:\Acrobat\ar405eng.exe** (substitute the appropriate letter of your CD-ROM drive for **D**).
4. Follow the onscreen prompts to complete the installation of Adobe Acrobat Reader.

When Adobe Acrobat Reader has been installed on your computer, simply double-click a PDF document to open it.

## Disclaimer

Any responsibility or liability for loss or damage in connection with the use of this product and the accompanying documentation is disclaimed. The information in this document is furnished for informational use only, is subject to change without notice, may contain errors or inaccuracies, and represents no commitment whatsoever. This agreement is governed by the laws of Denmark.

*Rev. TR 1.0 00-09-19*

# System Requirements


The Bluetooth Software Suite can be installed on computers running the following operating systems:

- Windows 98
- Windows Me
- Windows 2000

## Connecting USB adapter

To install the Bluetooth Software Suite, first connect the USB adapter to your computer:

1. Turn on the computer.
2. Make sure all programs are closed.
3. Plug the USB adapter into an available USB port at the back of the computer.

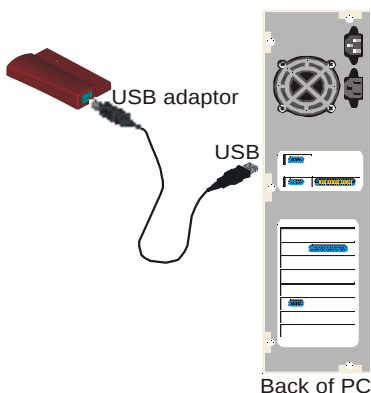

## Installing drivers

The first time you connect the USB adapter to your computer, Windows will tell you that it needs to find drivers for the new hardware. A driver is a software program needed for a piece of hardware to work.

1. Insert the Bluetooth Software Suite CD-ROM.
2. Follow the onscreen prompts to complete the installation of drivers.

### Location of drivers

When Windows asks you to specify the location of the drivers, type the following (substitute the appropriate letter of your CD-ROM drive for **D**):

- Windows 98 and Me users:  
**D:\drivers\win9x**
- Windows 2000 users:  
**D:\drivers\w2k**

### Found New Hardware Wizard

During the installation, the **Found New Hardware Wizard** will appear a number of times. The following drivers are found:

- Bluetooth USB Adapter.
- Bluetooth Ethernet Adapter

**Note:** On *Windows 2000*, if told **Digital Signature Not Found** and asked whether you want to continue, click **Yes**.

In addition on **Windows 2000** the following drivers are found:

- Bluetooth RFCOMM Protocol.
- Bluetooth SDP Protocol.

### Do not remove CD-ROM

Do not remove the Bluetooth Software Suite CD-ROM from the computer until you have installed the application software.

# Installing application software

**Note:** *If a previous version of the Bluetooth Software Suite is installed on your computer, this must be uninstalled before the installation of the new application software can take place. See the section **Uninstalling application software**.*

Having connected the USB adapter, inserted the CD-ROM, and installed the drivers, you are now ready to install the software for the Bluetooth Software Suite applications. To do so, follow the instructions in this section. (If Autorun is enabled on your computer, in some cases steps 1-3 may be skipped.)

1. Click **Start**.
2. Click **Run**.
3. Type **D:\setup.exe** (substitute the appropriate letter of your CD-ROM drive for **D**).
4. Follow the onscreen prompts to complete the installation of the application software.

## Adding new folders

During the installation, the program will ask where to install the Bluetooth Software Suite files. A destination folder is suggested that should suit most users: **C:\...\ Bluetooth Software Suite ...** Alternatively, you can browse for any destination you prefer.

Furthermore, the program will ask where to add the Bluetooth Software Suite icons. A program folder is suggested that should suit most users: **C:\...\ Bluetooth Software Suite ...** Alternatively, you can type a new folder name in **Program Folders**, or select one from **Existing Folders**.

## Creating network profiles

During the installation, the **Network Manager Wizard** will create two network profiles on your system: one saving your current system network settings and one to be used for Bluetooth ad hoc networking. The program will guide you through this procedure. For more information on Bluetooth networking, please refer to the User's Manual.

## Restart now

When the installation is complete, the program will ask if the computer should be restarted now or later. To be able to operate the Bluetooth Software Suite, restart the computer.

# Uninstalling application software

If a previous version of the Bluetooth Software Suite is installed on your computer, you must uninstall it before the installation of the new program can take place. When the installation program has installed the drivers, it will discover any old versions of the Bluetooth Software Suite on your computer. The program will then ask if you want the deinstallation of the old version to take place automatically or manually.

## Uninstalling automatically

The program will suggest that you have the old version of the Bluetooth Software Suite uninstalled automatically. To do so, follow the onscreen instructions.

**Note:** *When the old version of the Bluetooth Software Suite has been uninstalled automatically, the installation program will ask if you want to restart your computer. Whether you answer yes or no, the program will now begin installing the new application software.*

## Uninstalling manually

Some users may prefer to uninstall previous versions of the Bluetooth Software Suite manually. To do so, when the program asks, select the manual procedure. Then, to uninstall:

1. Quit all programs.
2. Click **Start**.

3. Point to **Programs**.
4. Point to ... **Bluetooth Software Suite v...**
5. Click **Uninstall**.
6. Click ... **Bluetooth Software Suite v...**
7. Follow the onscreen instructions to complete uninstalling the program.

When you have uninstalled the previous version of the Bluetooth Software Suite, proceed with the installation of the new application software (as described in the section **Installing application software**).

# Operation

When you have finished the installation, you can remove the Bluetooth Software Suite CD-ROM from your computer. However, when operating the Bluetooth Software Suite, the USB adapter must always be connected to your computer. If the USB adapter is removed, the Bluetooth radio cannot communicate with other Bluetooth devices.

For detailed information on how to operate the Bluetooth Software Suite, please refer to the User's Manual and online help accompanying the program.

# Regulatory statements

## General

This product complies with any mandatory product specification in any country where the product is sold. In addition, the product complies with the following.

## European Union (EU) and EFTA

This equipment complies with the R&TTE directive 1999/5/EC and has been provided with the CE mark accordingly.

Note that the radio frequency band used by this equipment has not been harmonized in all of the EU.

## United States of America and Canada

Tested To Comply With FCC Standards FOR HOME OR OFFICE USE. See FCC 47CFR part 15.19(b)(2).

This device complies with part 15 of the FCC rules and with RSS-210 / RSS-139 of the Industry Canada. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note that any changes or modifications to this equipment not expressly approved by the manufacturer may void the FCC authorization to operate this equipment.

## Canada

### IC Notice

To prevent radio interference to the licensed service, this device is intended to be operated indoors and away from windows to provide maximum shielding. Equipment that is installed outdoors is subject to licensing.

<In French>

Pour empêcher un brouillage radioélectrique au service faisant l'objet d'une licence, cet appareil doit être utilisé à l'intérieur et loin des fenêtres afin de fournir un écran de blindage maximal. Au cas où une installation en plein air, le matériel doit faire l'objet d'une licence.

## Japan

この機器の使用周波数帯では、電子レンジ等の産業・科学・医療用機器のほか工場の製造ライン等で使用されている移動体識別用の構内無線局（免許を要する無線局）及び特定小電力無線局（免許を要しない無線局）が運用されています。

1 この機器を使用する前に、近くで移動体識別用の構内無線局及び特定小電力無線局が運用されていないことを確認して下さい。

2 万一、この機器から移動体識別用の構内無線局に対して電波干渉の事例が発生した場合には、速やかに使用周波数を変更するか又は電波の発射を停止した上、下記連絡先にご連絡頂き、風信回避のための処置等（例えば、パーティションの設置など）についてご相談して下さい。

3 その他、この機器から移動体識別用の特定小電力無線局に対して電波干渉の事例が発生した場合など何かお困りのことが起きたときは、次の連絡先へお問い合わせ下さい。

連絡先： \_\_\_\_\_

Japan office:

Address: BIA Inc.  
No. 202 Gobancho House  
4-22 Gobancho  
Chiyoda-Ku, Tokyo 102-0076  
Phone 03 5276 5984  
Fax: 03 5276 0625  
E-mail: biasib@gol.com

