

Mode:	AC40-5310
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	47.94	68.23	20.29	45.17	54.00	8.83	150	79	Horizontal	PASS
2	5351.8	19.05	50.89	74.00	23.11	48.57	54.00	5.43	150	218	Horizontal	PASS
3	5369.92	18.55	50.07	74.00	23.93	46.87	54.00	7.13	150	157	Horizontal	PASS
4	5392.24	18.26	49.40	74.00	24.60	47.26	54.00	6.74	150	189	Horizontal	PASS
5	5413.84	18.13	50.42	74.00	23.58	47.83	54.00	6.17	150	157	Horizontal	PASS
6	5460	18.03	46.08	74.00	27.92	43.69	54.00	10.31	150	97	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	47.54	68.23	20.69	46.01	54.00	7.99	150	177	Vertical	PASS
2	5375.44	18.48	49.45	74.00	24.55	47.21	54.00	6.79	150	181	Vertical	PASS
3	5396.92	18.20	48.88	74.00	25.12	44.35	54.00	9.65	150	98	Vertical	PASS
4	5427.52	18.10	49.76	74.00	24.24	46.26	54.00	7.74	150	14	Vertical	PASS
5	5437.84	18.08	48.79	74.00	25.21	46.12	54.00	7.88	150	342	Vertical	PASS
6	5460	18.03	46.26	74.00	27.74	43.47	54.00	10.53	150	66	Vertical	PASS

Mode:	AC40-5510
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	47.35	68.23	20.88	45.57	54.00	8.43	150	334	Horizontal	PASS
2	5374.72	18.14	48.51	74.00	25.49	43.60	54.00	10.40	150	120	Horizontal	PASS
3	5400.28	18.41	49.42	74.00	24.58	46.75	54.00	7.25	150	91	Horizontal	PASS
4	5421.28	18.79	49.50	74.00	24.50	46.33	54.00	7.67	150	198	Horizontal	PASS
5	5440.48	19.15	50.16	74.00	23.84	47.71	54.00	6.29	150	341	Horizontal	PASS
6	5460	19.51	49.93	74.00	24.07	46.78	54.00	7.22	150	334	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	48.07	68.23	20.16	46.37	54.00	7.63	150	147	Vertical	PASS
2	5386.84	18.26	50.12	74.00	23.88	47.60	54.00	6.40	150	75	Vertical	PASS
3	5415.4	18.68	51.36	74.00	22.64	44.05	54.00	9.95	150	335	Vertical	PASS
4	5439.28	19.12	49.82	74.00	24.18	45.17	54.00	8.83	150	147	Vertical	PASS
5	5459.56	19.50	50.01	74.00	23.99	47.74	54.00	6.26	150	38	Vertical	PASS
6	5460	19.51	47.78	74.00	26.22	45.36	54.00	8.64	150	176	Vertical	PASS

Mode: AC40-5755

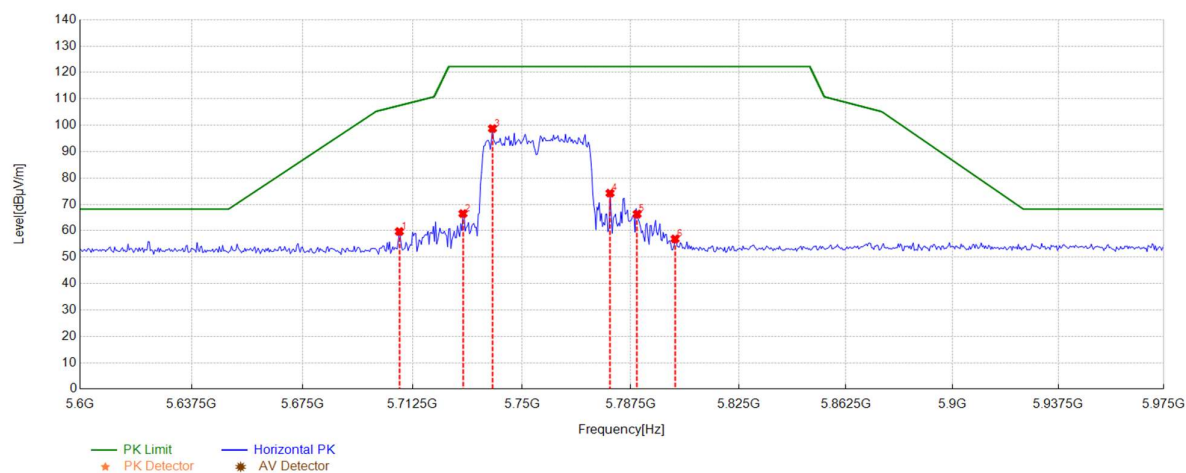


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5708	59.73	14.94	107.44	47.71	150	354	Horizontal
2	5729.75	66.51	14.87	122.20	55.69	150	66	Horizontal
3	5739.87	98.74	14.84	122.20	23.46	150	349	Horizontal
4	5780.37	74.26	14.72	122.20	47.94	150	349	Horizontal
5	5789.75	66.34	14.69	122.20	55.86	150	349	Horizontal
6	5802.87	56.93	14.67	122.20	65.27	150	88	Horizontal

Mode: AC40-5755

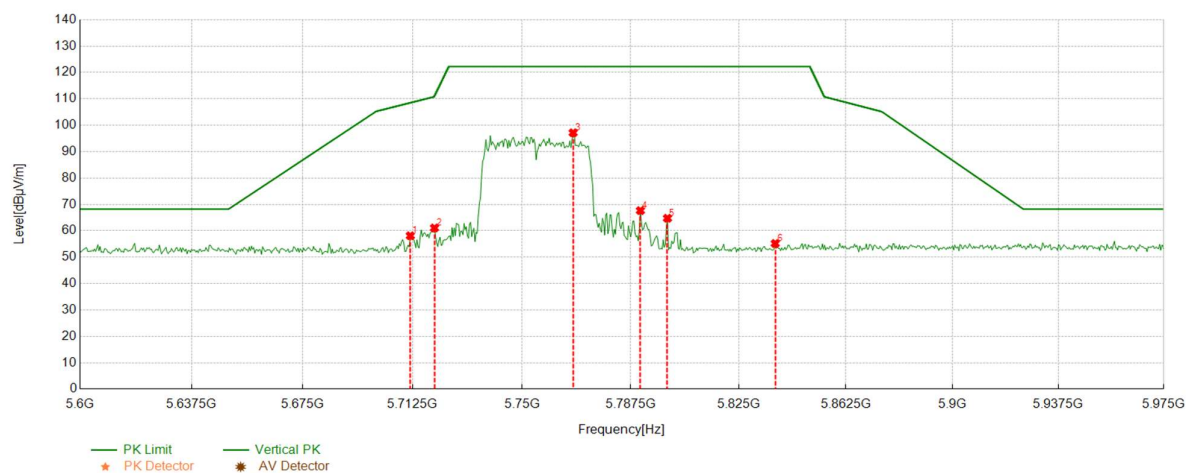


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5711.75	58.13	14.92	108.49	50.36	150	230	Vertical
2	5720	61.08	14.90	110.80	49.72	150	258	Vertical
3	5767.62	97.16	14.76	122.20	25.04	150	27	Vertical
4	5790.87	67.66	14.69	122.20	54.54	150	21	Vertical
5	5800.25	64.76	14.66	122.20	57.44	150	21	Vertical
6	5837.75	55.20	14.80	122.20	67.00	150	189	Vertical

Mode: AC40-5795

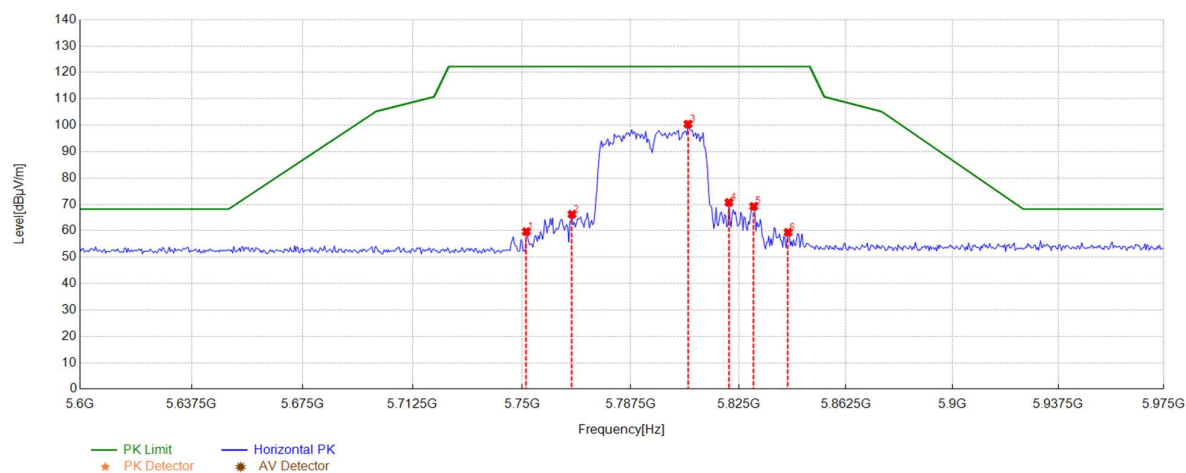

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5751.5	59.70	14.81	122.20	62.50	150	72	Horizontal
2	5767.25	66.24	14.76	122.20	55.96	150	82	Horizontal
3	5807.37	100.43	14.68	122.20	21.77	150	351	Horizontal
4	5821.62	70.77	14.73	122.20	51.43	150	358	Horizontal
5	5830.25	69.26	14.77	122.20	52.94	150	3	Horizontal
6	5842.25	59.42	14.80	122.20	62.78	150	358	Horizontal

Mode: AC40-5795

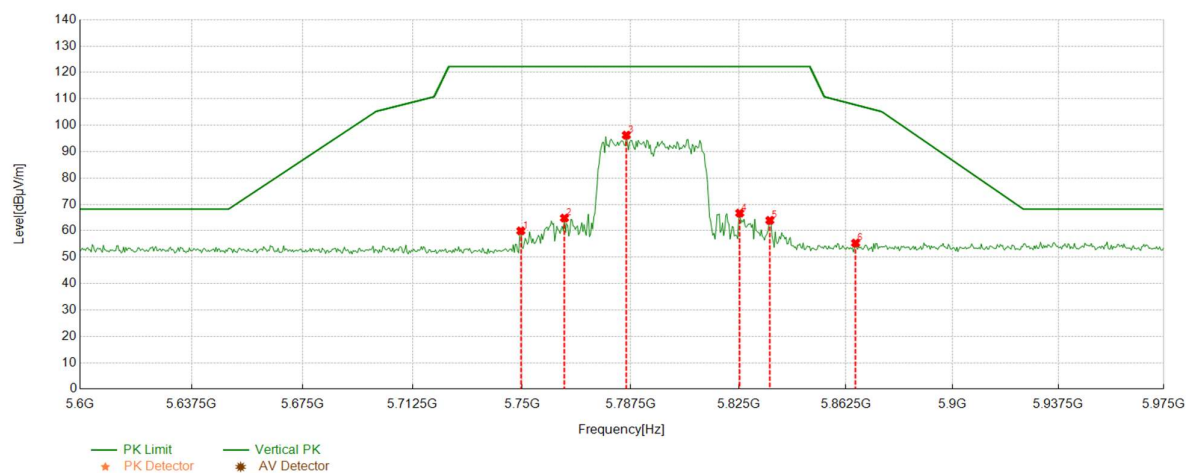

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5749.62	59.99	14.81	122.20	62.21	150	25	Vertical
2	5764.62	64.82	14.77	122.20	57.38	150	256	Vertical
3	5786	96.25	14.70	122.20	25.95	150	16	Vertical
4	5825.37	66.72	14.75	122.20	55.48	150	33	Vertical
5	5835.87	63.98	14.78	122.20	58.22	150	234	Vertical
6	5865.87	55.36	14.92	107.75	52.39	150	199	Vertical

Mode:	AC80-5210
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	14.97	46.07	68.23	22.16	44.99	54.00	9.01	100	82	Horizontal	PASS
2	4959.1827	16.29	51.48	74.00	22.52	49.74	54.00	4.26	100	271	Horizontal	PASS
3	5025.2998	16.28	50.84	74.00	23.16	47.71	54.00	6.29	100	286	Horizontal	PASS
4	5113.3693	16.85	57.93	74.00	16.07	48.29	54.00	5.71	100	8	Horizontal	PASS
5	5143.765	17.89	58.66	74.00	15.34	50.70	54.00	3.30	100	63	Horizontal	PASS
6	5150	18.89	48.61	74.00	25.39	47.62	54.00	6.38	100	70	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	14.97	45.18	68.23	23.05	44.63	54.00	9.37	100	329	Vertical	PASS
2	4535.7214	15.12	47.90	74.00	26.10	47.91	54.00	6.09	100	299	Vertical	PASS
3	4736.1511	16.28	55.16	74.00	18.84	50.26	54.00	3.74	100	288	Vertical	PASS
4	4934.7622	16.30	52.16	74.00	21.84	51.29	54.00	2.71	100	193	Vertical	PASS
5	5077.2582	16.34	49.89	74.00	24.11	47.88	54.00	6.12	100	337	Vertical	PASS
6	5150	18.89	49.00	74.00	25.00	48.01	54.00	5.99	100	222	Vertical	PASS

Mode:	AC80-5290
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.42	68.23	19.81	45.77	54.00	8.23	150	83	Horizontal	PASS
2	5350.36	19.19	54.92	74.00	19.08	48.34	54.00	5.66	150	64	Horizontal	PASS
3	5352.4	18.99	54.43	74.00	19.57	47.96	54.00	6.04	150	64	Horizontal	PASS
4	5355.52	18.74	52.93	74.00	21.07	45.50	54.00	8.50	150	64	Horizontal	PASS
5	5375.32	18.48	54.95	74.00	19.05	47.21	54.00	6.79	150	62	Horizontal	PASS
6	5460	18.03	47.96	74.00	26.04	44.82	54.00	9.18	150	134	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.12	68.23	20.11	45.96	54.00	8.04	150	112	Vertical	PASS
2	5368.96	18.57	50.69	74.00	23.31	47.51	54.00	6.49	150	68	Vertical	PASS
3	5392.6	18.26	49.16	74.00	24.84	47.36	54.00	6.64	150	131	Vertical	PASS
4	5416.6	18.12	48.50	74.00	25.50	46.69	54.00	7.31	150	356	Vertical	PASS
5	5451.04	18.05	47.81	74.00	26.19	44.42	54.00	9.58	150	0	Vertical	PASS
6	5460	18.03	47.10	74.00	26.90	44.44	54.00	9.56	150	324	Vertical	PASS

Mode:	AC80-5530
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	46.97	68.23	21.26	44.65	54.00	9.35	150	4	Horizontal	PASS
2	5433.76	19.02	54.03	74.00	19.97	50.21	54.00	3.79	150	360	Horizontal	PASS
3	5450.44	19.33	52.11	74.00	21.89	49.00	54.00	5.00	150	69	Horizontal	PASS
4	5452.6	19.37	53.11	74.00	20.89	50.18	54.00	3.82	150	40	Horizontal	PASS
5	5456.08	19.43	52.40	74.00	21.60	46.78	54.00	7.22	150	40	Horizontal	PASS
6	5460	19.51	49.18	74.00	24.82	46.09	54.00	7.91	150	148	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	47.90	68.23	20.33	43.73	54.00	10.27	150	183	Vertical	PASS
2	5435.92	19.06	50.83	74.00	23.17	45.81	54.00	8.19	150	356	Vertical	PASS
3	5449.24	19.31	50.71	74.00	23.29	48.30	54.00	5.70	150	119	Vertical	PASS
4	5452.12	19.36	51.58	74.00	22.42	48.58	54.00	5.42	150	248	Vertical	PASS
5	5453.8	19.39	52.07	74.00	21.93	48.75	54.00	5.25	150	126	Vertical	PASS
6	5460	19.51	48.80	74.00	25.20	47.08	54.00	6.92	150	0	Vertical	PASS

Mode: AC80-5775

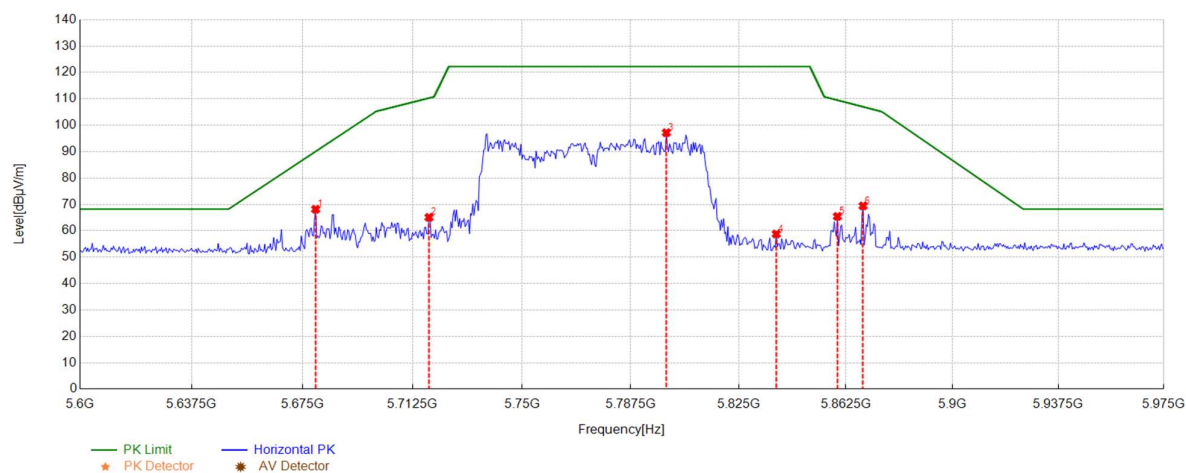

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5679.5	68.17	14.93	90.08	21.91	150	60	Horizontal
2	5718.12	65.10	14.91	110.28	45.18	150	155	Horizontal
3	5799.87	97.20	14.66	122.20	25.00	150	349	Horizontal
4	5838.12	58.79	14.80	122.20	63.41	150	165	Horizontal
5	5859.5	65.44	14.89	109.54	44.10	150	331	Horizontal
6	5868.5	69.43	14.93	107.02	37.59	150	355	Horizontal

Mode: AC80-5775

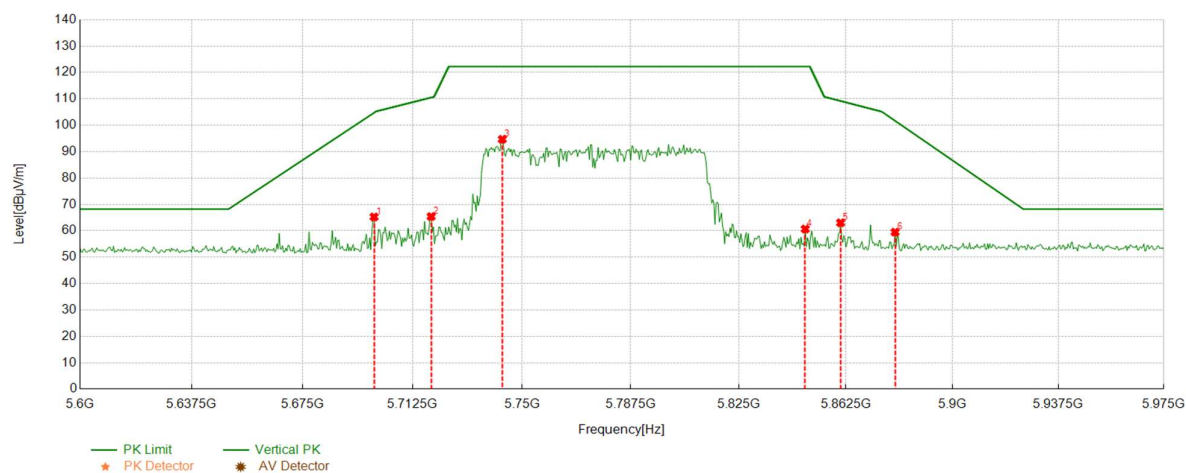

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5699.37	65.28	14.96	104.74	39.46	150	226	Vertical
2	5718.87	65.42	14.90	110.49	45.07	150	232	Vertical
3	5743.25	94.68	14.83	122.20	27.52	150	349	Vertical
4	5848.25	60.69	14.83	122.20	61.51	150	23	Vertical
5	5860.62	63.04	14.89	109.22	46.18	150	252	Vertical
6	5879.75	59.49	15.00	101.67	42.18	150	28	Vertical

Mode:	AX20-5180
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	48.00	74.00	26.00	44.67	54.00	9.33	150	184	Horizontal	PASS
2	4869.2	14.45	52.82	74.00	21.18	50.06	54.00	3.94	150	326	Horizontal	PASS
3	4938.75	14.30	52.88	74.00	21.12	50.74	54.00	3.26	150	319	Horizontal	PASS
4	5007	14.27	52.26	74.00	21.74	47.08	54.00	6.92	150	126	Horizontal	PASS
5	5096.05	14.39	53.63	74.00	20.37	50.02	54.00	3.98	150	43	Horizontal	PASS
6	5150	16.89	54.17	74.00	19.83	50.49	54.00	3.51	150	266	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	49.60	74.00	24.40	46.24	54.00	7.76	150	156	Vertical	PASS
2	4890	14.36	52.87	74.00	21.13	47.90	54.00	6.10	150	147	Vertical	PASS
3	4932.9	14.30	53.99	74.00	20.01	48.06	54.00	5.94	150	116	Vertical	PASS
4	5044.05	14.28	52.74	74.00	21.26	49.47	54.00	4.53	150	309	Vertical	PASS
5	5125.3	15.26	54.10	74.00	19.90	49.64	54.00	4.36	150	53	Vertical	PASS
6	5150	16.89	52.27	74.00	21.73	48.37	54.00	5.63	150	96	Vertical	PASS

Mode:	AX20-5320
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	50.55	68.23	17.68	46.62	54.00	7.38	150	56	Horizontal	PASS
2	5369.92	18.55	49.83	74.00	24.17	46.86	54.00	7.14	150	195	Horizontal	PASS
3	5395.24	18.22	49.90	74.00	24.10	48.39	54.00	5.61	150	295	Horizontal	PASS
4	5414.92	18.13	49.20	74.00	24.80	44.18	54.00	9.82	150	144	Horizontal	PASS
5	5433.76	18.09	49.54	74.00	24.46	47.56	54.00	6.44	150	82	Horizontal	PASS
6	5460	18.03	48.24	74.00	25.76	43.58	54.00	10.42	150	261	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.92	68.23	19.31	46.49	54.00	7.51	150	231	Vertical	PASS
2	5369.56	18.56	50.50	74.00	23.50	47.94	54.00	6.06	150	119	Vertical	PASS
3	5392.36	18.26	49.93	74.00	24.07	45.02	54.00	8.98	150	183	Vertical	PASS
4	5443	18.07	50.28	74.00	23.72	46.39	54.00	7.61	150	285	Vertical	PASS
5	5447.68	18.06	50.25	74.00	23.75	46.85	54.00	7.15	150	250	Vertical	PASS
6	5460	18.03	47.33	74.00	26.67	44.91	54.00	9.09	150	287	Vertical	PASS

Mode:	AX20-5500
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	46.77	68.23	21.46	43.74	54.00	10.26	150	206	Horizontal	PASS
2	5389.6	18.29	49.85	74.00	24.15	45.59	54.00	8.41	150	138	Horizontal	PASS
3	5414.56	18.67	50.62	74.00	23.38	45.38	54.00	8.62	150	301	Horizontal	PASS
4	5427.64	18.91	50.45	74.00	23.55	44.94	54.00	9.06	150	350	Horizontal	PASS
5	5458.84	19.48	52.77	74.00	21.23	48.70	54.00	5.30	150	26	Horizontal	PASS
6	5460	19.51	49.22	74.00	24.78	45.61	54.00	8.39	150	232	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	47.27	68.23	20.96	44.91	54.00	9.09	150	260	Vertical	PASS
2	5395.6	18.35	49.54	74.00	24.46	45.18	54.00	8.82	150	329	Vertical	PASS
3	5435.56	19.06	50.38	74.00	23.62	48.61	54.00	5.39	150	78	Vertical	PASS
4	5440.36	19.14	50.86	74.00	23.14	45.32	54.00	8.68	150	73	Vertical	PASS
5	5457.04	19.45	51.14	74.00	22.86	47.22	54.00	6.78	150	78	Vertical	PASS
6	5460	19.51	51.15	74.00	22.85	47.88	54.00	6.12	150	265	Vertical	PASS

Mode: AX20-5745

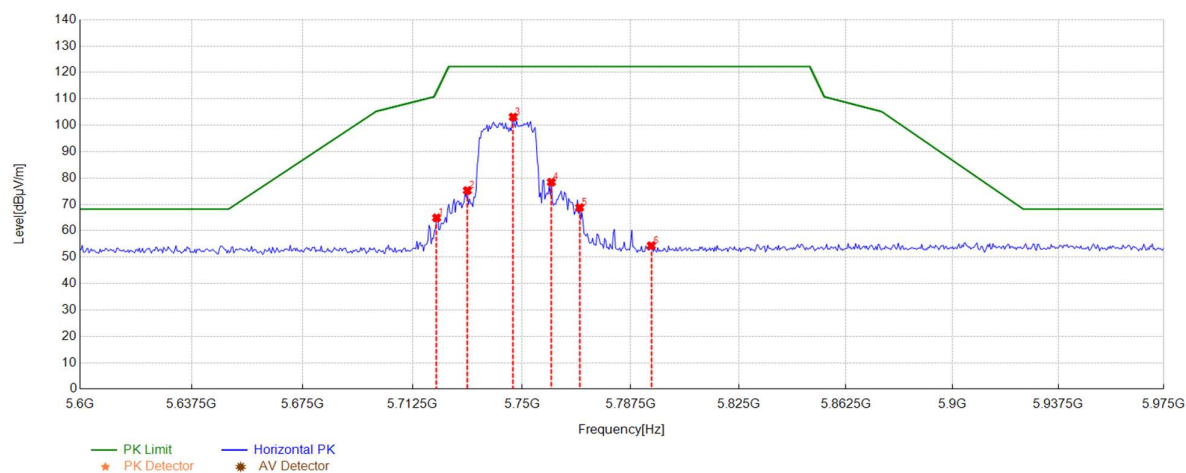


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5720.75	64.92	14.90	112.51	47.59	150	360	Horizontal
2	5731.25	75.27	14.87	122.20	46.93	150	360	Horizontal
3	5747	103.12	14.82	122.20	19.08	150	356	Horizontal
4	5760.12	78.43	14.78	122.20	43.77	150	356	Horizontal
5	5769.87	68.81	14.75	122.20	53.39	150	356	Horizontal
6	5794.62	54.36	14.68	122.20	67.84	150	349	Horizontal

Mode: AX20-5745

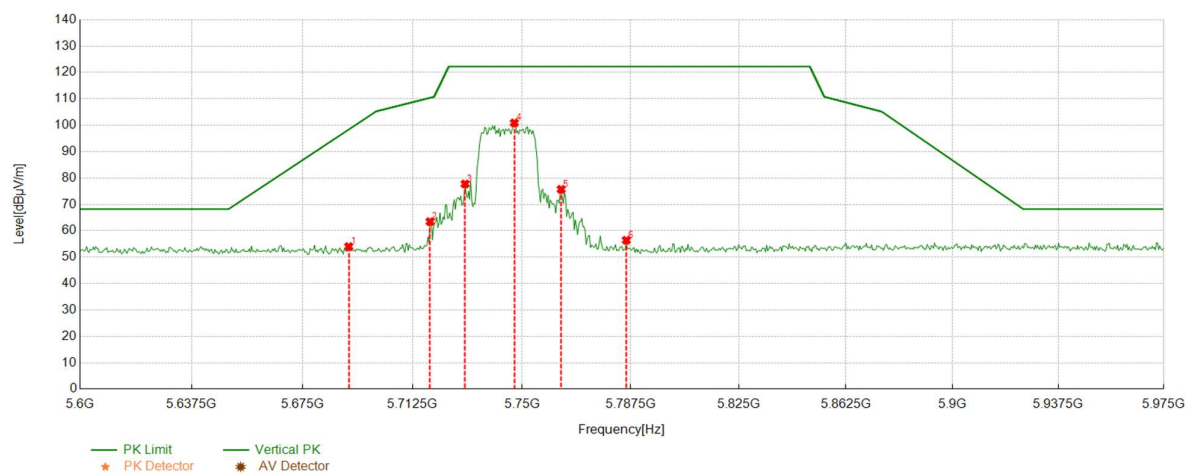


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5690.75	54.03	14.94	98.39	44.36	150	165	Vertical
2	5718.5	63.48	14.90	110.38	46.90	150	229	Vertical
3	5730.5	77.76	14.87	122.20	44.44	150	255	Vertical
4	5747.37	100.91	14.82	122.20	21.29	150	231	Vertical
5	5763.5	75.73	14.77	122.20	46.47	150	357	Vertical
6	5786	56.44	14.70	122.20	65.76	150	18	Vertical

Mode: AX20-5785

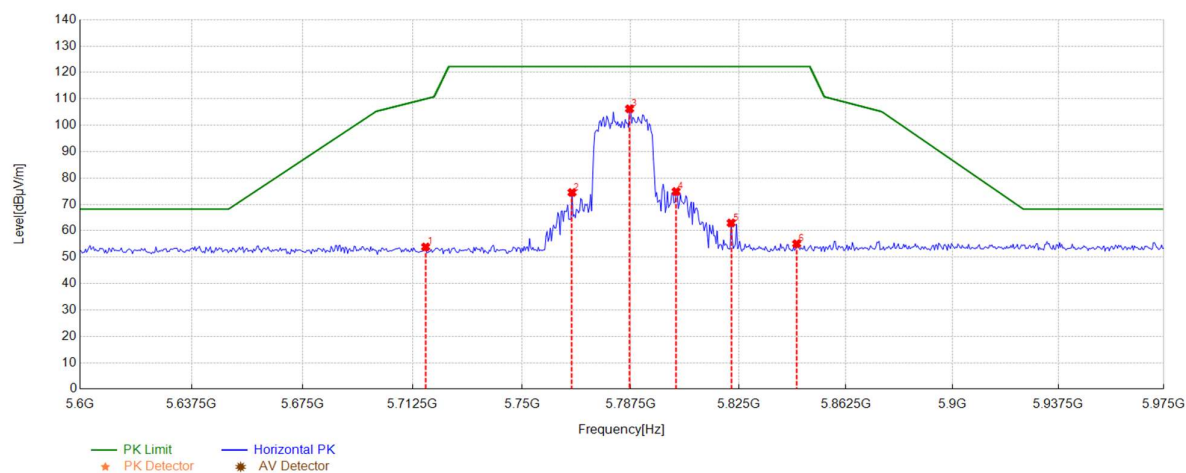


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5717	53.88	14.91	109.96	56.08	150	101	Horizontal
2	5767.25	74.52	14.76	122.20	47.68	150	350	Horizontal
3	5787.12	106.23	14.70	122.20	15.97	150	350	Horizontal
4	5803.25	74.89	14.67	122.20	47.31	150	101	Horizontal
5	5822.37	62.97	14.73	122.20	59.23	150	348	Horizontal
6	5845.25	55.08	14.82	122.20	67.12	150	77	Horizontal

Mode: AX20-5785

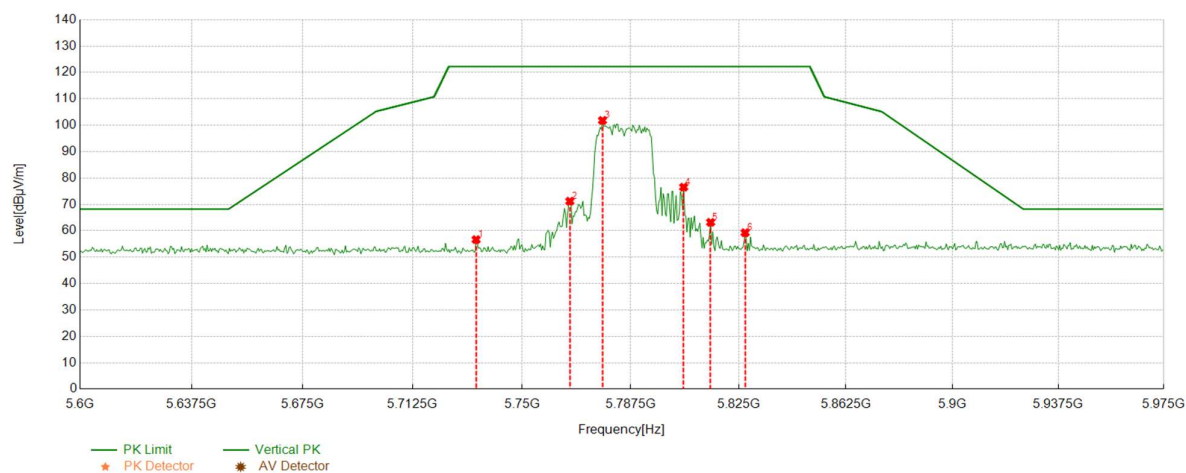


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5734.25	56.67	14.86	122.20	65.53	150	22	Vertical
2	5766.5	71.22	14.76	122.20	50.98	150	18	Vertical
3	5777.75	101.82	14.73	122.20	20.38	150	254	Vertical
4	5805.87	76.54	14.68	122.20	45.66	150	26	Vertical
5	5815.25	63.21	14.71	122.20	58.99	150	0	Vertical
6	5827.25	59.28	14.75	122.20	62.92	150	348	Vertical

Mode: AX20-5825

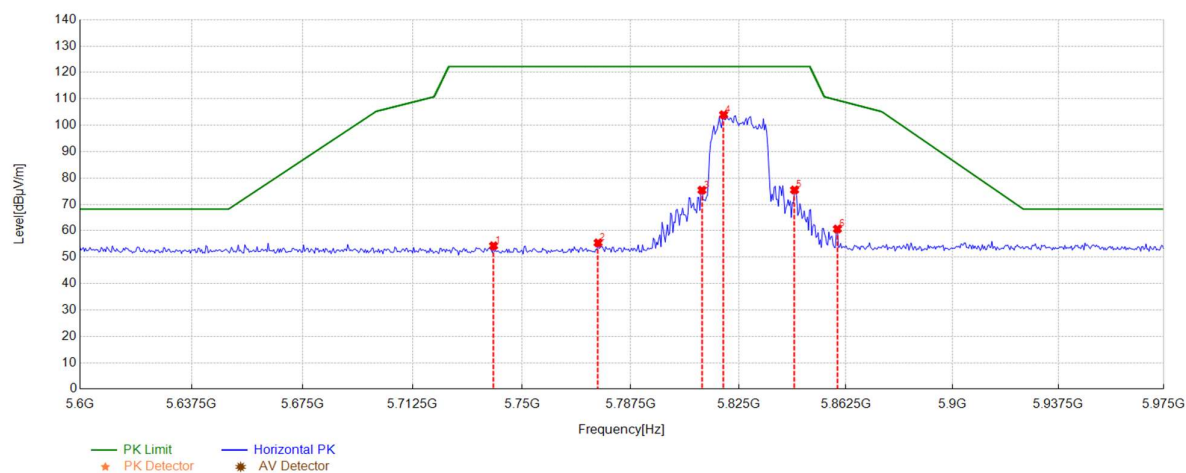

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5740.25	54.34	14.84	122.20	67.86	150	316	Horizontal
2	5776.25	55.44	14.73	122.20	66.76	150	358	Horizontal
3	5812.25	75.41	14.70	122.20	46.79	150	353	Horizontal
4	5819.75	103.99	14.73	122.20	18.21	150	353	Horizontal
5	5844.5	75.48	14.82	122.20	46.72	150	326	Horizontal
6	5859.5	60.69	14.89	109.54	48.85	150	356	Horizontal

Mode: AX20-5825

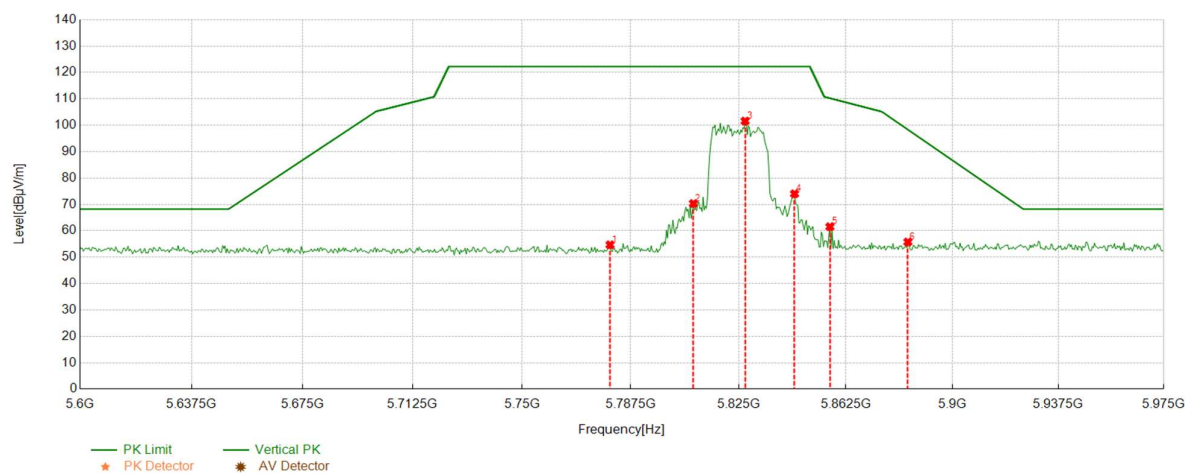

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5780.37	54.70	14.72	122.20	67.50	150	151	Vertical
2	5809.25	70.34	14.69	122.20	51.86	150	238	Vertical
3	5827.25	101.57	14.75	122.20	20.63	150	350	Vertical
4	5844.5	74.03	14.82	122.20	48.17	150	232	Vertical
5	5856.87	61.55	14.88	110.27	48.72	150	3	Vertical
6	5884.25	55.76	15.03	98.34	42.58	150	185	Vertical

Mode:	AX40-5190
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	48.19	74.00	25.81	44.70	54.00	9.30	150	250	Horizontal	PASS
2	4861.4	14.48	53.02	74.00	20.98	47.56	54.00	6.44	150	360	Horizontal	PASS
3	4953.7	14.29	54.20	74.00	19.80	49.21	54.00	4.79	150	152	Horizontal	PASS
4	5040.8	14.28	53.24	74.00	20.76	48.28	54.00	5.72	150	152	Horizontal	PASS
5	5138.95	15.73	53.33	74.00	20.67	48.24	54.00	5.76	150	116	Horizontal	PASS
6	5150	16.89	53.26	74.00	20.74	49.95	54.00	4.05	150	340	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	49.14	74.00	24.86	45.86	54.00	8.14	150	244	Vertical	PASS
2	4849.7	14.53	52.84	74.00	21.16	49.80	54.00	4.20	150	108	Vertical	PASS
3	4918.6	14.31	53.19	74.00	20.81	48.85	54.00	5.15	150	21	Vertical	PASS
4	4951.1	14.29	53.78	74.00	20.22	49.02	54.00	4.98	150	12	Vertical	PASS
5	4997.9	14.27	53.34	74.00	20.66	48.76	54.00	5.24	150	308	Vertical	PASS
6	5150	16.89	53.17	74.00	20.83	50.25	54.00	3.75	150	275	Vertical	PASS

Mode:	AX40-5310
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.86	68.23	19.37	45.39	54.00	8.61	150	335	Horizontal	PASS
2	5352.4	18.99	50.52	74.00	23.48	46.49	54.00	7.51	150	69	Horizontal	PASS
3	5371.72	18.53	50.49	74.00	23.51	46.60	54.00	7.40	150	244	Horizontal	PASS
4	5394.04	18.24	49.66	74.00	24.34	44.76	54.00	9.24	150	191	Horizontal	PASS
5	5420.68	18.11	50.62	74.00	23.38	45.63	54.00	8.37	150	144	Horizontal	PASS
6	5460	18.03	49.29	74.00	24.71	46.63	54.00	7.37	150	289	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	49.30	68.23	18.93	47.82	54.00	6.18	150	250	Vertical	PASS
2	5364.04	18.63	49.47	74.00	24.53	44.98	54.00	9.02	150	167	Vertical	PASS
3	5399.32	18.17	49.48	74.00	24.52	47.91	54.00	6.09	150	219	Vertical	PASS
4	5429.44	18.10	49.28	74.00	24.72	44.76	54.00	9.24	150	344	Vertical	PASS
5	5438.8	18.07	49.89	74.00	24.11	45.12	54.00	8.88	150	112	Vertical	PASS
6	5460	18.03	47.06	74.00	26.94	43.78	54.00	10.22	150	219	Vertical	PASS

Mode:	AX40-5510
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	48.21	68.23	20.02	44.56	54.00	9.44	150	214	Horizontal	PASS
2	5413.6	18.65	50.47	74.00	23.53	47.30	54.00	6.70	150	290	Horizontal	PASS
3	5425.72	18.87	50.42	74.00	23.58	48.39	54.00	5.61	150	176	Horizontal	PASS
4	5444.92	19.23	50.39	74.00	23.61	47.71	54.00	6.29	150	343	Horizontal	PASS
5	5456.32	19.44	51.82	74.00	22.18	47.95	54.00	6.05	150	322	Horizontal	PASS
6	5460	19.51	50.62	74.00	23.38	46.79	54.00	7.21	150	54	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	47.76	68.23	20.47	45.01	54.00	8.99	150	35	Vertical	PASS
2	5389.24	18.29	50.85	74.00	23.15	48.54	54.00	5.46	150	310	Vertical	PASS
3	5411.92	18.62	50.49	74.00	23.51	47.72	54.00	6.28	150	54	Vertical	PASS
4	5422.84	18.82	50.56	74.00	23.44	46.30	54.00	7.70	150	80	Vertical	PASS
5	5450.68	19.33	50.43	74.00	23.57	47.43	54.00	6.57	150	327	Vertical	PASS
6	5460	19.51	49.03	74.00	24.97	47.87	54.00	6.13	150	267	Vertical	PASS

Mode: AX40-5795

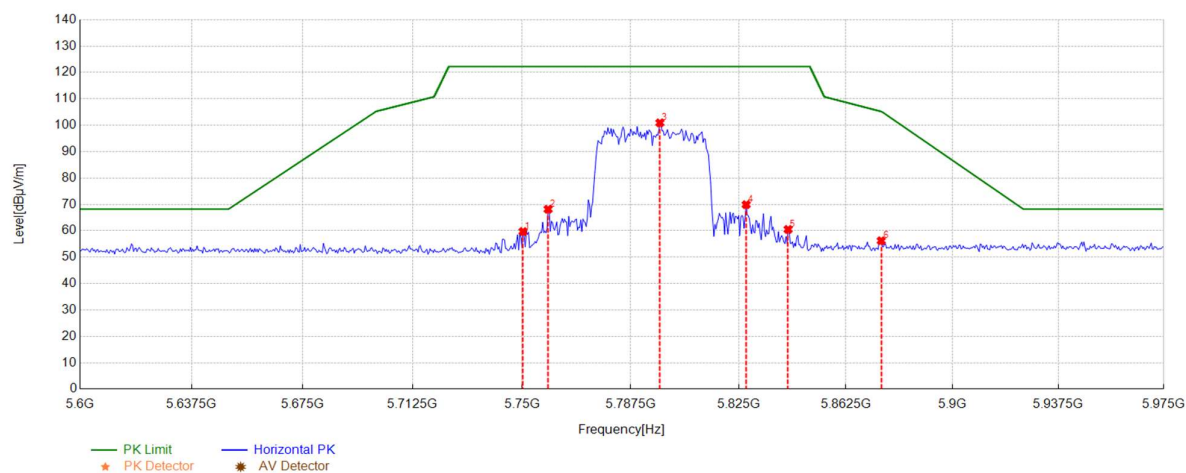


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5750.37	59.73	14.81	122.20	62.47	150	3	Horizontal
2	5759	68.18	14.78	122.20	54.02	150	3	Horizontal
3	5797.62	100.92	14.67	122.20	21.28	150	354	Horizontal
4	5827.62	69.92	14.76	122.20	52.28	150	3	Horizontal
5	5842.25	60.53	14.80	122.20	61.67	150	320	Horizontal
6	5874.87	56.24	14.97	105.23	48.99	150	331	Horizontal

Mode: AX40-5795

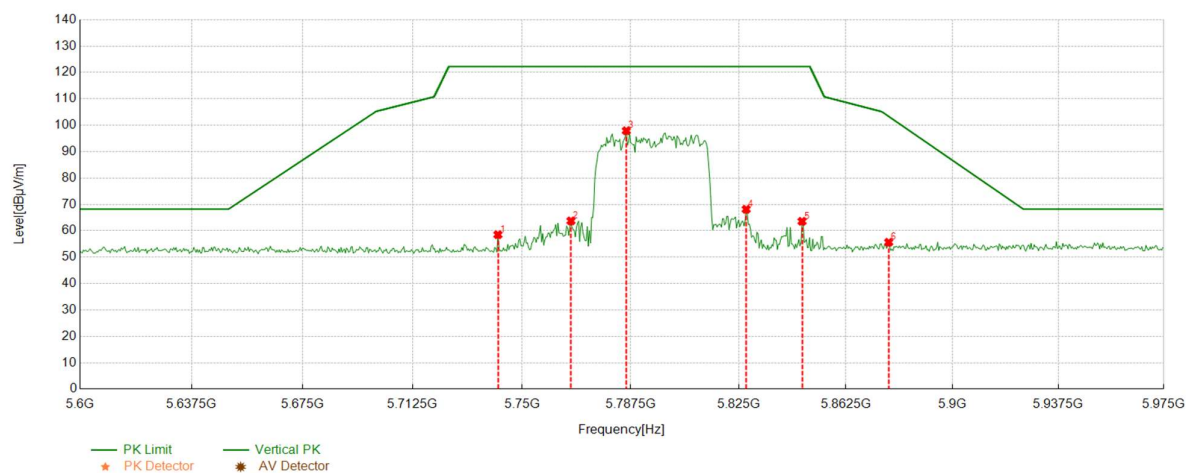


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5741.75	58.54	14.83	122.20	63.66	150	232	Vertical
2	5766.87	63.76	14.76	122.20	58.44	150	232	Vertical
3	5786	97.92	14.70	122.20	24.28	150	16	Vertical
4	5827.62	68.16	14.76	122.20	54.04	150	232	Vertical
5	5847.12	63.59	14.82	122.20	58.61	150	7	Vertical
6	5877.5	55.65	14.99	103.34	47.69	150	324	Vertical

Mode: AX40-5755

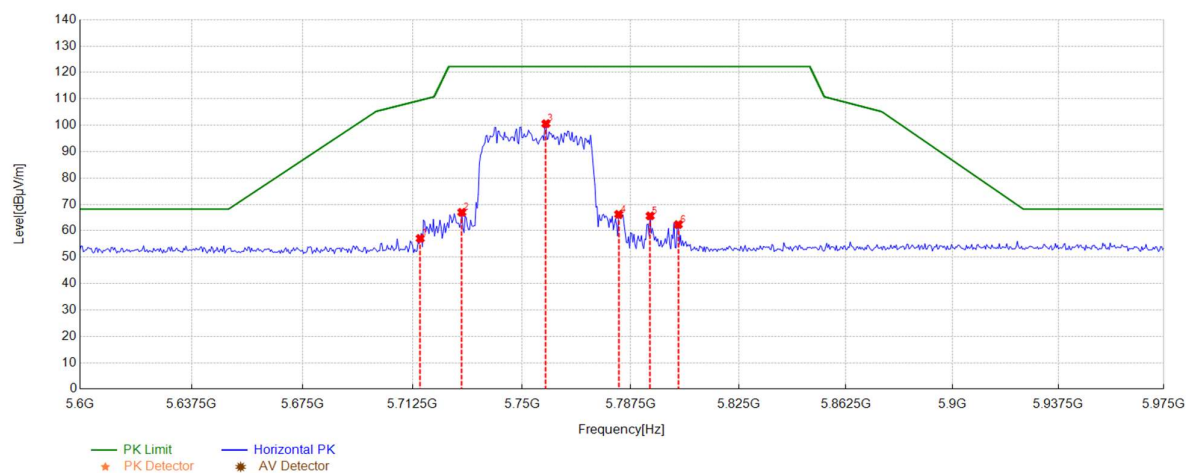

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5715.12	57.11	14.91	109.44	52.33	150	304	Horizontal
2	5729.37	67.01	14.87	122.20	55.19	150	348	Horizontal
3	5758.25	100.59	14.79	122.20	21.61	150	349	Horizontal
4	5783.37	66.25	14.71	122.20	55.95	150	349	Horizontal
5	5794.25	65.65	14.68	122.20	56.55	150	77	Horizontal
6	5804	62.36	14.68	122.20	59.84	150	350	Horizontal

Mode: AX40-5755

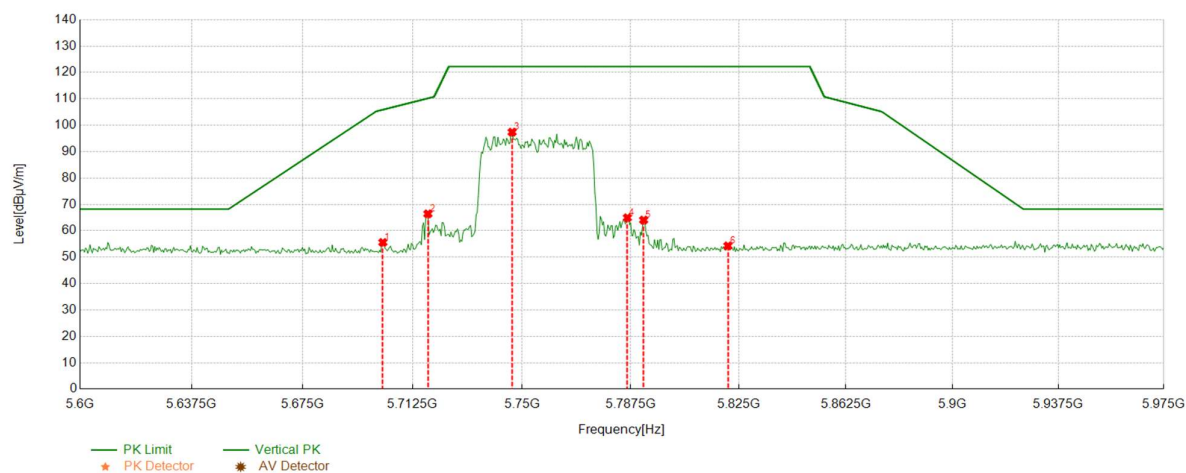

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5702.37	55.60	14.95	105.87	50.27	150	168	Vertical
2	5717.75	66.43	14.91	110.17	43.74	150	287	Vertical
3	5746.62	97.39	14.82	122.20	24.81	150	18	Vertical
4	5786.37	64.95	14.70	122.20	57.25	150	8	Vertical
5	5792	64.09	14.68	122.20	58.11	150	336	Vertical
6	5821.25	54.29	14.73	122.20	67.91	150	18	Vertical

Mode:	AX80-5210
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	50.90	74.00	23.10	46.79	54.00	7.21	150	342	Horizontal	PASS
2	4905.6	14.32	53.41	74.00	20.59	48.56	54.00	5.44	150	271	Horizontal	PASS
3	4954.35	14.29	53.51	74.00	20.49	47.67	54.00	6.33	150	271	Horizontal	PASS
4	5082.4	14.35	53.96	74.00	20.04	49.18	54.00	4.82	150	345	Horizontal	PASS
5	5128.55	15.37	55.31	74.00	18.69	48.50	54.00	5.50	150	35	Horizontal	PASS
6	5150	16.89	53.23	74.00	20.77	47.02	54.00	6.98	150	4	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500	12.97	50.52	74.00	23.48	45.75	54.00	8.25	150	226	Vertical	PASS
2	4943.95	14.30	53.27	74.00	20.73	50.00	54.00	4.00	150	318	Vertical	PASS
3	4979.7	14.28	53.47	74.00	20.53	47.16	54.00	6.84	150	107	Vertical	PASS
4	5044.7	14.28	53.99	74.00	20.01	50.07	54.00	3.93	150	160	Vertical	PASS
5	5138.95	15.73	53.97	74.00	20.03	50.01	54.00	3.99	150	41	Vertical	PASS
6	5150	16.89	52.27	74.00	21.73	49.50	54.00	4.50	150	24	Vertical	PASS

Mode:	AX80-5290
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.03	68.23	20.20	45.66	54.00	8.34	150	187	Horizontal	PASS
2	5367.52	18.59	53.89	74.00	20.11	50.30	54.00	3.70	150	82	Horizontal	PASS
3	5377.36	18.45	54.80	74.00	19.20	49.35	54.00	4.65	150	60	Horizontal	PASS
4	5381.68	18.40	55.21	74.00	18.79	46.82	54.00	7.18	150	77	Horizontal	PASS
5	5388.4	18.32	54.72	74.00	19.28	50.92	54.00	3.08	150	43	Horizontal	PASS
6	5460	18.03	47.56	74.00	26.44	44.13	54.00	9.87	150	50	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	19.23	48.64	68.23	19.59	46.38	54.00	7.62	150	286	Vertical	PASS
2	5377.84	18.45	50.01	74.00	23.99	48.71	54.00	5.29	150	294	Vertical	PASS
3	5386.12	18.34	53.12	74.00	20.88	44.06	54.00	9.94	150	328	Vertical	PASS
4	5388.76	18.31	51.82	74.00	22.18	46.98	54.00	7.02	150	241	Vertical	PASS
5	5414.68	18.13	47.52	74.00	26.48	44.74	54.00	9.26	150	203	Vertical	PASS
6	5460	18.03	47.15	74.00	26.85	45.23	54.00	8.77	150	161	Vertical	PASS

Mode:	AX80-5530
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	46.54	68.23	21.69	44.04	54.00	9.96	150	201	Horizontal	PASS
2	5430.88	18.97	51.83	74.00	22.17	44.89	54.00	9.11	150	336	Horizontal	PASS
3	5437.72	19.10	52.09	74.00	21.91	48.28	54.00	5.72	150	318	Horizontal	PASS
4	5443	19.19	52.87	74.00	21.13	47.65	54.00	6.35	150	354	Horizontal	PASS
5	5449.24	19.31	50.98	74.00	23.02	47.62	54.00	6.38	150	153	Horizontal	PASS
6	5460	19.51	50.90	74.00	23.10	45.00	54.00	9.00	150	4	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350	17.87	47.41	68.23	20.82	45.34	54.00	8.66	150	290	Vertical	PASS
2	5431.72	18.98	55.85	74.00	18.15	49.45	54.00	4.55	150	240	Vertical	PASS
3	5434.96	19.04	53.51	74.00	20.49	49.78	54.00	4.22	150	235	Vertical	PASS
4	5447.08	19.27	52.91	74.00	21.09	49.80	54.00	4.20	150	356	Vertical	PASS
5	5459.68	19.50	51.56	74.00	22.44	47.50	54.00	6.50	150	186	Vertical	PASS
6	5460	19.51	48.31	74.00	25.69	44.93	54.00	9.07	150	254	Vertical	PASS

Mode: AX80-5775

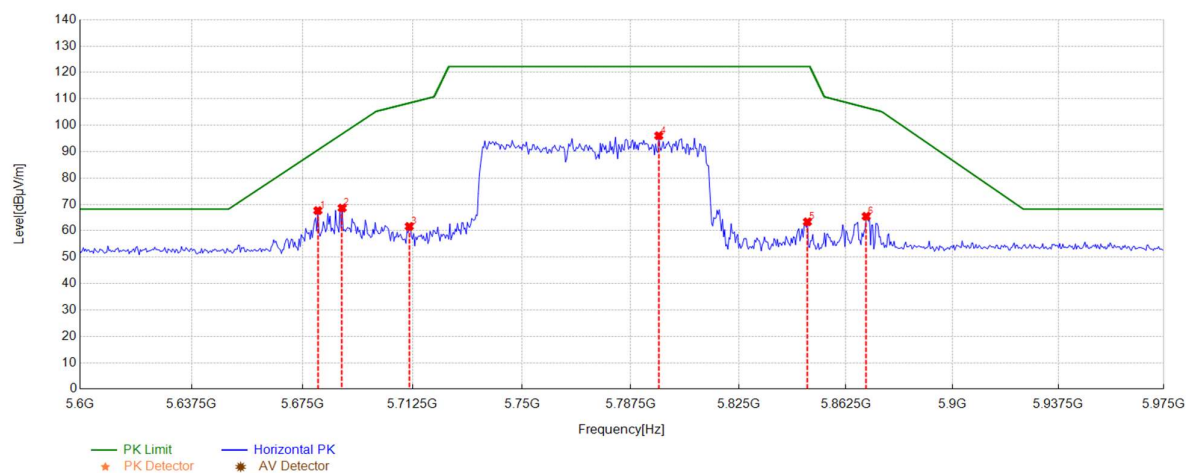


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5680.25	67.67	14.93	90.64	22.97	150	61	Horizontal
2	5688.5	68.64	14.94	96.73	28.09	150	5	Horizontal
3	5711.37	61.66	14.93	108.39	46.73	150	23	Horizontal
4	5797.25	96.04	14.67	122.20	26.16	150	3	Horizontal
5	5849	63.39	14.83	122.20	58.81	150	342	Horizontal
6	5869.62	65.50	14.94	106.70	41.20	150	330	Horizontal

Mode: AX80-5775

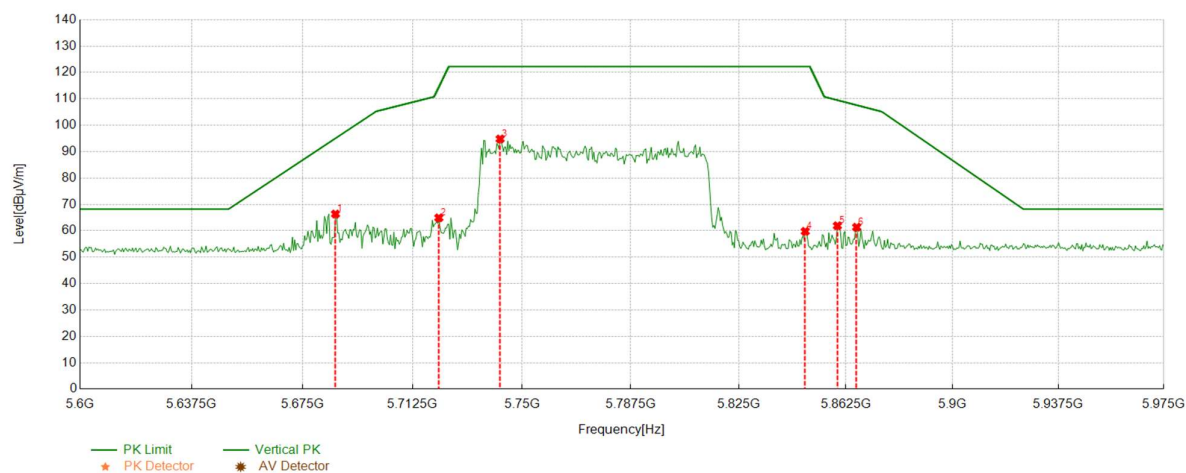


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5686.25	66.37	14.94	95.07	28.70	150	334	Vertical
2	5721.5	64.93	14.90	114.22	49.29	150	21	Vertical
3	5742.5	94.81	14.83	122.20	27.39	150	21	Vertical
4	5848.25	59.80	14.83	122.20	62.40	150	352	Vertical
5	5859.5	61.91	14.89	109.54	47.63	150	10	Vertical
6	5866.25	61.36	14.93	107.65	46.29	150	116	Vertical

Appendix B: Conducted Emission

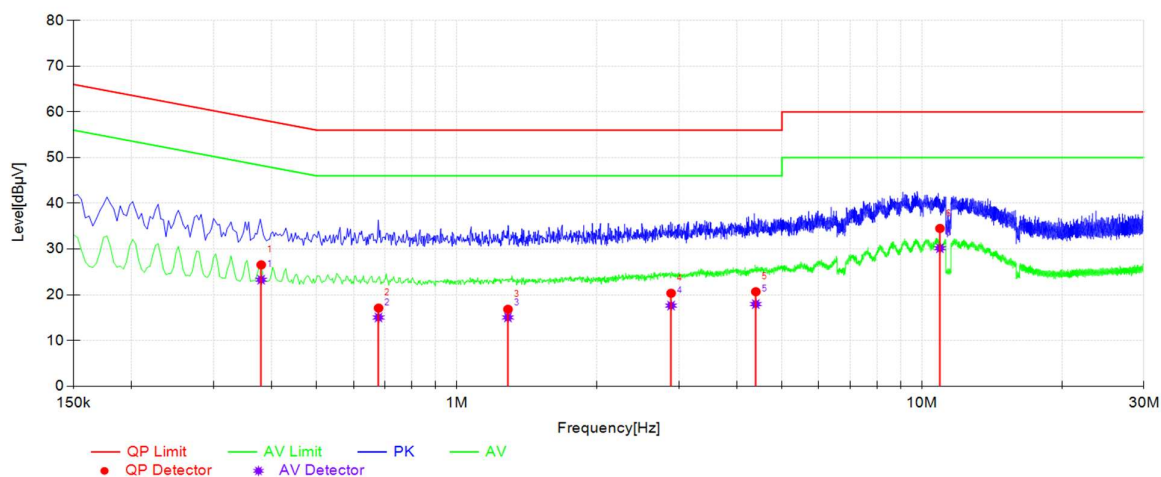

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Type	Verdict
1	0.3797	10.25	26.55	58.29	31.74	23.29	48.29	25.00	L1	PASS
2	0.6789	10.26	17.10	56.00	38.90	15.04	46.00	30.96	L1	PASS
3	1.2882	10.27	16.84	56.00	39.16	15.05	46.00	30.95	L1	PASS
4	2.8889	10.29	20.34	56.00	35.66	17.64	46.00	28.36	L1	PASS
5	4.3935	10.31	20.68	56.00	35.32	17.97	46.00	28.03	L1	PASS
6	10.9338	10.46	34.51	60.00	25.49	30.18	50.00	19.82	L1	PASS

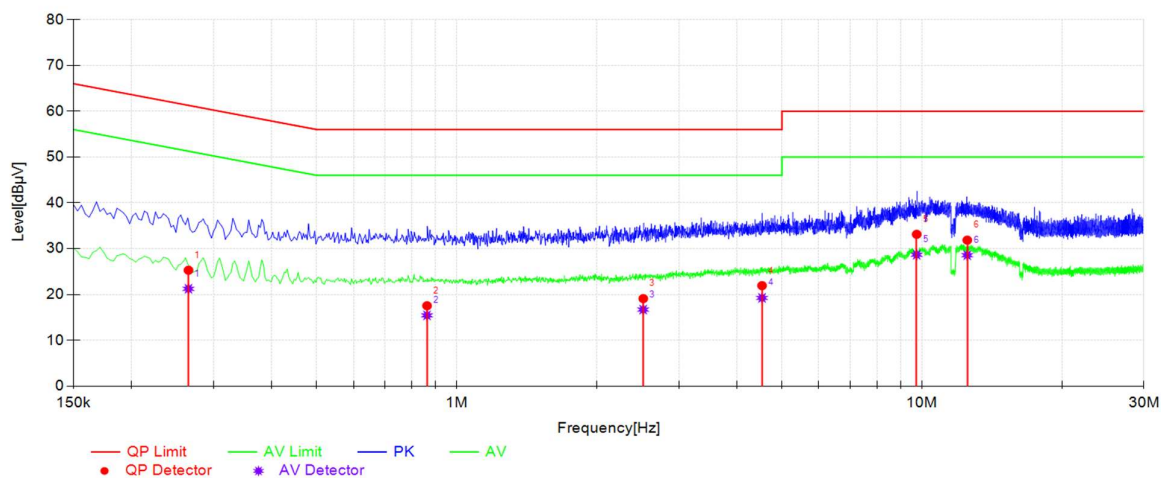

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Type	Verdict
1	0.2649	10.25	25.30	61.28	35.98	21.25	51.28	30.03	N	PASS
2	0.8629	10.26	17.55	56.00	38.45	15.45	46.00	30.55	N	PASS
3	2.5162	10.32	19.11	56.00	36.89	16.71	46.00	29.29	N	PASS
4	4.5311	10.40	21.94	56.00	34.06	19.26	46.00	26.74	N	PASS
5	9.7431	10.44	33.14	60.00	26.86	28.68	50.00	21.32	N	PASS
6	12.5160	10.50	31.87	60.00	28.13	28.58	50.00	21.42	N	PASS