



DE

FR

EN

ES

IT

JP

RU

KR

V8S User Guide

GROUP INTERCOM HELMET BLUETOOTH HEADSET

Voice Assistant

Music sharing

Fleet Communication

Simultaneous Connection
of Multiple Devices

Continuous background music, not
interrupted by any communication



Note: Please check whether the products in the kit are complete according to the packing list



Ins:VIMOTO2011

Follow our official account
for more information



Tik tok:VIMOTO2011

Follow our official account
for more information

Table of Contents

1. Packing List	01
2. Installation Instructions	02
2.1 Headphone Installation Instructions	02
2.2 Face Plate replacement Instructions	02
2.3 Half Face Helmet	03
2.4 Full Face Helmet	04
3. Product Introduction	05
4. Light Indicator Description	06
5. Operating Instructions	07
5.1 Basic Function	07
5.2 Phone Functions	11
5.3 Music Function	14
5.4 Bluetooth Intercom	16
6. Product Specifications	18

1. Packing List




V8S Intercom X 1



User Manual X 1



Packing Box X1




Headphone Set X1



Headphone Velcro X2




Headphone Heightening Pad x2



Adhesive Bracket x1




Bracket Sticker x1




Clip Bracket x1




Hard Microphone x1



Hard-mic sponge x2




Hard-mic Velcro x1




Soft Microphone x1




Soft-mic Velcro x1




Decorative Face Plate x2




Tape for Face Plate (short x3 long x6)



Steel Needle x1



Type-C Charging Cable x1



Alcohol Cotton x1



Wipe Cloth x1


2. Installation Instructions

2.1 Headphone Installation Instructions

1. Clamp the fixture bracket to the helmet




2. Install the device into fixture bracket

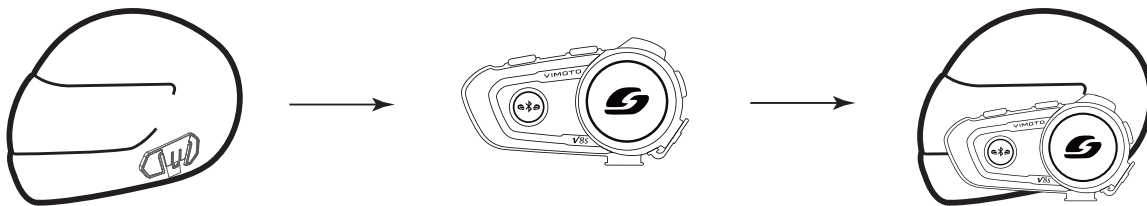


2.2 Face Plate replacement Instructions

Insert the Steel Needle into the opening to remove the face plate , Apply tape to the Another Face Plate , Align the position and press firmly

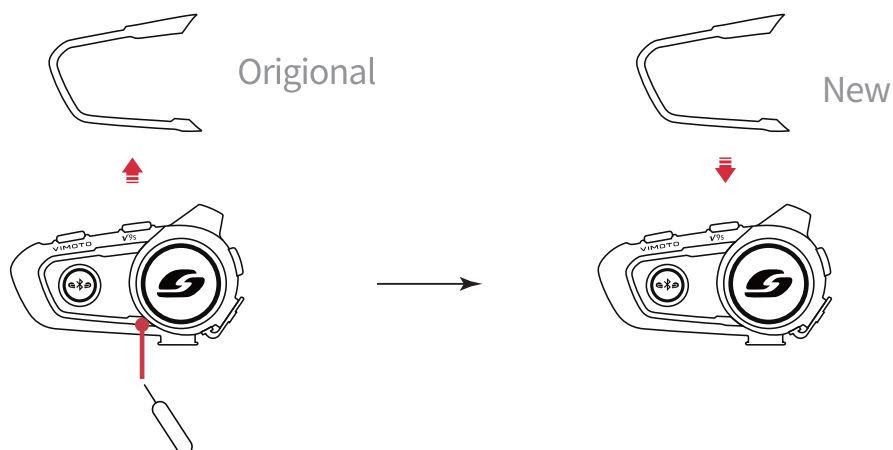


2.3 Half Face Helmet

1. Apply 3M tape to the inside of the helmet, align position to the ear. Stick the headphone to position

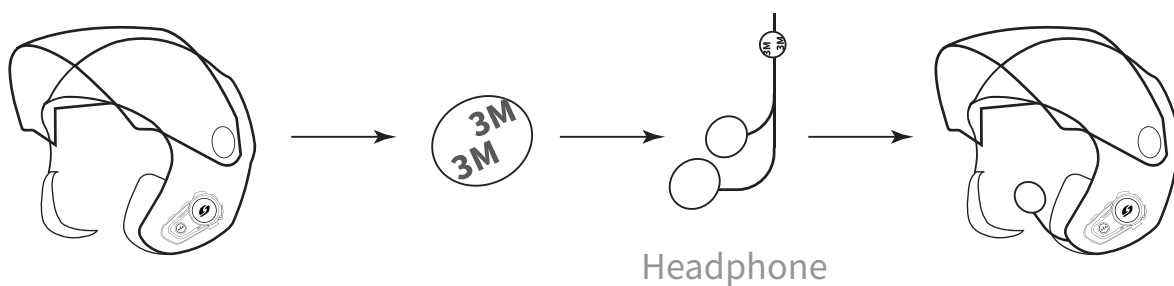


2. Attach the 3M tape to the left side of the helmet and fix the microphone

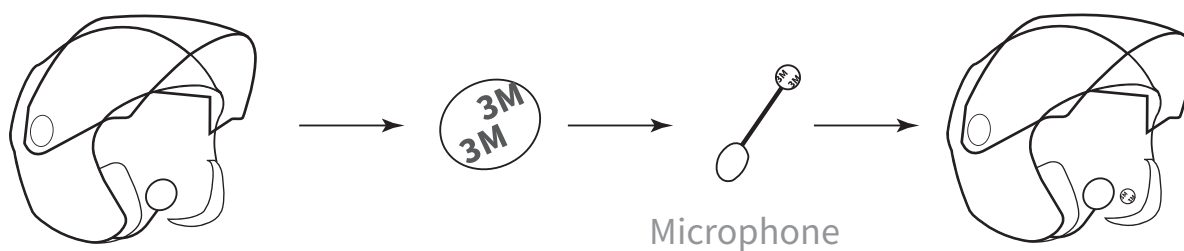

3. Confirm the location of the microphone - keep it 1-2 cm from your mouth




4. Plug in headphones cable to device

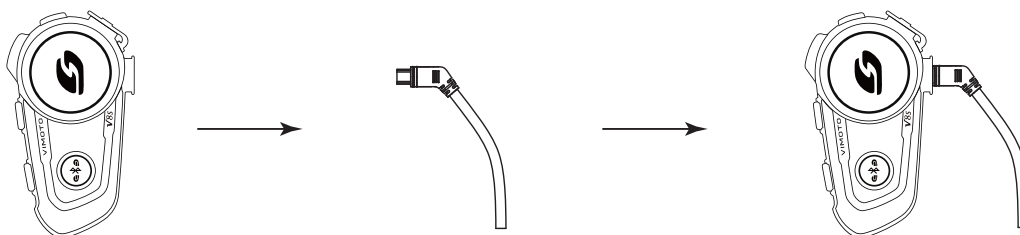


2. 4 Full Face Helmet


1. Apply 3M tape to the inside of the helmet, align position to the ear. Stick the headphone to position

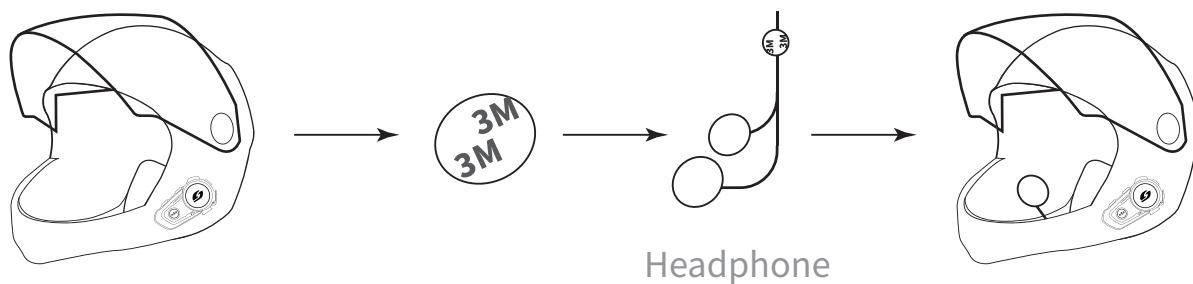


2. Apply 3M tape to the helmet and fix the microphone

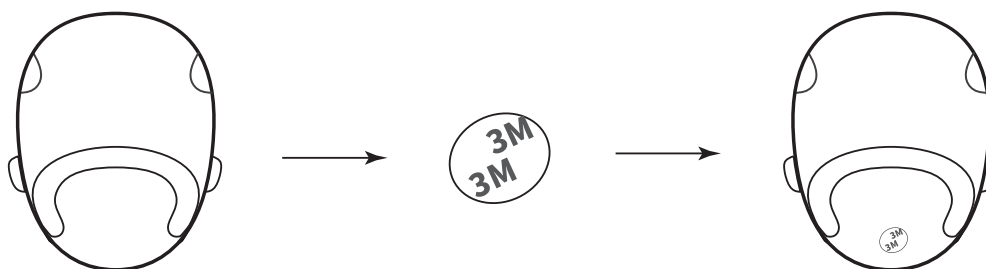


3. Confirm the location of the microphone - keep it 1-2 cm from your mouth

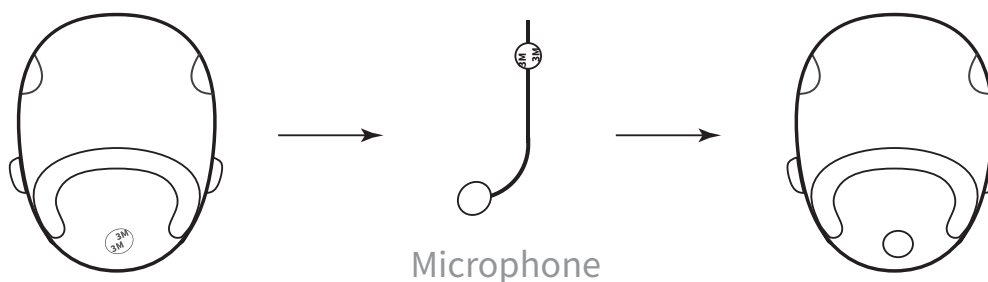

4. Plug in headphones cable to device

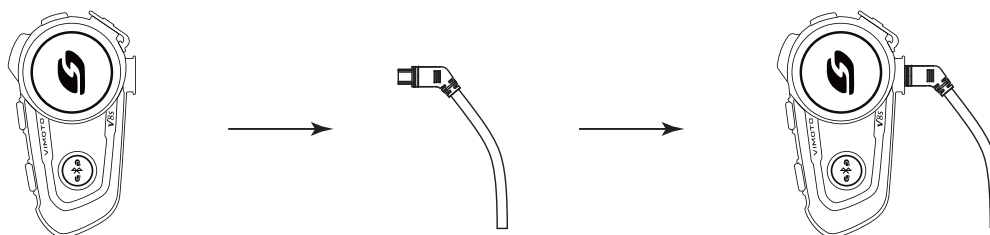

3. Product Introduction

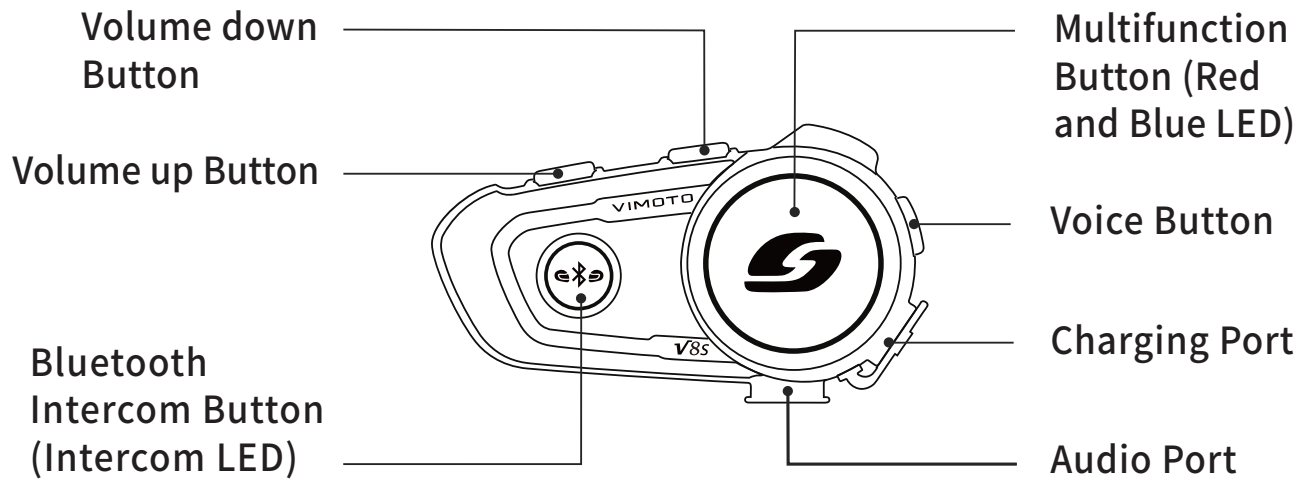

Important:

Before installing your headset, please connect the phone according to the Pocket Guide, and listen to the sound effects and volume. If there is a big difference in sound and volume when installed on the helmet, adjust the position of the speaker inside the helmet.


4. Light Indicator Description



Pairing

(Including mobile, the controller, the adapter)

Red and blue lights flash alternately



The device is standby and no connection

The blue lights flashes slowly
(Switch to red light when the above power is low)

Dialing

The blue light is flashing
(Switch to red light when the above power is low)

The Connected

Blue light double flash
(Switch to red light when the above power is low)

(Mobile phone/ the controller/wireless interphone connection)

Three flashes of blue light
(Switch to red light when the above power is low)

Calling



Paring in dual user mode

Red and blue lights flash alternately+intercom indicator lights flash



Bluetooth intercoming
(Double user)

Intercom indicator light flashes slowly



Charging

The red light is always on



Charging Completed


The red light out

5. Operating Instructions

5.1 Basic Function

Power on/off

► Power on




Power on prompt



Blue lights flashing

► Power off




Power off prompt



The red light out

Restore the factory setting

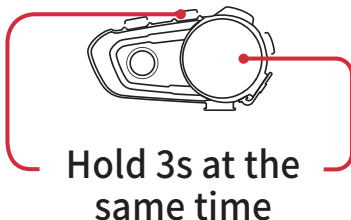

Factory Data
Reset,
Power Off



The red and blue
lights are on for
2s at the same time



Power off
prompt




The red
light out

(It will shut down automatically after restoring the factory settings)

Pairing and connecting

► Pairing(when power is on)



Hold 3s




🔊 “Pairing”
(When powering on
and not on a call)



Status LED flash
alternately

1 Pairing with a cell phone




In pairing
(Device)

Pairing



Bluetooth
search pairing
(Mobile phone)

► Cancel pairing



In the paired state,
press and hold 3s



🔊 Unpairing




Blue lights flashing

Reconnection

► Automatic reconnection

When the machine is turned on, device will be automatically reconnected

► Pairing(when power is on)



Press




The mobile phone
connection is
completed



The blue indicator
flashes twice every 4s

The mode switch



Double Click



(Bluetooth intercom)



(Intercom)

Battery level

► Automatic reconnection

Power on automatically plays "battery level X%".

► Low power prompt



When the
battery power is
lower than 15%



🔊 "Low battery, please charge"
(Will be played every 30s)



Charging



When the
battery power is
lower than 5%



🔊 "Low power, about to shut down"
(Automatic shutdown after 10s)



Power off

5.2 Phone Functions

Make or answer call



Call and answer (When there is a call)
(} "Hi")

Answer the call



Automatic (When there is a call)
(⌚ After 5s)

Answer the call



Press (When there is a call)

Answer the call



Press and hold 1s (When there is a call)

Reject the call



Double click (Three way call)

Call switching



Press (On the line)

End the call



Double click



(In non-call mode)



Call the last
phone number



Press




(When calling)



Cancel call

Turn on/off auto answer




Hold 1s at the
same time



 Auto Accept On



Open



Hold 1s at the
same time




 Auto Accept Off



Shut down

Start/cancel smart Voice




Press



(No phone calls)



Start



Press




(Voice dialing)



Cancel

Mic mute




Press and hold 1s



🔊 “Microphone on”
(When the microphone
is silent)



Turn on



Press and hold 1s




🔊 “Microphone is muted”
(When the microphone
is turned on)



Turn off

Volume control



Short press



(In the call)



Volume Up



Short press



(In the call)



Volume Down

5. 3 Music Function

Listen to music



Short press



(When music is paused)



Play



Short press




(When music is played)



Suspended

Switch the music




Press and hold 1s



(When music is paused)



Play the last song



Press and hold 1s




(When music is paused)



Play the next song

Volume control




Short press



(When music is played)



Volume Up



Short press




(When music is played)



Volume Down

Share the music



Double click




🔊 “Music sharing is open”
(When music is played)



Share

Note: before receiving music sharing, the receiver needs to press the key to exit the intercom



Double click



🔊 “Music Sharing
has been closed”
(Music sharing)



Cancel
the share

(To use the music sharing function, please complete bluetooth intercom pair pairing first)


5.4 Bluetooth Intercom

Bluetooth intercom mode


► Pairing of two Bluetooth headset devices

1 Pair with V9S/V9/V8S


(This step is required for both headset 1 and headset 2)

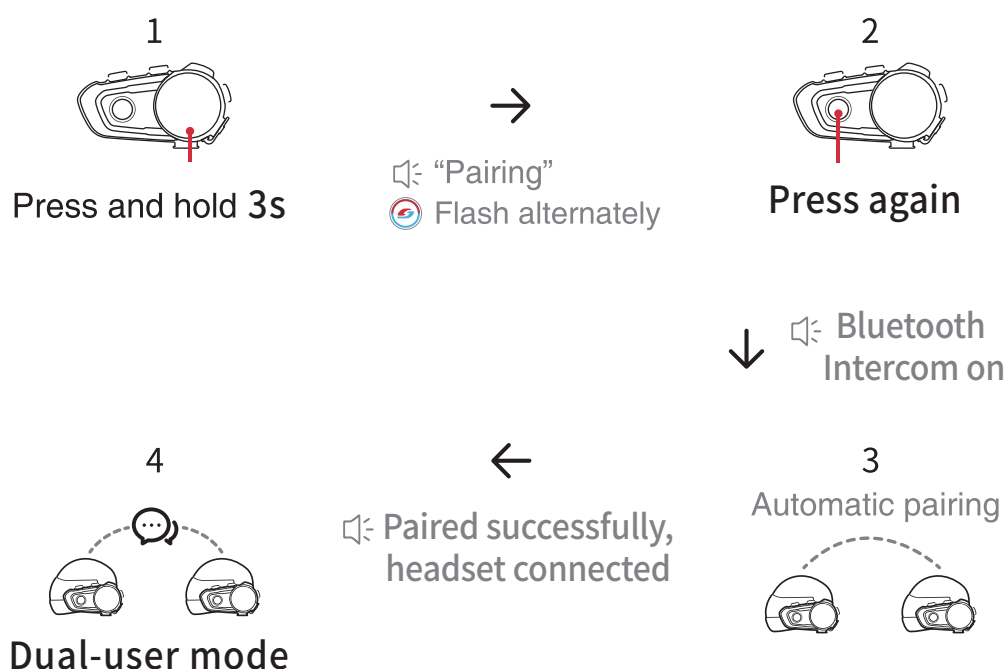

2 Cancel pairing of two Bluetooth headsets

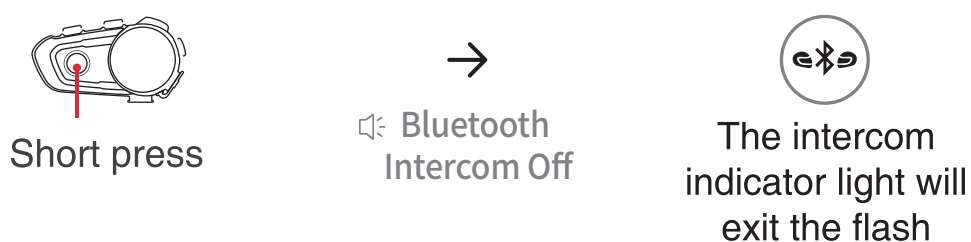

Mic mute




Press and hold 1s



🔊 “Microphone on”
(When the microphone
is silent)



Turn on



Press and hold 1s




🔊 “Microphone is muted”
(When the microphone
is turned on)



Turn off

Volume control




Short press



(Bluetooth intercom)



Volume Up



Short press



(Bluetooth intercom)



Volume Down

6. Product Specifications

Item Name	VIMOTO Intercom Bluetooth Headset
Item No	V8S
Bluetooth Version	V5.0
Product Weight	45g (\pm 5g)
Battery Capacity	1000mAh
Charging Time	\leq 2.5h
Operation Time	\geq 250hours
Standby Time	\geq 250hours
Waterproof	IP67
Intercom Toggling	4way
Maximum Number of Speakers	2
Maximum Intercom Distance	500M

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference.
- (2) this device must accept any interference received, including interference that may cause undesired operation.