

## Appendix B

### RF Test Data for BLE V5.0(BDR/EDR) (Conducted Measurement)

Product Name: PORTABLE SPEAKER

Trade Mark: Iqsound, Supersonic


Test Model: IQ-8015DJBT

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.2° C   |
| Relative Humidity: | 54.1%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Ken He    |
| Supervised by:     | Li Huan   |

#### B.1 Duty Cycle

| Test Mode | Test Channel | Ant  | Duty Cycle[%] | Verdict |
|-----------|--------------|------|---------------|---------|
| BT LE     | 2440         | Ant1 | 100           | PASS    |

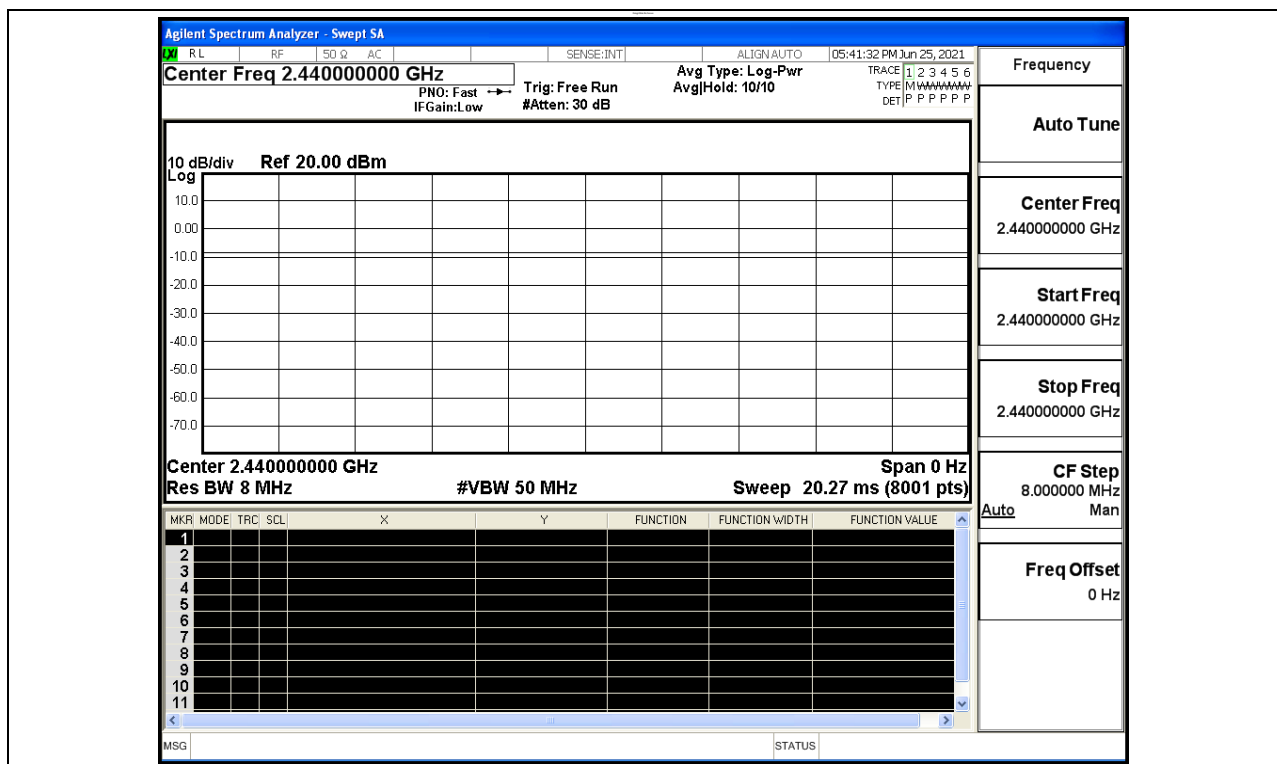


## B.2 Maximum Conducted Peak Output Power


| Mode  | Channel | Conduct Peak Power[dBm] | Limit [dBm] | Verdict |
|-------|---------|-------------------------|-------------|---------|
| BT LE | LCH     | -3.773                  | 30          | PASS    |
| BT LE | MCH     | -0.456                  | 30          | PASS    |
| BT LE | HCH     | -0.929                  | 30          | PASS    |

Test Graphs


LCH

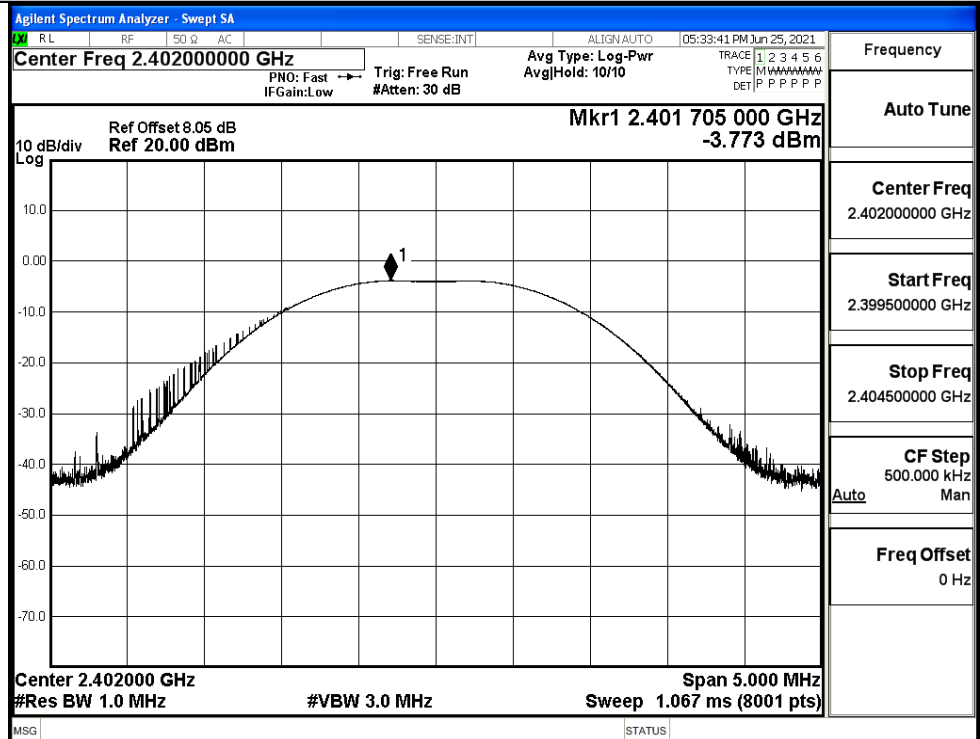

MCH

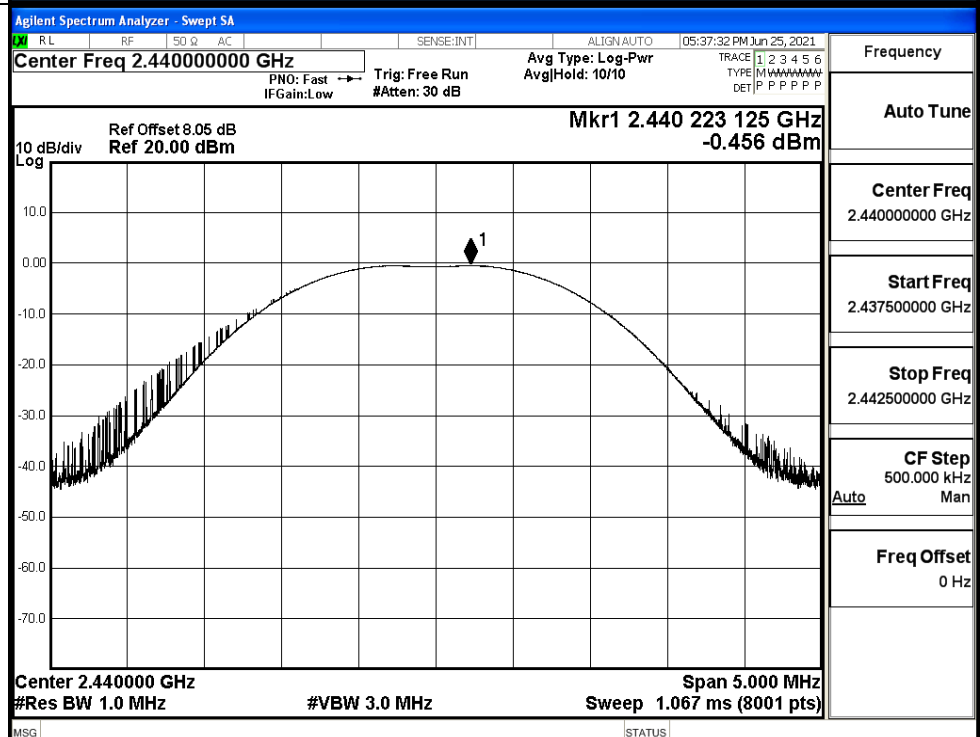

HCH

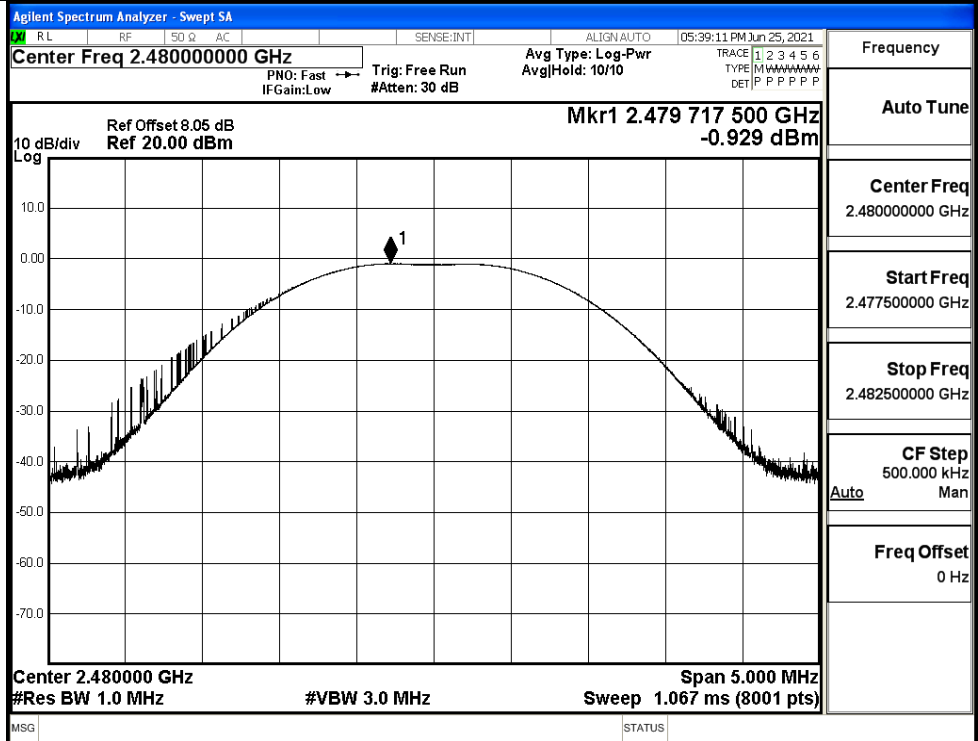


## B.3 Maximum Power Spectral Density


| Mode  | Channel | PSD [dBm/3KHz] | Limit [dBm/3KHz] | Verdict |
|-------|---------|----------------|------------------|---------|
| BT LE | LCH     | -20.053        | 8                | PASS    |
| BT LE | MCH     | -17.049        | 8                | PASS    |
| BT LE | HCH     | -17.129        | 8                | PASS    |

## Test Graphs


LCH

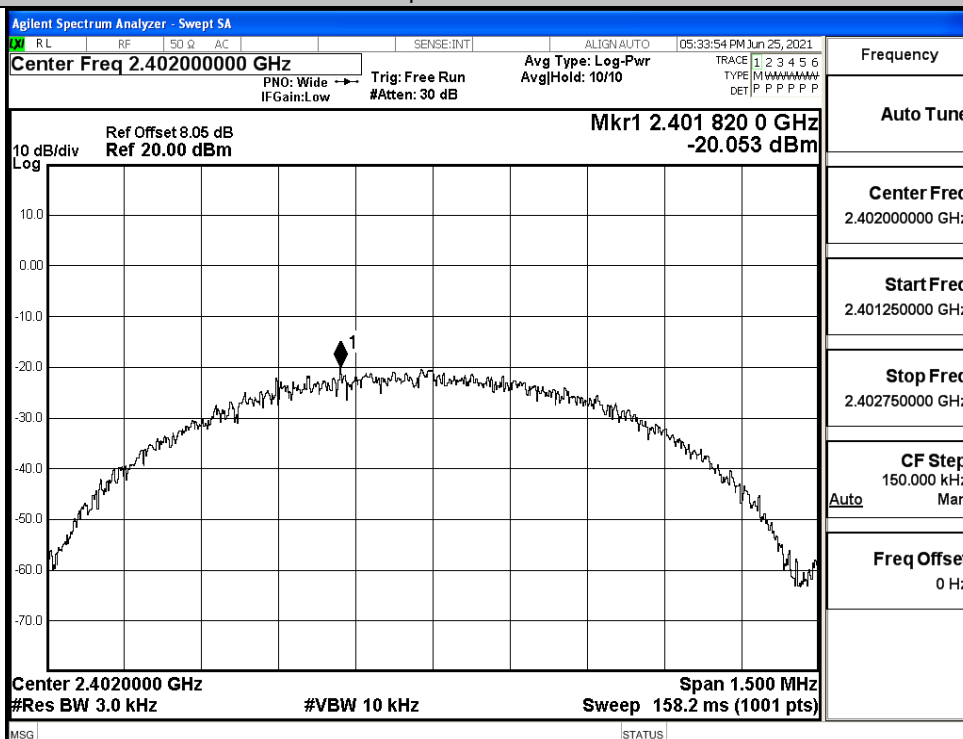

MCH

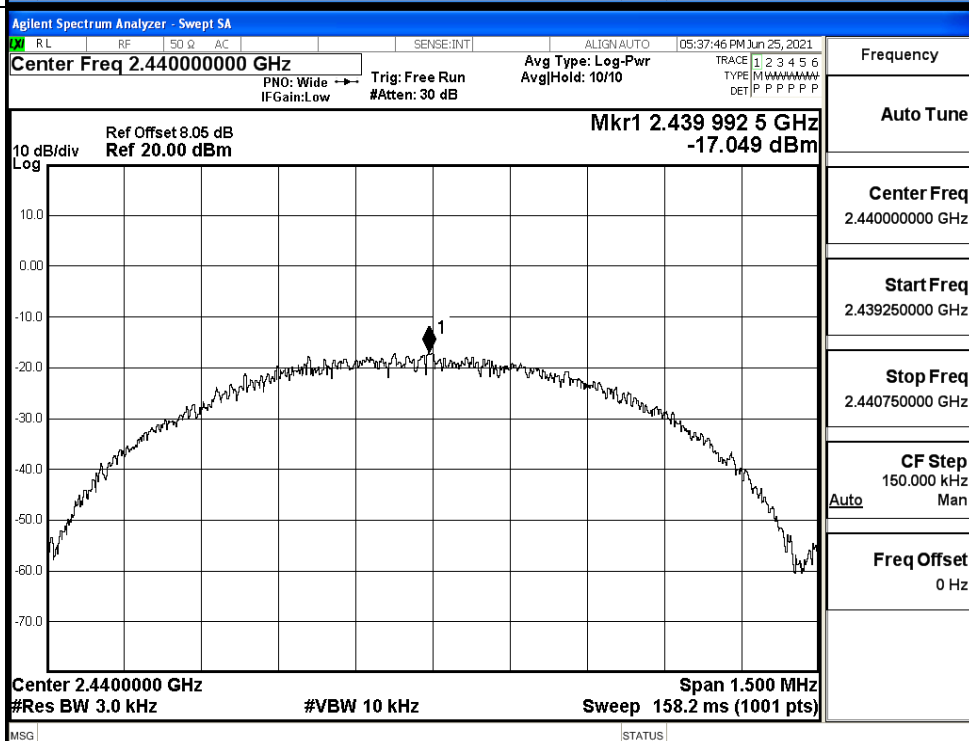

HCH

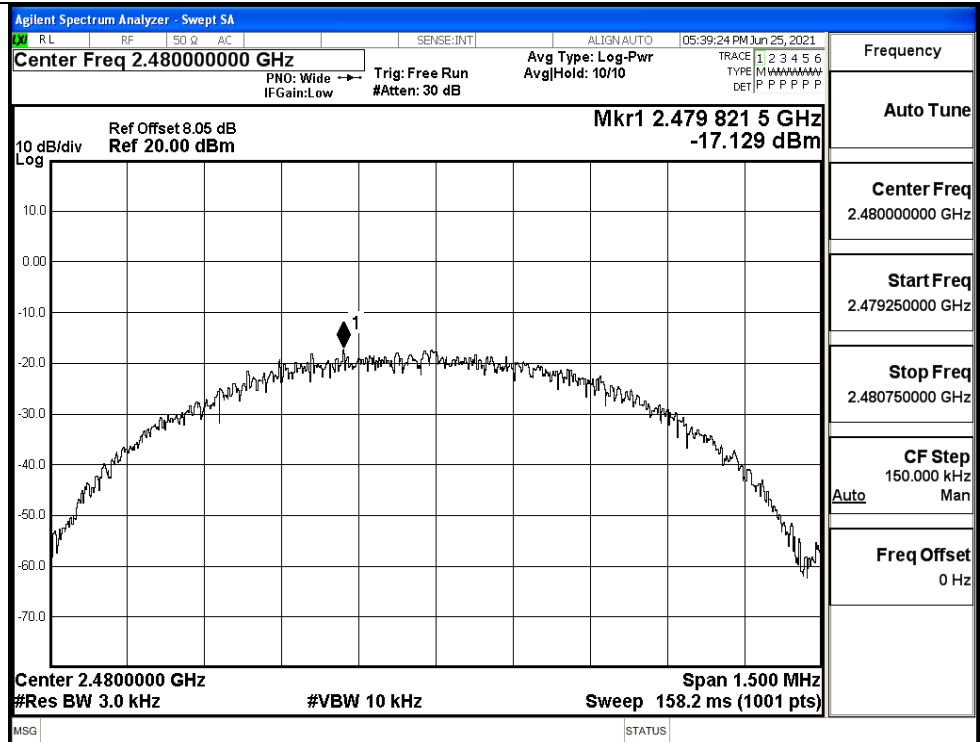


## B.4 6dB Bandwidth


| Mode  | Channel | 6dB Bandwidth [MHz] | Limit [MHz] | Verdict |
|-------|---------|---------------------|-------------|---------|
| BT LE | LCH     | 0.6652              | $\geq 0.5$  | PASS    |
| BT LE | MCH     | 0.6604              | $\geq 0.5$  | PASS    |
| BT LE | HCH     | 0.6645              | $\geq 0.5$  | PASS    |

## Test Graphs


LCH

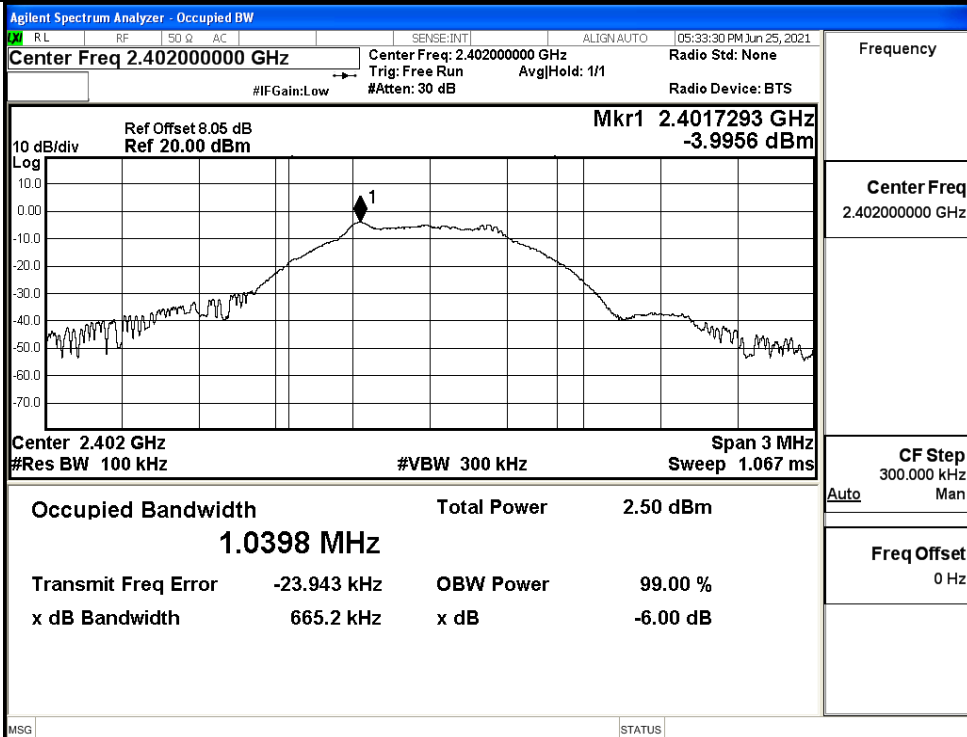

MCH

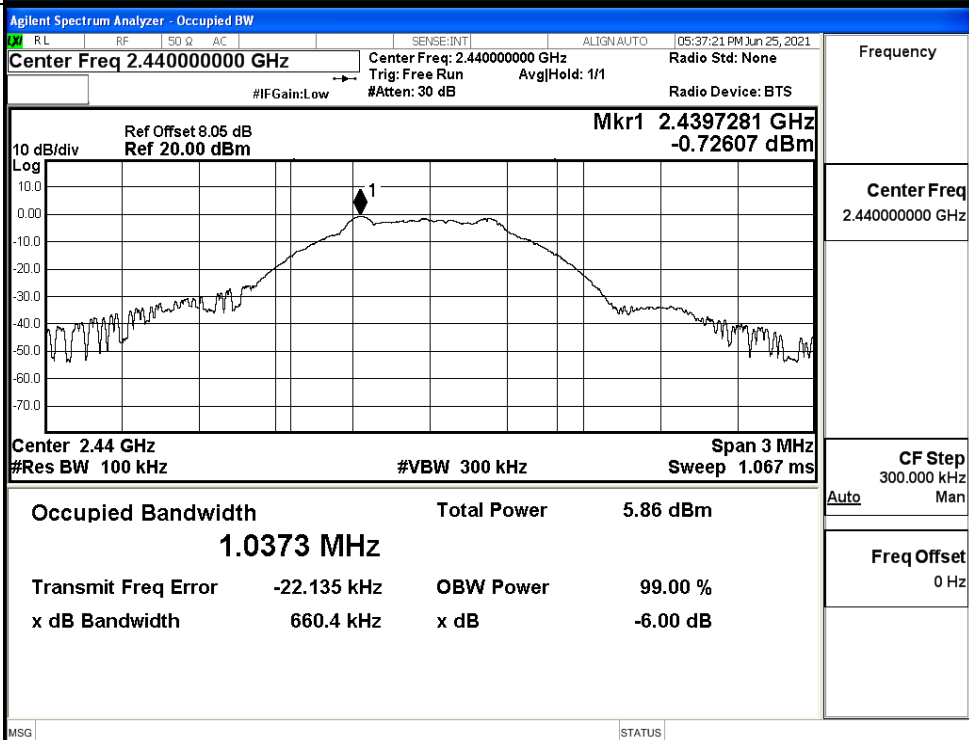


HCH

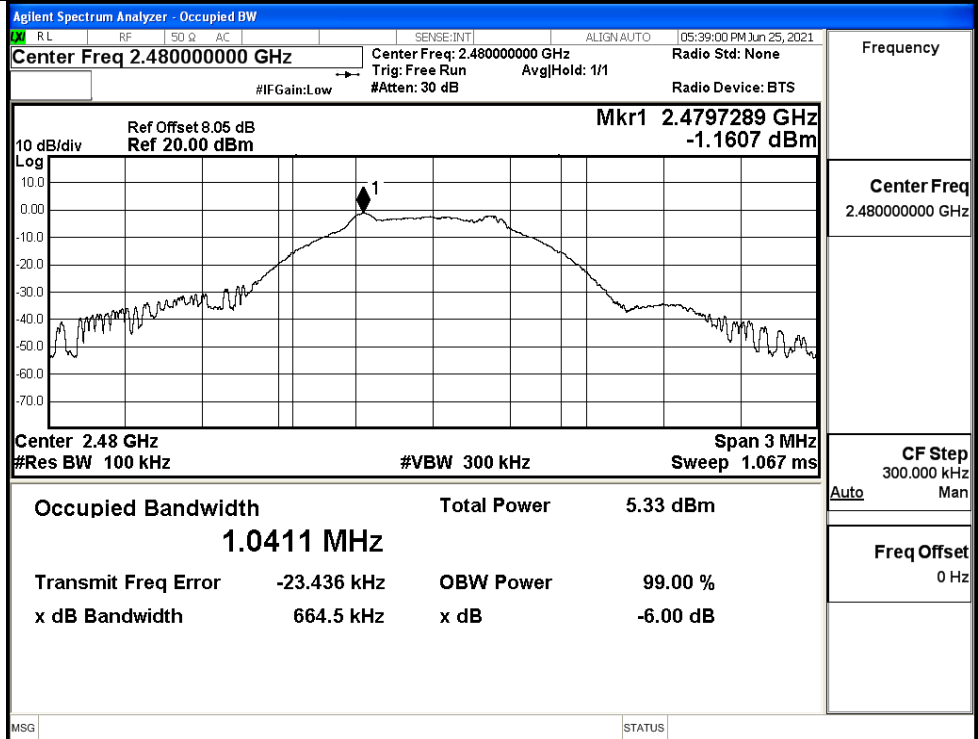

## B.6 RF Conducted Spurious Emissions

| Mode  | Channel | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-------|---------|------------|------------------|-------------|---------|
| BT LE | LCH     | -4.001     | -37.770          | -24.001     | PASS    |
| BT LE | MCH     | -0.696     | -37.043          | -20.696     | PASS    |
| BT LE | HCH     | -1.121     | -38.587          | -21.121     | PASS    |


BT LE LCH Graphs

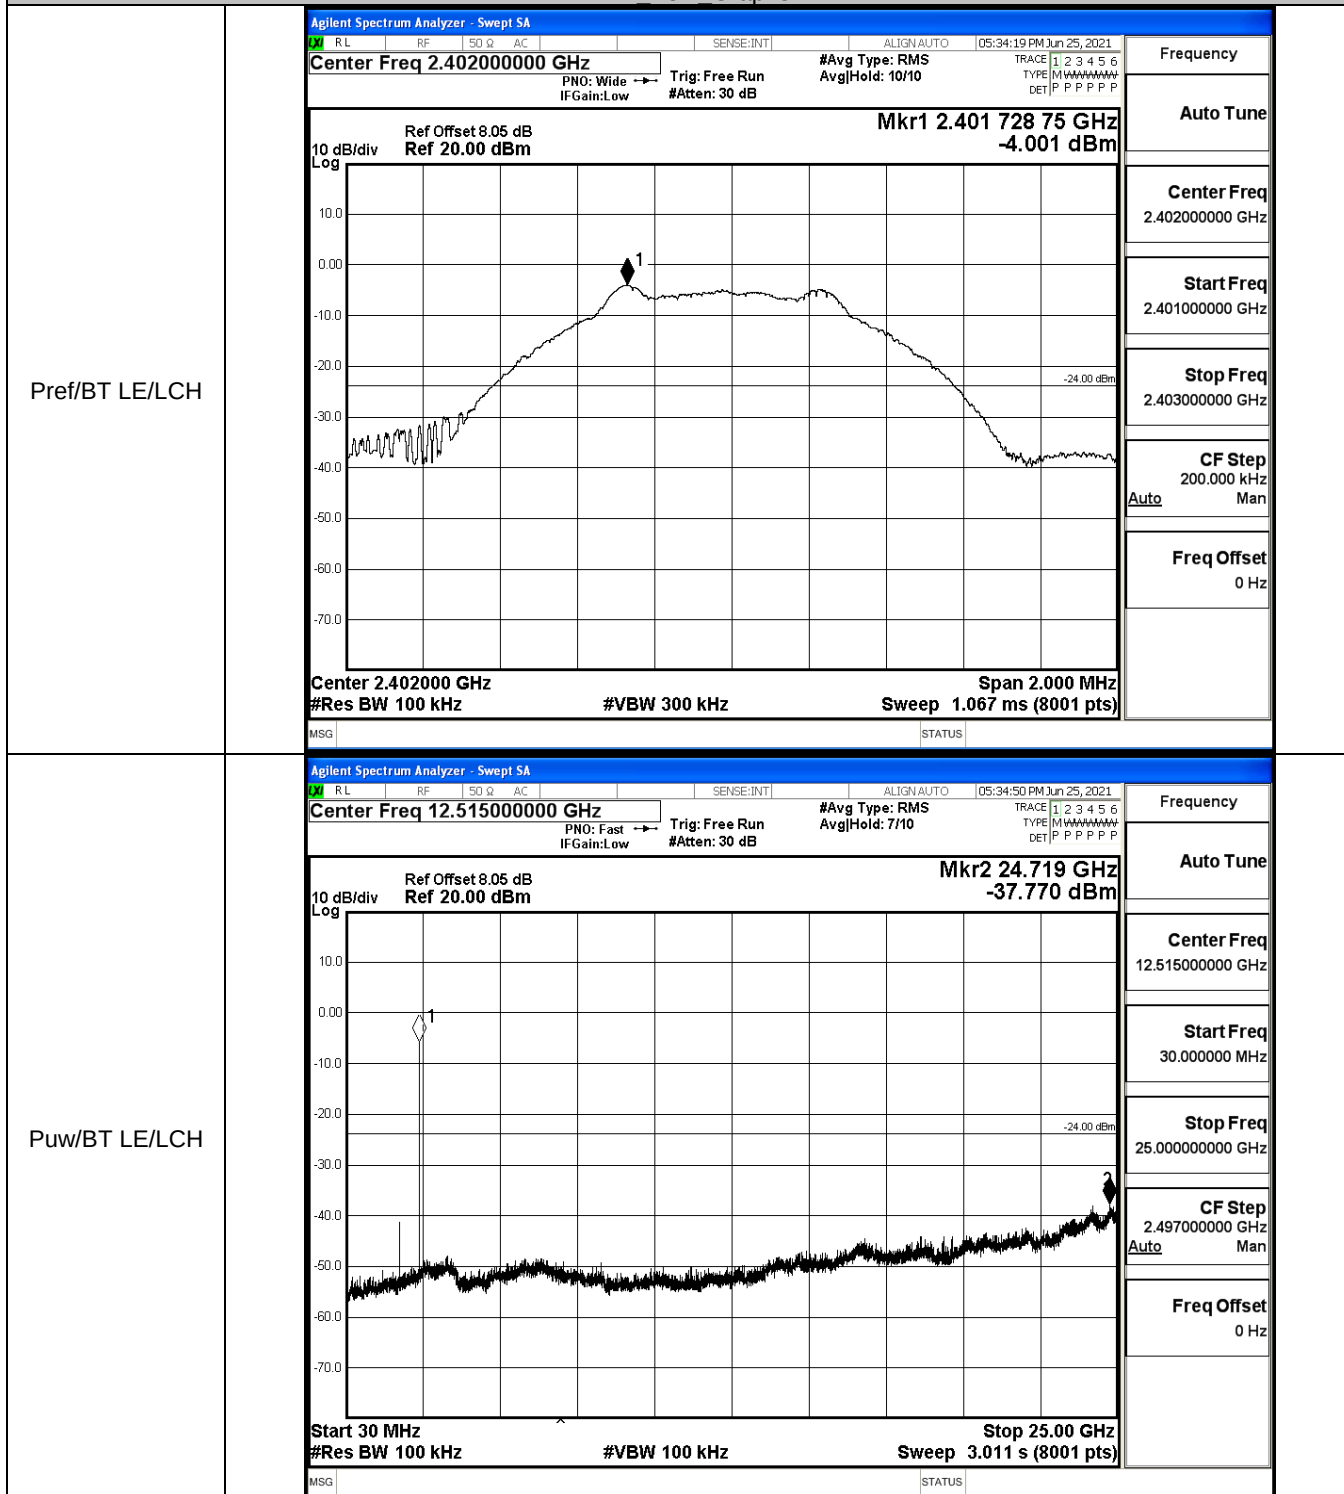




## BT LE MCH Graphs

Pref/BT LE/MCH

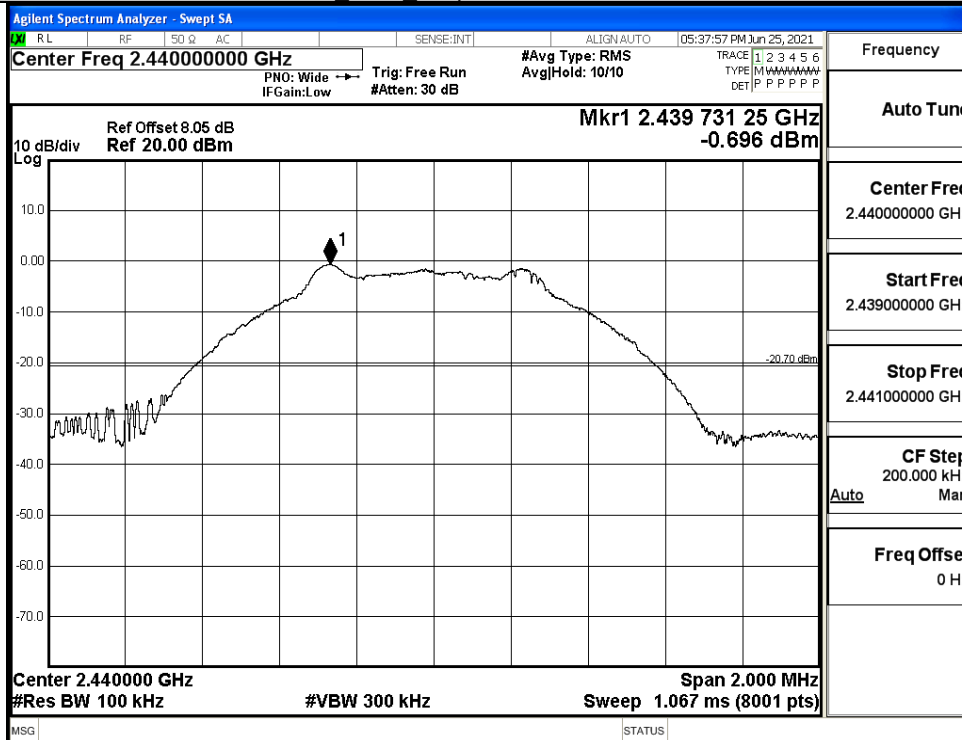


Puw/BT LE/MCH

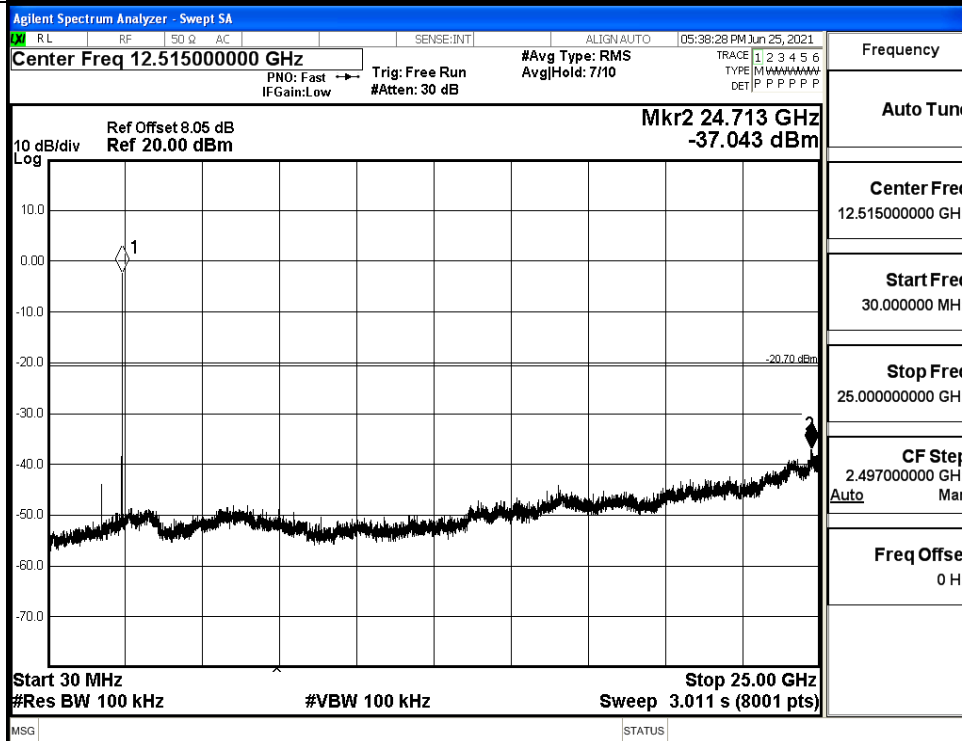

## BT LE HCH Graphs

Pref/BT LE/HCH

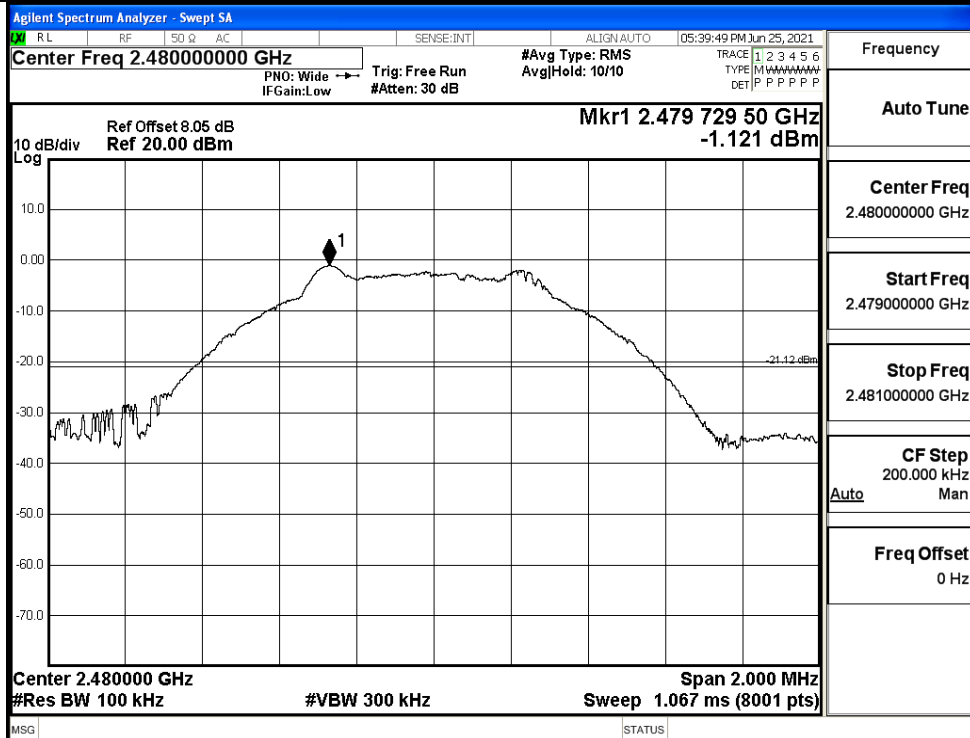

Puw/BT LE/HCH




## B.7 Band-edge for RF Conducted Emissions

| Mode  | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|-------|---------|--------------------|--------------------------|-------------|---------|
| BT LE | LCH     | -3.965             | -49.673                  | -23.97      | PASS    |
| BT LE | HCH     | -1.015             | -49.746                  | -21.02      | PASS    |

## Test Graphs

LCH

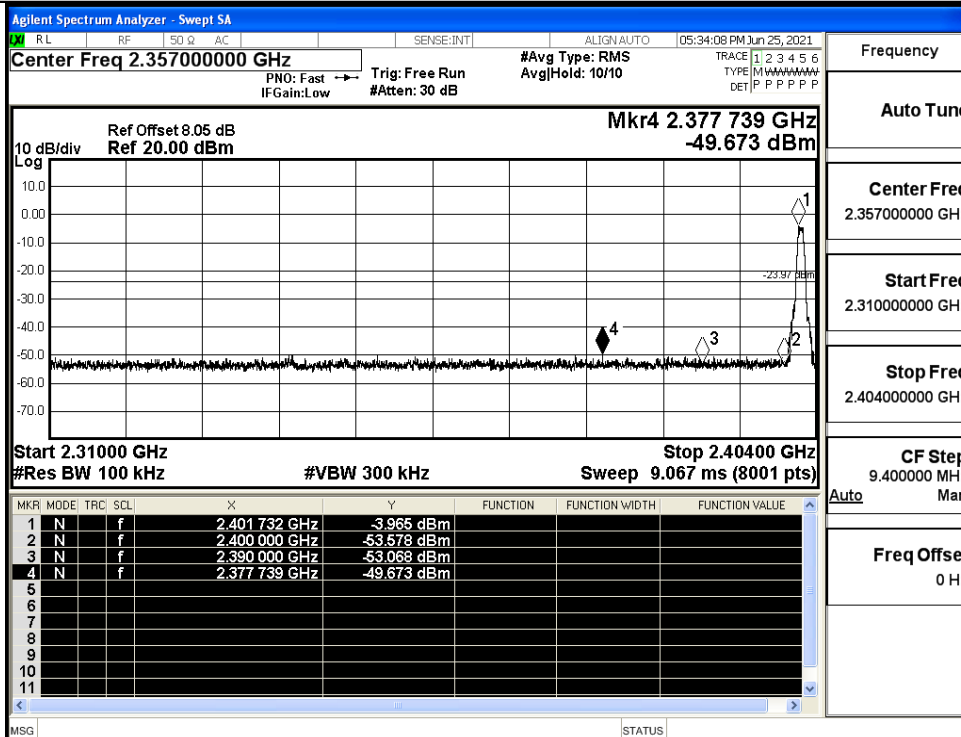

Frequency

Auto Tune

Center Freq

2.357000000 GHz

Start Freq

2.310000000 GHz

Stop Freq

2.404000000 GHz

CF Step


9.400000 MHz

Auto Man

Freq Offset

0 Hz

HCH

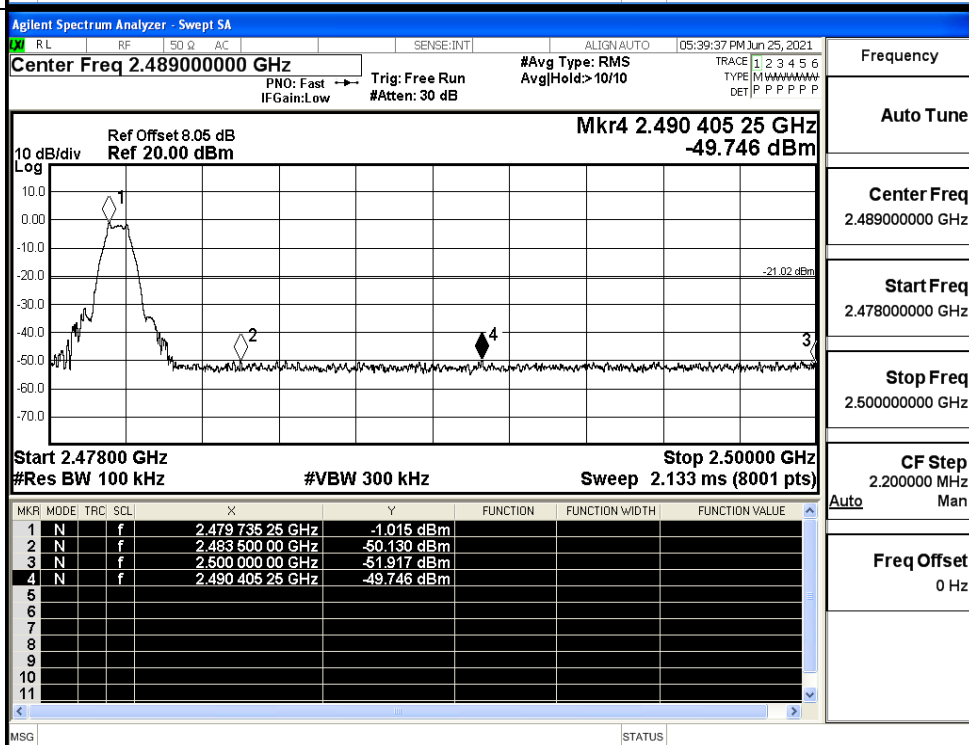

Frequency

Auto Tune

Center Freq

2.489000000 GHz

Start Freq

2.478000000 GHz

Stop Freq

2.500000000 GHz

CF Step

2.200000 MHz

Auto Man


Freq Offset

0 Hz


## B.8 Restrict-band band-edge measurements

| Test Mode | Test Channel | Ant  | Freq.  | Power [dBm] | Gain | Ground Factor | E [dBuV/m] | Detector | Limit [dBuV/m] | Verdi |
|-----------|--------------|------|--------|-------------|------|---------------|------------|----------|----------------|-------|
| BT LE     | 2402         | Ant1 | 2310.0 | -42.64      | 2.0  | 0             | 54.62      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2310.0 | -53.41      | 2.0  | 0             | 43.85      | AV       | 54             | PASS  |
|           |              | Ant1 | 2390.0 | -43.00      | 2.0  | 0             | 54.26      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2390.0 | -53.00      | 2.0  | 0             | 44.26      | AV       | 54             | PASS  |
|           | 2480         | Ant1 | 2483.5 | -42.07      | 2.0  | 0             | 55.19      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2483.5 | -52.52      | 2.0  | 0             | 44.74      | AV       | 54             | PASS  |
|           |              | Ant1 | 2500.0 | -41.13      | 2.0  | 0             | 56.13      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2500.0 | -52.44      | 2.0  | 0             | 44.82      | AV       | 54             | PASS  |


## Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

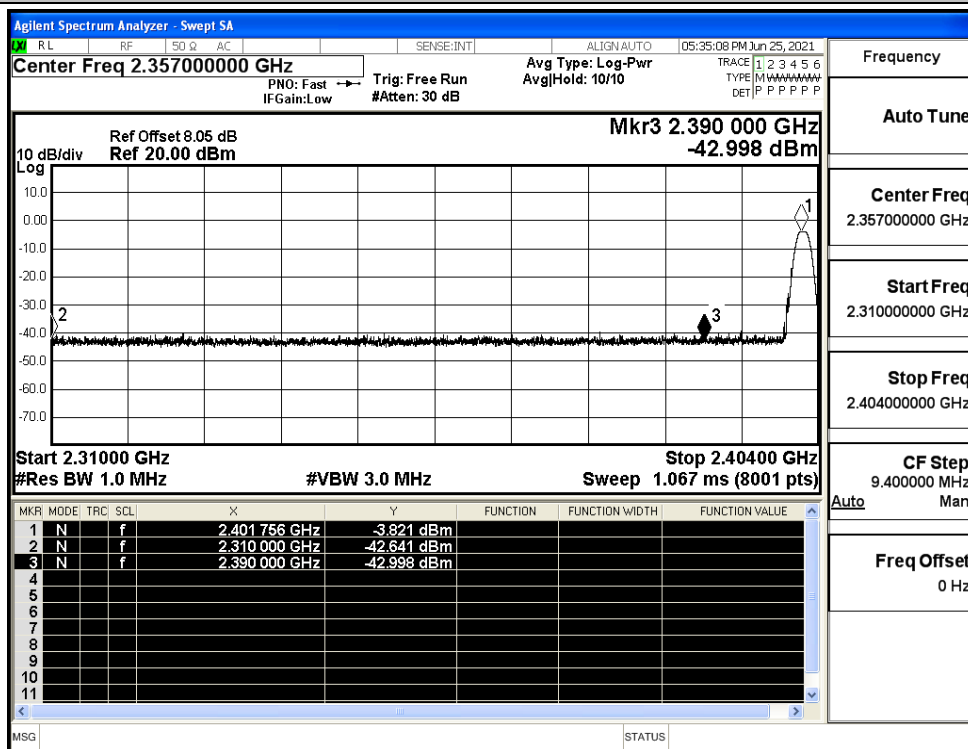

## Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

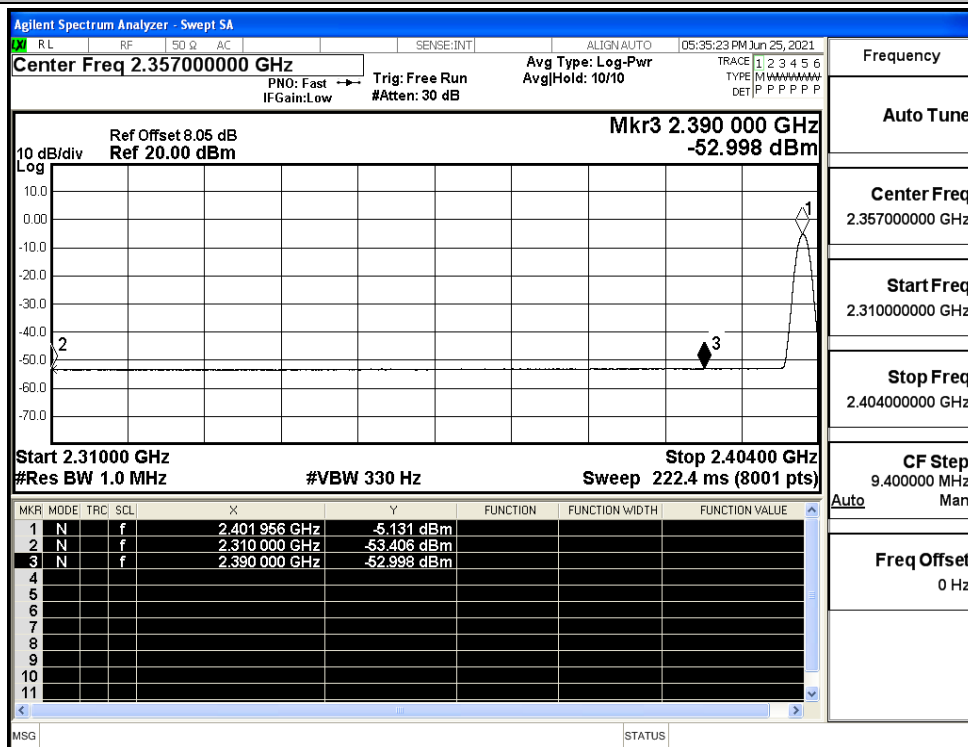

## Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

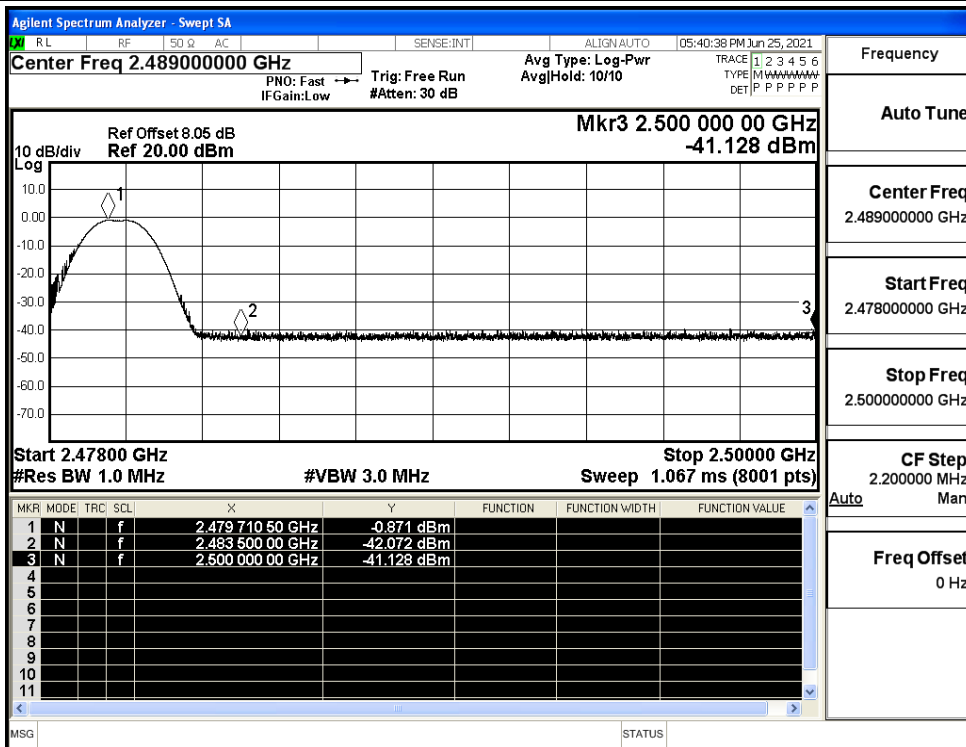

## Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

