

DESIGN

User Manual

BE-RCA Pro Wireless Music Receiver

Warranty & Customer Support

For questions, assistance, support, or warranty claims please contact us with E-mail address as follows:
contact@besign-tech.com
www.besign-tech.com

EN

Thank you for purchasing the BESIGN BE-RCA Pro Wireless Music Receiver. Please read this user manual carefully and keep it in a safe place for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

Package Contents


- BESIGN BE-RCA Pro Wireless Music Receiver
- USB Power Cable
- 3.5mm Audio Cable
- RCA Cable
- User Manual

- 02 -

EN

Product Diagram

1. Multi-function Button
2. LED Indicator
3. 3.5mm Audio Port
4. RCA Port
5. Type C Power Port
6. Power Switch (ON/OFF)

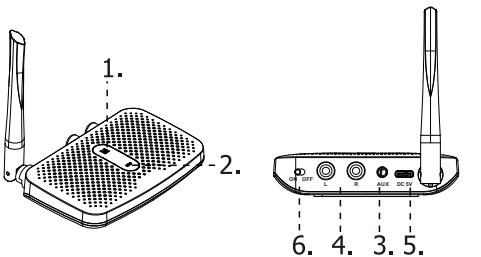

LED Indicator	Status
Flashing Red and Blue	Pairing mode
Solid Blue	Connected

- 03 -

EN

Note: Different antenna positions can affect wireless working range. Check which position gives you the best result.

Power on & Set up

Step 1. Connect the BE-RCA Pro to a power source (or compatible USB charger with 5V/500mA-2A output) via the supplied USB cable. This BE-RCA Pro does not have built-in battery.

Step 2. Connect the BE-RCA Pro to an audio input on your home music system. A.(a RCA to RCA cable is included) B.Direct connect from 3.5mm to an auxiliary input (3.5mm Audio cable is included)

Please consult your home music system's manual for more information on which connections make sense with your system.

- 04 -

EN

Turning the BE-RCA Pro Receiver On/Off

Turn on	Slide the power switch button to ON, the Blue LED indicator will stay on for 1 seconds.
Turn off	Slide the power switch button to OFF, the Red LED indicator will stay on for 1 seconds.


Note: The BE-RCA Pro adapter will enter standby mode if no connection within 15 minutes and it will keep on if you don't switch it off manually.

- 05 -

EN

Pairing

Step 1 Plug

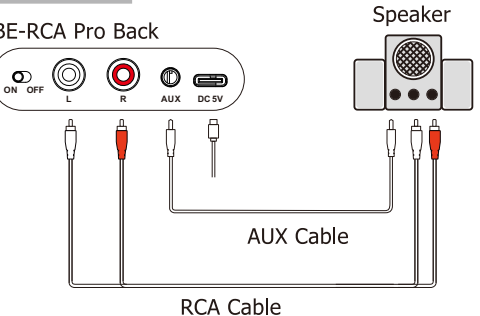


Note:No battery inside,please connect the power supply before use.

- 06 -

EN

Step 2 Pair

Blue and red led light flashing alternately.

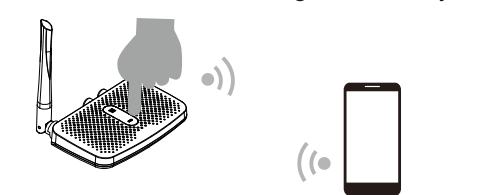


- 1.Slide the power switch button to ON position, it will enter into pairing mode automatically or double click the multifunction button when it is powered on.
- 2.Open your smart phone bluetooth setting, search"BE-RCA Pro" and connect.
- 3.The BE-RCA Pro led turn solid blue after the bluetooth connection is completed.

- 07 -

EN

Step 3 Enjoy

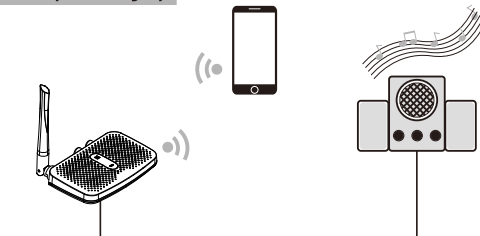

Note:

- The adapter can remember previously paired devices and will attempt to pair with devices automatically, without going into pairing mode.
- The BE-RCA Pro adapter will be automatically out of pairing mode in 15 minutes.

Pair with the second device

- 1.Follow the previous instructions in the "Pairing" section to pair the BE-RCA Pro

- 08 -

EN

- with your first device.
- 2.Once paired, disable pairing function on Device 1, the BE-RCA Pro will enter into pairing mode again.
- 3.Active Bluetooth on the second device to find "BE-RCA Pro" to connect.
- 4.Wait until connected.
- 5.Connect the first device with BE-RCA Pro manually(open your smart phone Bluetooth, click "BE-RCA Pro" to connect it manually). Now BE-RCA Pro is connected with two devices at the same time.Note: Only one device can play music at any time. You must stop the music on one device to play on the other.

Restore Factory Default Settings

You may need to reset BE-RCA Pro if it is not working as expected. When BE-RCA Pro is reset to factory default settings, all the paired device information will be cleared.

- 1) Insure the BE-RCA Pro is powered by

- 09 -