

KIMIUP 101

INSTRUCTIONS



Important Safety Information

Keep away from fire.

Do not expose to dripping or splashed fluids.


The unit should not be exposed to direct sunlight, very high or low temperature, moisture, vibrations, strong magnetic fields, high frequencies and dusty environments.

Do not disassemble or modify the device.




UK
CA


CE FC

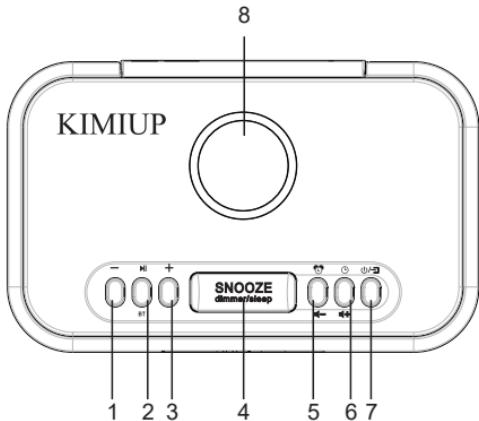

Back Panel

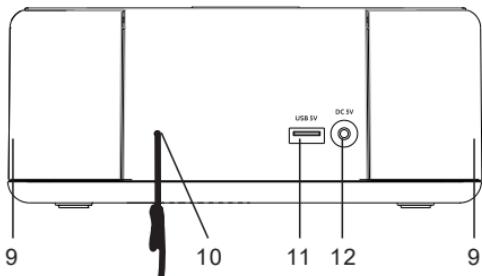

Display

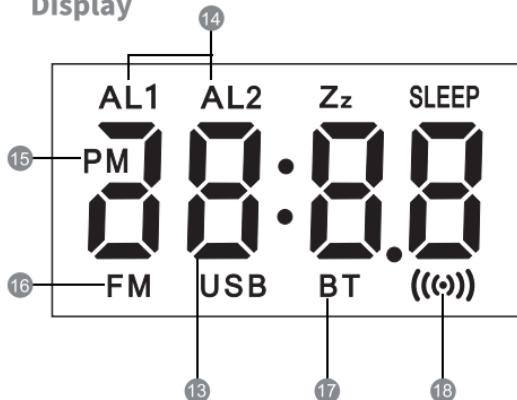

Controls & Features

1. Previous song/
Down button
2. Play/Pause
3. Next song/Up button
4. Snooze/Sleep/Dimmer
5. Volume down/
Alarm set
6. Volume up/Clock Key
7. Stand by mode/
Function key
8. Wireless
charging location

Controls & Features

9. Speakers
10. Wire Antenna
11. USB Charging port
12. DC adaptor jack

Controls & Features

13. Time display
14. Alarm indicators
15. PM Indicator
16. FM Indicator
17. Bluetooth Indicator
18. Wireless charging
indicator

Clock setting

1. Plug in the DC 5V adaptor, the unit will display the default time 0:00.
2. Press and hold \ominus () for 1-2 seconds, the display will then show 24hr.
3. Press \ominus (1) or $+$ (3) to switch between 24hr and 12hr time.
4. Press \ominus (6) again to set the hour.
5. Press \ominus (1) or $+$ (3) to change the hour.
6. Press \ominus (6) to set the minute(s).
7. Press \ominus (1) or $+$ (3) to change the minute(s).
8. Press \ominus (6) to finish once the time has been set.

Alarm setting

1. In standby mode (or clock mode), press and hold \ominus (5) for 3 seconds, the unit will then allow you to set the first alarm.
2. Press \ominus (1) or $+$ (3) to select the AL1 hour.
3. Press \ominus (5) and \ominus / $+$ (1/3) to select the AL1 minute(s).
4. Press \ominus (5) and \ominus / $+$ (1/3) again to select the AL1 source (beep or FM).
5. Press \ominus (5) and \ominus / $+$ (1/3) to select the AL2 hour.
6. Press \ominus (5) and \ominus / $+$ (1/3) to select the AL2 minute(s).
7. Press \ominus (5) and \ominus / $+$ (1/3) again to select the AL2 source (beep or FM).
8. Press \ominus (5) again once the alarm(s) has been set to exit.

Alarm enable/disable

1. In standby mode, press \ominus (5) to enable the alarm.
2. The alarm will cycle through: AL1 / AL2 / AL1 and AL2 / off.

Stop & Snooze alarm

When the alarm sounds, press \ominus (4, Snooze) to delay the alarm for 9 minutes. Press \ominus (7) to turn off the alarm.

Dimmer

Press \ominus (4, Snooze) to select the brightness of the display.

Bluetooth connecting & disconnecting

1. Press \rightarrow (7) to cycle through the modes until you get to Bluetooth mode.
2. Once in Bluetooth mode the display will flash while searching for the last connected device.
3. If the most recent connected device can not be found, the KIMIUP 101 will search for previous devices.
4. Select KIMIUP 101 from the Bluetooth list on your device to start pairing.
5. Once pairing is successful, the Bluetooth display will stop flashing and a beep will sound.
6. Press **■/BT** (2) for 3 seconds to disconnect your device from the KIMIUP 101. A beep will sound to confirm the device has been disconnected successfully. The KIMIUP 101 will now be in pairing mode again, allowing you to pair a new device.
7. Long press \rightarrow (7) to return to clock mode when you are finished.

Bluetooth play operation

- Press \leftarrow/\rightarrow (5/6) to increase or decrease the volume level (0-15).
- Press $-$ (1) to play the previous song or press $+$ (3) to select the next song.
- Press **■/BT** (2) to play or pause the song.

FM radio operation

1. Press \rightarrow (7) to cycle through the modes until you get to FM radio mode.
2. Press $-$ (1) or $+$ (3) to change the FM station.
3. Press and hold $-$ (1) or $+$ (3) to search for the next FM station automatically.
4. Press \leftarrow/\rightarrow (5/6) to increase or decrease the volume level.
5. Long press \rightarrow (7) to return to clock mode when you are finished.

FM radio memory

There are 10 preset spaces available for you to store your favourite stations.

1. Press $-$ (1) or $+$ (3) to select the FM station you would like to store.
2. Press and hold **■/BT** (2) to bring up the preset menu.
3. Press $-$ (1) or $+$ (3) to cycle through the 10 preset spaces available.
4. Press **■/BT** (2) once you have selected the preset space for your chosen FM station to save the preset.
5. Press **■/BT** (3) to access the stored presets.

Sleep mode

Sleep Mode lets you fall asleep while listening to Bluetooth or FM music for the set sleep duration then turns the music off. In FM radio or Bluetooth mode, press and hold (4, Snooze) for 2 seconds. The KIMIUP 101 will display the sleep timer.

Press (4, Snooze) to cycle through the sleep time options. The available options are: 120 mins / 90 mins / 60 mins / 30 mins / 15 mins / 10 mins / 5 mins / sleep timer off.

Wireless charging

Before wireless charging, please make sure your phone has wireless charging function.

1. Place your smartphone centrally on top of the KIMIUP 101 as shown.

2. The battery power of your device is shown via your devices display.



If problems occur when charging or if charging does not start:

- Remove your smartphone from its case if the thickness of the case exceeds 5mm or if it contains metal.
- Check if your smartphone is placed on top of the KIMIUP 101 correctly as shown.
- The charging time varies depending on the charging capacity of the battery and its current residual capacity.
- The components may heat up during the charging process. They will slowly cool down again after the charging process.

USB charging port

1. Connect an external device via a USB cable to the USB charging port (11) on the back of the KIMIUP 101 to charge the device.
2. The battery power of your device is shown via your devices display.
 - There may be some radio interference while charging.
 - Please charge your device using only one charging method at any one time.
 - Please do not charge the same device using the wireless charging function and USB charging port (11) at the same time.

Backup batteries

The KIMIUP 101 has a backup battery feature where 2x AAA batteries (not included) will allow it to remember time and alarm settings if unplugged or power is cut.

Specifications

Power Input: 5V 3.5A

USB Output: 1A

Speaker Output: 6 Watt RMS

Input voltage: 100-240V

Input AC frequency: 50/60Hz



Waste electrical and electronic products should not be disposed of with household waste.

Please recycle where facilities exist.

Check with your Local Authority for recycling advice.



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.