


AGPTEK

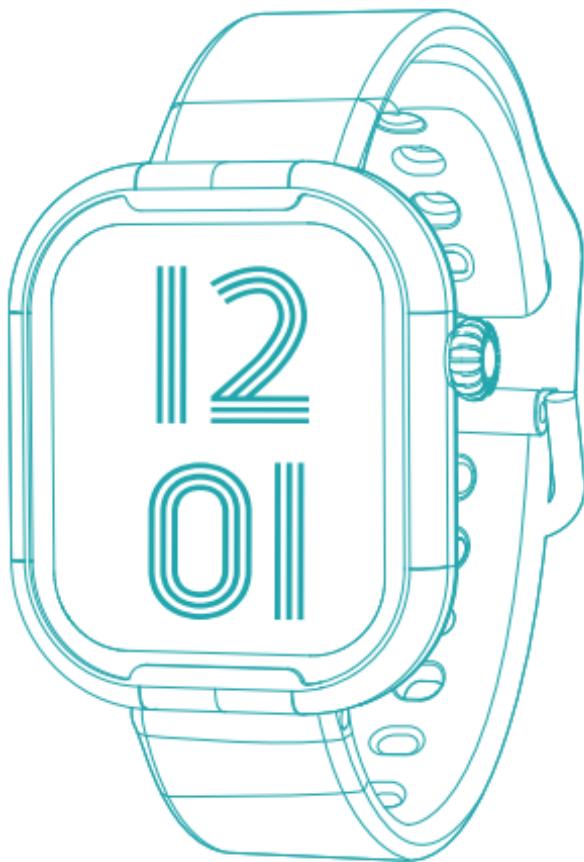

## User Manual


EN : 01-09

JP: 10-20

Model number: A09

[support@agptek.com](mailto:support@agptek.com)



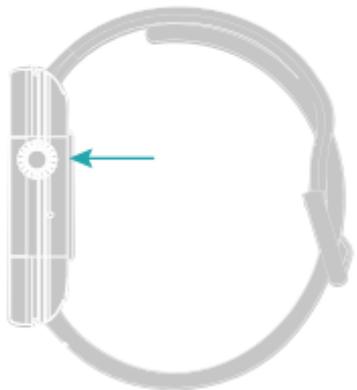

Press and hold the side button to turn on the watch.

**Note:** For first use, please charge the watch for 5 minutes, otherwise it cannot be turned on, and it takes about 2 hours to fully charge the watch.

## Download App

Power on – Click to select the language – Scan the QR code of the watch – Download the “Flymatrix” app  
For iOS: Apple App Store  
For Android: Google Play Store




## Pair with Watch

Scan code to pair with the watch.



Search device name to connect the watch.

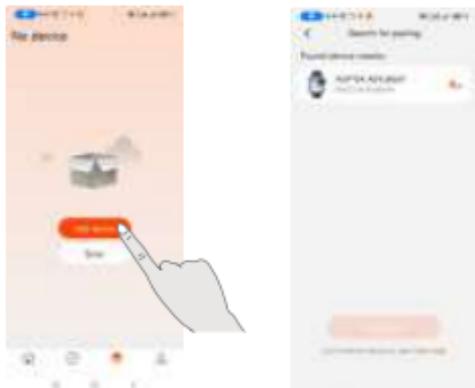

**Note:** Bluetooth name: AGPTEK A09


If fail to connect, please try the following methods:

1. Turn on the Bluetooth on the mobile phone.
2. Reset the watch when no Bluetooth signal found.
3. Need to enter the app to pair with the watch, cannot connect to the Bluetooth in the phone settings.
4. When the Bluetooth is successfully connected, the icon in the upper left corner is . If it is not connected, the icon in the upper left corner is .


## Bluetooth Call

Turn on the Bluetooth call function on the watch.


On the main interface, short press the right button to enter the menu interface, click the phone menu, and then turn on “Bluetooth Call”.

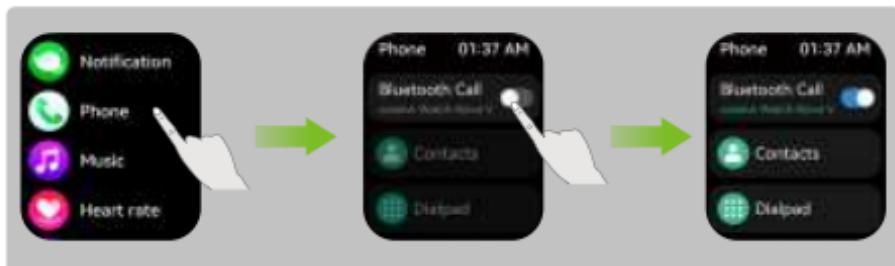


Open the Bluetooth list in the phone settings, connect to “AGPTEK A09” to use the watch to make calls.

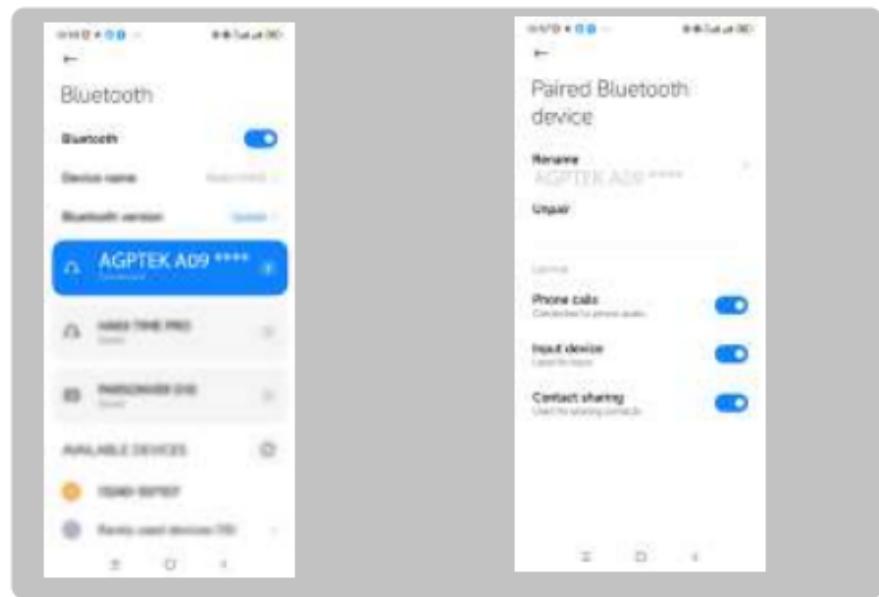

In Android

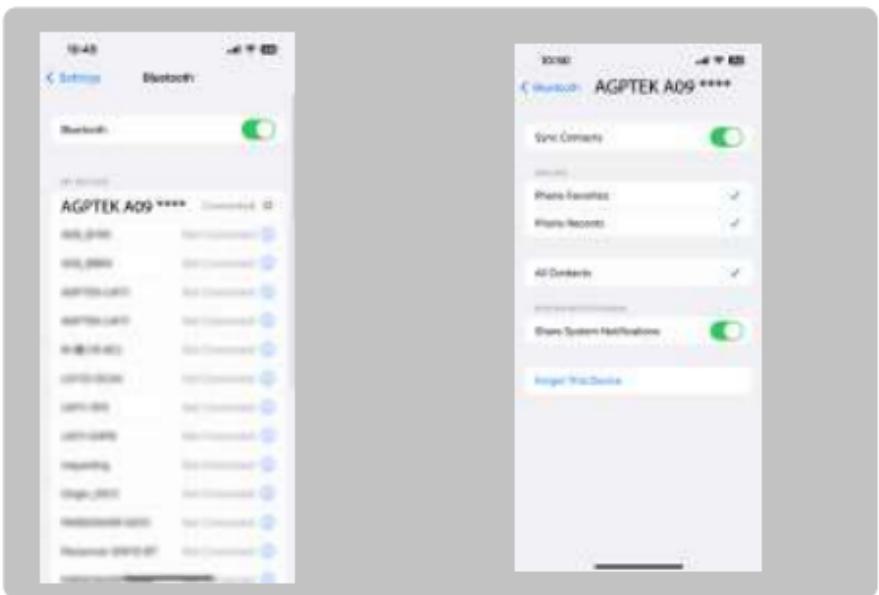

In iOS

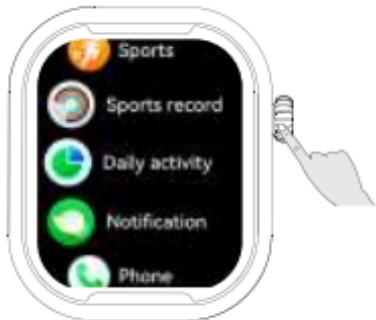

Turn on the watch and short press the side button to see more functions, such as “Sports record”, “Heart rate”, “Sleep” monitoring, etc.

## Customized Watch Faces



Customize Built-in Watch Faces




Customize Watch Faces in the App



Customize Album Watch Face

1. **Change the built-in watch face:** Press and hold the screen for 3s on the clock interface to enter the watch face selection interface.
2. **Change the watch face in the app watch face market:** Enter the app - Click the second icon  on the bottom of the page - Select the watch face to synchronize
3. **Change your own album as the watch face:** Enter the app - Click the second icon  on the bottom of the page - Click “Custom” in the upper right corner of the page to set and then synchronize the watch face

# Local Music Streaming on the Watch

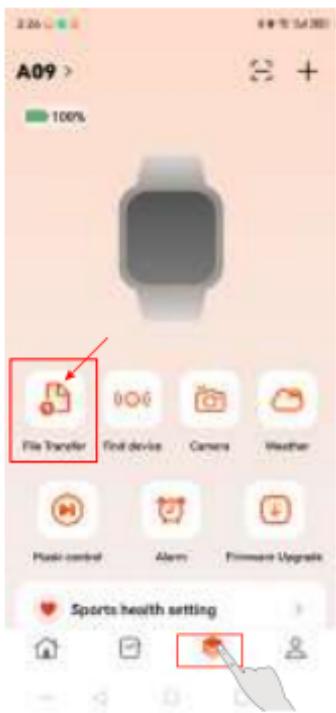

Open the APP – Click the third small icon 📁 on the bottom of the page – Click “File Transfer” – Select the corresponding music file to transfer

After the music file is successfully transferred, turn on the watch and press the side button to enter the menu interface. And then select “Music” function to view the built-in music of the watch.

**Note:** The watch only supports MP3 format music, and the memory of a single music is less than 20MB.

## Music Control



Swipe right on the main interface to enter the music module and select the corresponding music mode.

1. Turn on “Watch music” to play local music on the watch;
2. Select “Bluetooth ear connected” to enjoy local music on the watch with headsets;

3. Turn on “Mobile music”, and you can control music played on the mobile phone through the watch.

## Raise to Wake


1. Press the side button to turn on the watch.
2. Turn on “Raise to Wake” function, the icon is .

## Charge

For charging, please place the watch flat, and make sure the metal holes on the back are aligned with the metal tip of the charging head (charging contact spacing: 9mm).


### Note:

1. The rated voltage of the charging head cannot exceed 5V/2A.
2. Please do not use the vehicle power supply to charge, to avoid causing the charging cable to age or burn out due to the unstable voltage.

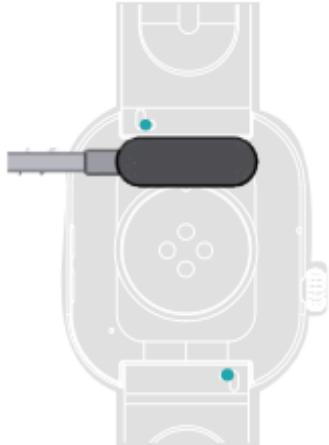

## Replace the watchband

Slide the switch of the watchband, and replace the same specification (watchband width: 22mm).

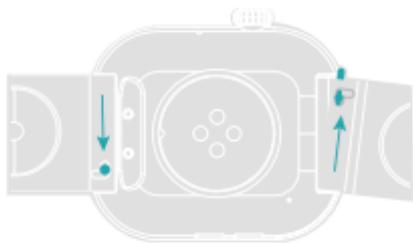



## Notes

1. Please clean your watch regularly.
2. Please do not wear it too tight to avoid discomfort.
3. Please wipe off the water before operating it when getting wet.

## Specifications

|                     |  |
|---------------------|--|
| Model Number        | A09  |
| Display             | 1.96inch                                   |
| Resolution          | 320*386px                                  |
| Bluetooth           | 5.3  |
| Compatible System   | Android 9.0 or above /<br>iOS 4.4 or above |
| Battery Capacity    | 300mAh                                     |
| Working Time        | 5-7 Days                                   |
| Working Temperature | 0 - 45°C                                   |
| Storage Temperature | -10 - 50°C                                 |

## Statement

The pictures and legends in this document are provided for illustrative purposes only and may differ from the actual condition of the product. Certain components, functions and features mentioned in this document may only be applicable to certain software versions of the product and are provided for illustration purposes only. In case of doubt, you should check with the seller of the product for confirmation.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## FCC warning

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

この度お買い上げいただき、誠にありがとうございます。

ご使用になる前にこの取扱説明書をよくお読みください。また、お読みになったあとは、いつでも見られるところに大切に保管してください。商品についてご意見やご要望、あるいは問題などがございましたら、ご遠慮なくカスタマーサポート

「fnc2017@zeus.eonet.ne.jp」までご連絡ください。

## 電源を入れる

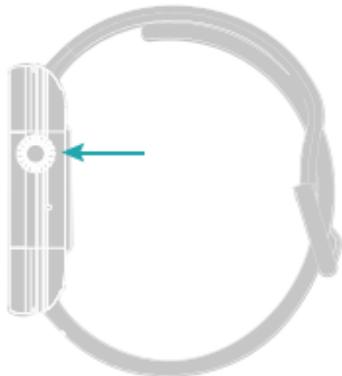

ウォッチ右側のボタンを長押しして電源を入れます。

**注意:** 初回使用時は、スマートウォッチを5分以上充電してからご使用してください。フル充電は約2時間です。

## アプリをダウンロード



iOS: Apple App Store

Android: Google Play Store


電源を入れてまず言語を設定します。 (\*「日本語」は一番下にあります)

そして左のQRコードをスキャンして専用アプリをダウンロードします。

デバイスなし

## ペアリングについて

アプリを開き、ウォッチに表示されているQRコードをスキャン、またはBluetooth検索でデバイスを追加します。初めはQRコードのスキャンをおすすめします。

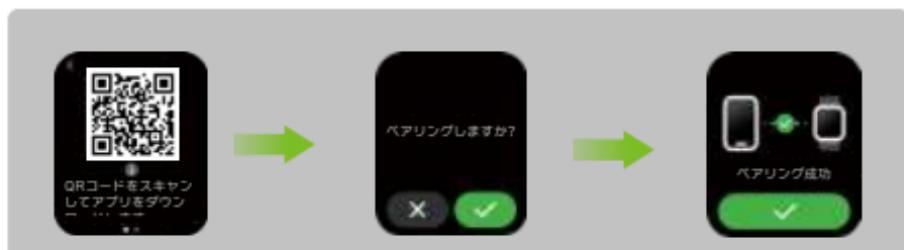

Bluetooth名はAGPTEK A09\_xxxxで、xxxxはデバイス毎に異なります。

上記方法でペアリングできない場合は、下記手順で再試行してください：

1. スマホのBluetoothが他のデバイスと接続していないことを確認します。一度周辺のBluetoothデバイスをオフにして、ウォッチとのペアリングを再試行します。
2. ウォッチをリセット(初期化)します。
3. スマホのBluetoothデバイスリストからペアリングするのではなく、アプリに入ってペアリングします。
4. ペアリングできた場合、文字盤画面で下から上にスワイプすると、左上に  が表示されますが、ペアリング失敗した場合、  が表示されます。

## 基本操作

1. 右側のボタンを長押して、電源オン/オフします。  
電源オンの状態で短く押すと、画面が点灯します。
2. 文字盤画面を長押しすると、文字盤の切り替えができます。
3. 文字盤以外の任意画面で、左から右にスワイプすると、前の画面に戻ります。
4. 文字盤以外の任意画面で、右側のボタンを押すと、文字盤に戻ります。
5. 右側のボタンを押すと、メインメニューに入ります。  
ボタンを回すと、メニューがスライドします。

## メッセージ通知 (受信トレイ)



1. 文字盤画面で上から下にスワイプすると、受信トレイが表示されます。すべてのメッセージはこちらからご確認いただけます。
2. メッセージをタップして内容を確認できますが、文字数に制限がありますので、上限を超えた場合は、一部の内容が表示しません。
3. 一つのメッセージを左へスワイプすると、該当メッセージを消すことは可能ですが、一番下のゴミ箱マークをタップすると、すべてのメッセージを消去することができます。

## ユーザー補助機能メニュー

文字盤画面で下から上にスワイプすると、ユーザー補助機能メニューに入ります。

- |        |        |
|--------|--------|
| スマホを探す | 懐中電灯   |
| 音量と振動  | 画面の明るさ |
| 腕上げ点灯  | 着信音の有無 |
| マナーモード | 設定     |

## よく使う機能



文字盤画面で左から右にスワイプすると、よく使う機能のメニューに入ります。

アプリでよく使う機能のパーツをカスタマイズできます。

デフォルトは音楽コントロール、スポーツ、電話、設定です。

### 1. 音楽コントロール



アイコンをタップすると、音楽出力デバイスを選択できます。



アイコンをタップすると、ウォッチに保存された音楽の確認及び再生ができます。



アイコンをタップすると、音量を-/+できます。または右側のボタンを回して調節できます。

### 2. スポーツ



各種のスポーツモードを選択できます。

### 3. 電話



電話をかける、アドレス帳や通話履歴などを管理できます。

## 4. 設定



画面の明るさ、音量と振動、マナーモード、リセットなどの設定ができます。

## 5. 機能/パートをカスタマイズ



アプリの「よく使う機能」に入って、パートの変更ができます。「音楽コントロール」を選ばない場合、最大9つのパートが選べます。ただし、「音楽コントロール」を選んだ場合、最大4つのパートが選べます。

## Bluetooth通話機能について



1. ウォッチの文字盤画面で右から左にスワイプすると、「電話」に入ります。

2. 一番上の「Bluetooth通話」をオンにします。
3. スマホの「通話音声」をオンにして、「連絡先と通話履歴の共有」を設定します。
4. アプリの「Bluetooth通話」に入って、連絡先を同期できます。



## 文字盤の変更について

文字盤画面を長押しすると、文字盤の切り替えができます。



### ・文字盤をカスタマイズしたい場合:

1. アプリの アイコンをタップして、画面上の「オリジナル文字盤を作る」をタップします。

2. 文字盤の背景、時間スタイル、テキストカラーを選択して作成します。
3. 作成ボタンを押すと、自動的にウォッチと同期します。
4.  アイコンをタップすると、文字盤を管理（設定と削除）できます。

**注意:** 動画形式はMP4のみサポートされています。



## スマホから音楽をウォッチにアップロード

アプリを開いて、下三番目のアイコン  をタップして、ファイル転送を選択します。アップロードしたい音楽ファイルを選択して転送します。



## ウォッチのスピーカーで音楽を再生したい場合:

1. ウォッチの文字盤画面で左から右にスワイプして、よく使う機能のメニューに入ります。

2.  アイコンをタップして、「ウォッチの音楽」を選択します。
3.  アイコンをタップして、ウォッチに保存された音楽の確認及び再生ができます。


**注意:** MP3形式のみ対応、またサイズ20MB以上の音楽ファイルは転送できません。

## 充電について

1. 充電器ケーブルのUSBコネクターをACアダプターに差し込み、コンセントと接続します。
2. 充電ケーブルのもう一方の端を持ち、ウォッチ裏側の充電ピンに取り付けます。

**注意:**

- ① 規格外 (5V1A以上) のACアダプターの使用はご遠慮ください。満充電になったのにもかかわらず、コンセントを抜かずにそのまま放置しないでください。故障の原因に繋がります。
- ② 車載アダプターで充電しないでください。電圧不安定による故障の原因に繋がります。

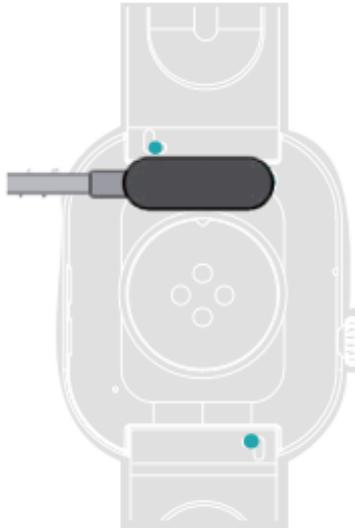

# ベルトの交換について

交換可能のベルト幅は22mmです。


## ・外し方

ウォッチを裏返して、写真の○部分を矢印の方向におさえるとベルトが外れます。

## ・取り付け方

ウォッチを裏返して、ベルトを固定するための穴にベルトの金属部分をひっかけます。

写真の○部分を矢印方向におさえながらもう一つの穴にあわせてベルトの金属部分を差し込めば完了です。

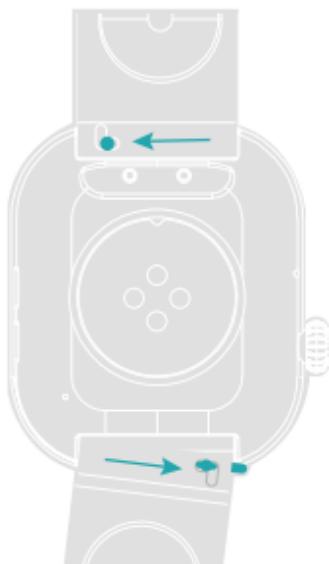

## ⚠ 注意

1. 着用後、不快感や気触れが生じた場合は使用を中止してください。
2. 腕に不快感を与えないように、着用する時はベルトのサイズを最適に調節してください。
3. ウォッチを付けたまま水泳しないでください。濡れた場合は、柔らかい布で水を拭き取ってください。
4. アレルギー症状が出る場合、使用を中止し、お医者さんと相談してください。
5. 充電端子に水が付着していないことを確認してから充電してください。
6. 電池の劣化をできるだけ防ぐために、置きっ放し充電しないでください。長時間使わない場合は、1ヶ月～3ヶ月に一回ほど充電し、充電率を50%にしてから保管してください。
7. 高温多湿な環境でウォッチを保管しないでください。

## 製品仕様

|           |                             |
|-----------|-----------------------------|
| 型番        | A09                         |
| ディスプレー    | 1.96インチ                     |
| 解像度       | 320*386px                   |
| Bluetooth | 5.3                         |
| システム      | Android 9.0以上/<br>iOS 4.4以上 |
| バッテリー     | 300mAh                      |
| 持続時間      | 5-7日                        |
| 動作温度範囲    | 0 - 45°C                    |
| 保管温度範囲    | -10 - 50°C                  |





**Manufacturer:**

AGPTEK

**Address:** 7706 18TH AVE, BROOKLYN, NY, 11214

**E-mail:** support@agptek.com

Jiangsu Saibo Yuhua Technology Co., Ltd.

Building 8(D) of Yancheng High-tech Zone Intelligent  
Terminal Industrial Park, P. R. China, 224001

**FCC ID:** 2A2N5-A09

**Model number:** A09

**UK | RP OCEAN SUPPORT LTD**

✉ Info@topouxun.com

📍 Amber, Office 119, Luminous House 300  
South Row, Milton Keynes, MK9 2FR

**EC | REP Ocean Trading GmbH**

✉ ear@oceantTrading.de

☎ +0049-30/25758899

📍 Anhalter Str. 10, 10963, Berlin, Germany



**Made in China**