


X26-海奇同屏-折页英文说明书尺寸78X120MM 黑白印刷 材质：书写纸

PROJECTOR

User manual

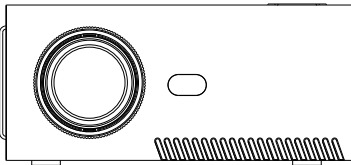

Please read this user manual carefully before using the projector.

Please save it for future reference.

Safety instructions

Notice

1. Please read the user manual carefully before using the projector.

2. Please use standard power cord with ground wire,to ensure stable power supply.

3. Please use the same power voltage as marked on the projector.

4. Please do not disassemble the projector by yourself,otherwise the warranty will be void.

5. Please do not look into the lens when the projector is working,otherwise it may hurt your eyes.

6. Please do not cover the projector ventilation holes with any material.

7. Please keep the projector away from water or any other liquid as it is not waterproof.

8. Please don't put the projector in wet or moist conditions to prevent electric shock.

9. Please turn off and unplug from the power supply if not using the projector for a long time.

10. Please use the original packing foam or other anti-shock material when relocating the projector.

11. Please contact our customer support if you encounter any problem with the projector.

12. Not recommended for Powerpoint, Word, Excel, or business presentations.

13. To connect the video projector to PC/laptop, please adjust the PC/laptop display resolution to 1920\*1080 for best clarity.

14. Recommended for use in the dark rooms. Please draw the curtains if you use in the daytime.

15. Dolby is not supported.

16. In a residential environment, running this device may cause wireless interference.


Accessory List


Projector*1	Manual*1	Power cable*1	Remote Control*1 (battery not included)
-------------	----------	---------------	---

Basic parameters


Display Technology	LCD
Native Resolution	1280*720 dpi
Light	LED
Life Span	20000hrs
Color Reproduction	16.7kk
System	Screen mirroring
Focus	Electronic focus
Keystone	Electronic correction
Power Voltage	~100-220V 50Hz
Input	USB/HDMI/AV/TF/Type-c
Output	Earphone USB (5V-500mA)
Speaker	Dual 4Ω 5W
Aspect Ratio	4:3/16:9
Environment of use	Temperature0°C~ 40° C Storage temperature-20 ~ +45° C Humidness10% ~ 80%
Throw Distance	0.8~3.9M
Screen Size	23"-120"
Projector Ratio	1.53:1
Integrated watt	60W
Unit size	178X151X78mm
Net Weight	0.85Kg

Projector Overview






PROJECTOR CONNECTIONS

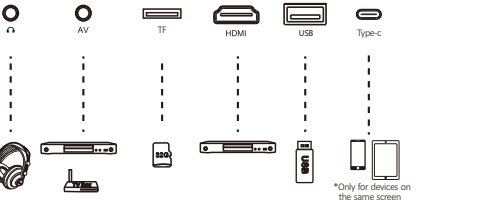

Remote Control

Button instruction:

Power On/Off: Standby/wake up, power on/power off  
Source: Switch system input signal sources  
Arrow keys: up\down\left\right;Press the left and right arrow keys in the playback interface to realize the fast forward/fast back function  
Focus: Adjust focal length & adjust picture sharpness  
Electronic correction: Adjust the Angle of the picture so that the picture is square

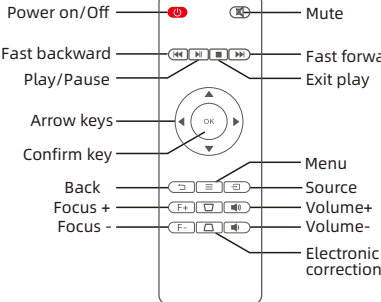


Caution

1.Do not submerge the remote control in water.  
2.Do not put the remote control near a fire or in a wet / hot place.  
3.Do not use old and new batteries together in the remote control.  
Please take the batteries out if not using the remote control for a long time to avoid battery leakage.  
4.Please point the remote control at the IR receiver.  
5.Please use the remote control within 6 meters distance and 30 degree angle.



Operation introduction

\*After 5-10 seconds,the system screen will be displayed



1.Power On



After the projector is powered on through the power cord, it enters the standby state. Press the " " button on the projector or press the " " button on the remote control to power on.



Operation introduction

2.Power Off



Double-press the " " button to shut down immediately.  
Click the " " button to display the function prompt and select shutdown.



Press power on

3.Focus

After starting up, press the focus key "F+" "F-" on the remote control to adjust the picture clarity  
You can display video or the menu screen to check the adjustment.





▲ Notice:








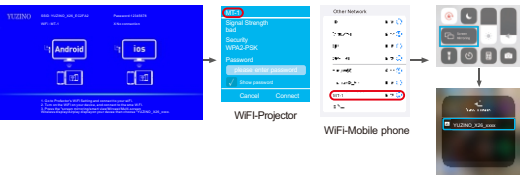

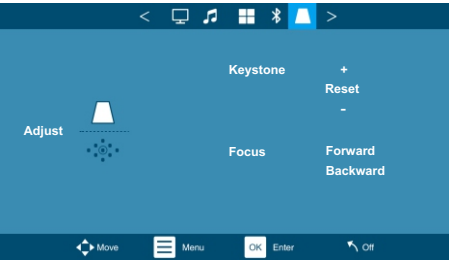
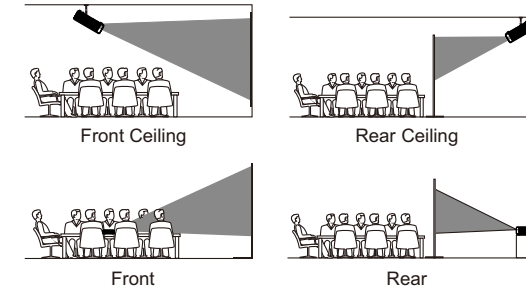
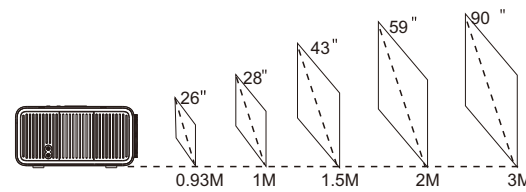
If the picture is still blurry, please adjust the projection distance appropriately.

Operation introduction

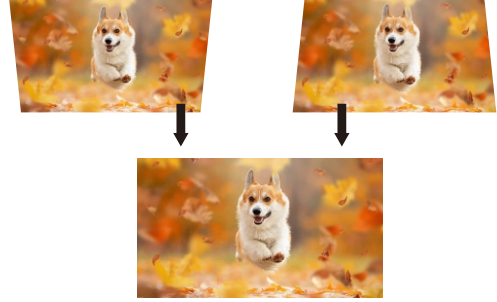4.Keystone

\*Electronic correction: Press the ladder button on the remote control to adjust the Angle of the picture.

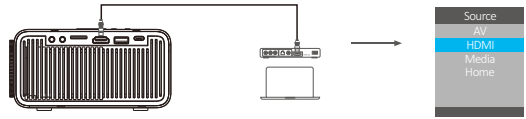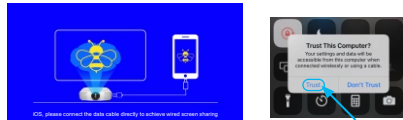

Connecting		Connecting		Screen mirroring		Screen mirroring		Screen mirroring		Menu		Installation			
<p><b>5.Source</b></p> <p>Press the Source key on the projector or press the  Source button on the remote to switch AV/HDMI/Media/Home.</p> <div> Source AV HDMI Media Home</div>		<p><b>5.3 HDMI connection</b></p> <div></div>		<p><b>8. Wired screen</b></p> <p>Wired screen (For iOS)</p> <p>1) Click on the main "Wired screen" to enter.</p> <p>2) Connect the phone to the projector with a USB cable, select "Trust" in the prompt interface, the wired connection success.</p> <div></div>		<p><b>9. Wireless screen</b></p> <p>For Android system (Home WiFi)</p> <p>For Android system (The projector comes with a WiFi hotspot)</p> <p>1) Click "Wireless Screen"  on the main screen to enter and view the device name,For example, "YUZINO_X26_xxxx";</p> <p>2) Connect the projector and mobile phone to the same Home WiFi;</p> <p>3) Open the "Multi-screen/Wireless projection" function of the phone,select and connect that device name of the projector.</p> <p>4) Now you can start to use the screen mirroring function with your phone.</p> <div></div>		<p>For iOS system (Home WiFi)</p> <p>1) Click "Wireless Screen"  on the main screen to enter and view the device name,For example, "YUZINO_X26_xxxx";</p> <p>2) Connect the projector and mobile phone to the same "Home WiFi";</p> <p>3) Open the "Screen mirroring" function of the phone, select and connect that device name of the projector.</p> <p>4) Now you can start to use the screen mirroring function with your phone.</p> <div></div>		<p><b>10. Menu Settings</b></p> <p><b>Operation method :</b> Press the  button on the remote control to display the menu, press the "OK" button to enter, and press the direction button to select.Press "OK" to confirm.</p> <p><b>Picture :</b> Image Mode/Contrast/Brightness/Color/sharpness/Color temperature</p> <p><b>Sound :</b> Sound Mode/treble/Bass/Balance/</p> <p><b>Option :</b> OSD Lang/ Flip /Factory reset/software upgrade/Auto Sleep /OSD Timer/Version info</p> <p><b>BT Device :</b> Sound Mode/Treble/Bass/Balance</p> <p><b>Adjust :</b> Keystone/Focus</p> <div></div>		<p><b>Install Method</b></p> <p>*The projector can be hanged on the ceiling with a special hanger frame, and keep the projector at a height where its lens is axial symmetry to the screen.If this is not possible, use the four-point keystone function to adjust the projected image.</p> <div></div> <p><b>Projector distance and size</b></p> <div></div>		<p>FCC Statement</p> <p>Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"><li>—Reorient or relocate the receiving antenna.</li><li>—Increase the separation between the equipment and receiver.</li><li>—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li><li>—Consult the dealer or an experienced radio/TV technician for help.</li></ul> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator &amp; your body.</p> <p>For indoor use only in bands 5150-5250MHz.</p>	