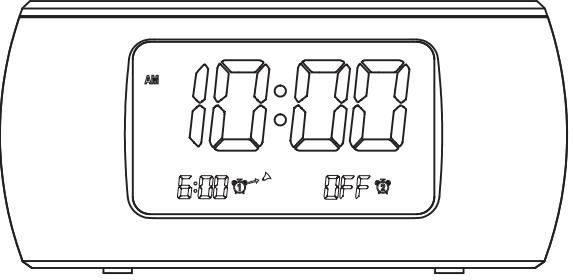

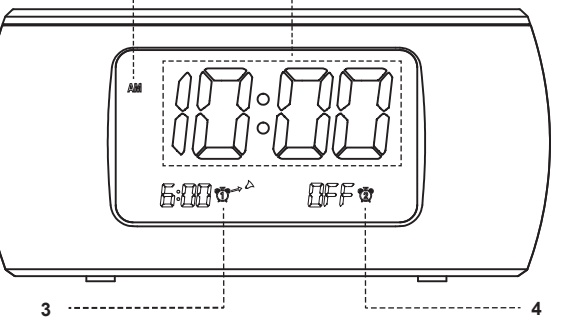
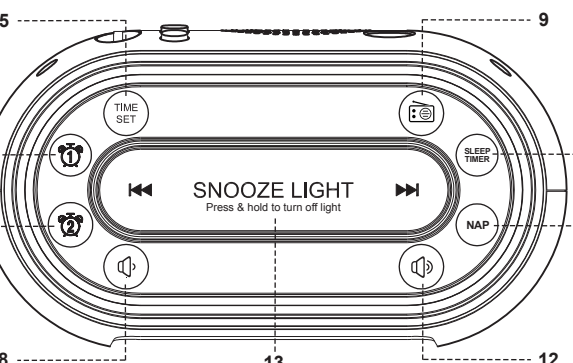
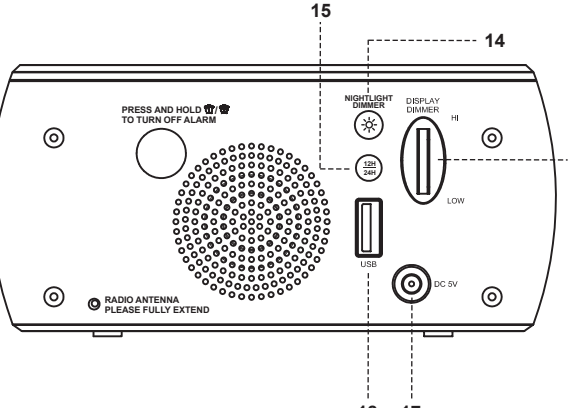
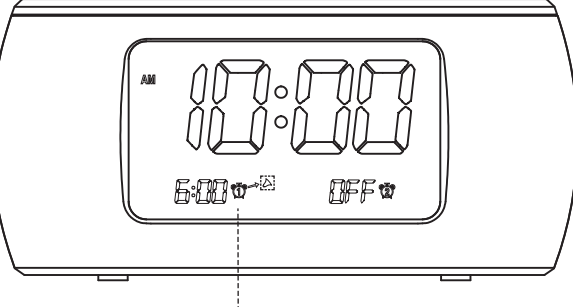

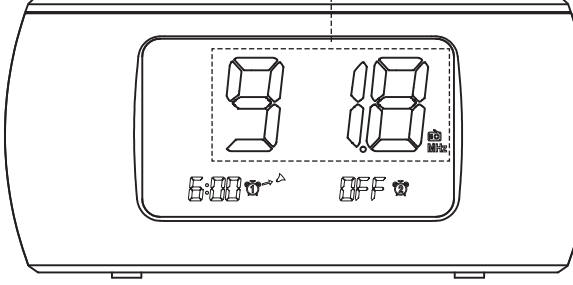
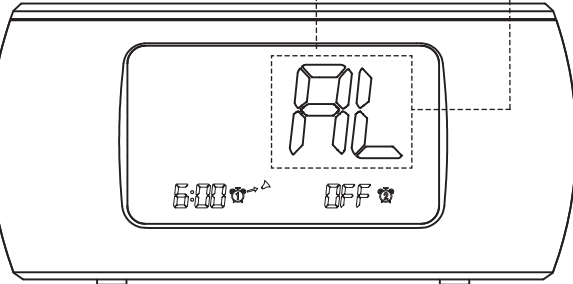
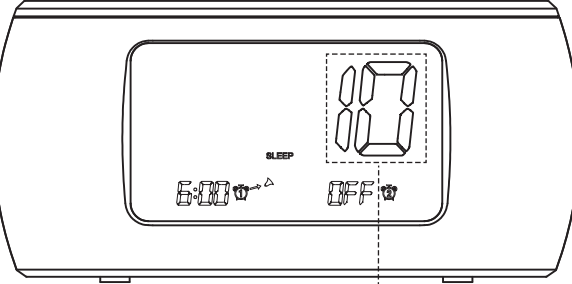
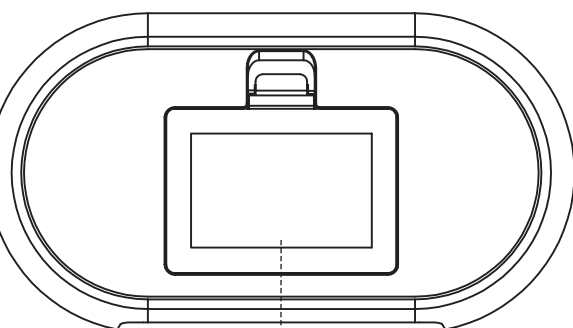
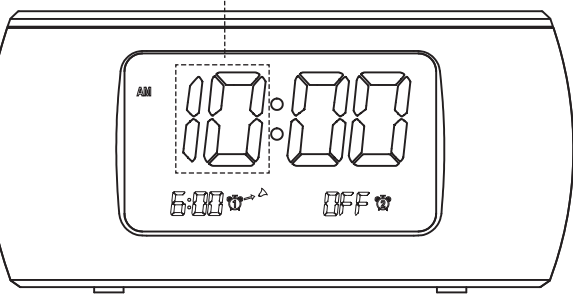
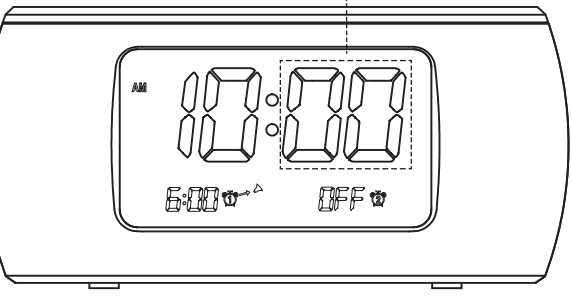
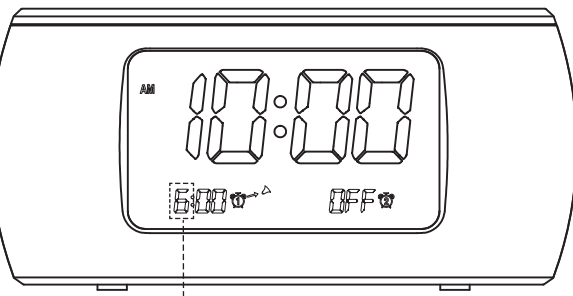
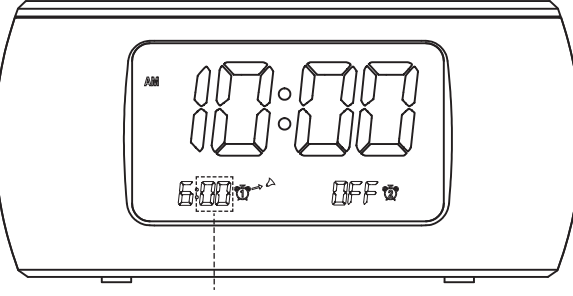
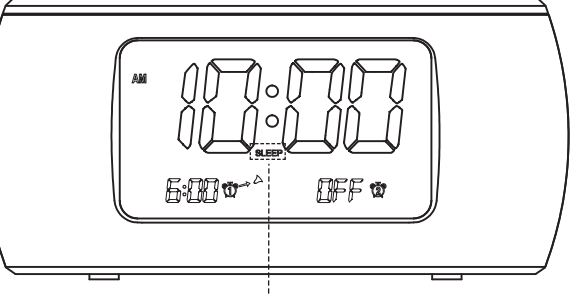
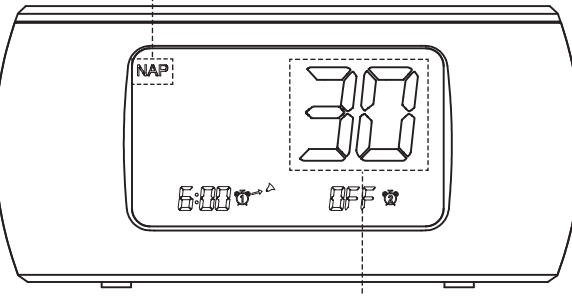
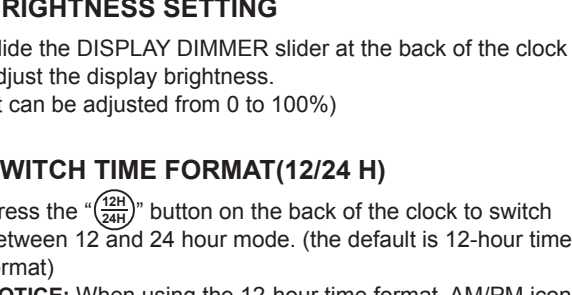



540*220mm 折后中： 90*110mm

<div><div>HOUSBAY</div><div>GLOW User Manual</div><div></div><div><div>1 Year Warranty</div><div>If a faulty product is found when setting up please Email us at support@keviec.com.</div></div><div>TIPS: The batteries drains fast (lasting just ten hours) if battery operated ONLY.Please keep plugged in !</div></div> <div>1</div>	<div><div>Please read all the instructions carefully and keep this in a safe place for future reference.</div><div>INSTRUCTIONAL VIDEO:</div><div>Please scan the QR code here to access the instructional video of this product.</div><div></div><div>2</div></div>	<div><div>POWER SPECIFICATIONS:</div><div>AC100-240V, 50/60Hz.</div><div>FEATURES:</div><div><ul style="list-style-type: none">• FM Radio• 7 Colorful Night Light• 0-16 Level Adjustable Volume• 0-100% Brightness Control For Display• 5 Level Brightness Control For Nightlight• Dual Alarm & Snooze• USB Charging Port• Battery Backup• 12/24H Mode</div><div>3</div></div>	<div><div>FRONT VIEW</div><div></div><div><div>1. AM</div><div>2. TIME</div><div>3. ALARM 1</div><div>4. ALARM 2</div></div><div>4</div></div>	<div><div>TOP VIEW</div><div></div><div><div>5.TIME SET</div><div>6.ALARM 1 SETTING AND ON/OFF</div><div>7.ALARM 2 SETTING AND ON/OFF</div><div>8.VOLUME DOWN</div><div>9.RADIO ON/OFF</div><div>10.SLEEP</div><div>11.NAP</div><div>12.VOLUME UP</div><div>13.SNOOZE LIGHT</div></div><div>5</div></div>	<div><div>BACK VIEW</div><div></div><div><div>14.NIGHTLIGHT DIMMER</div><div>15.12/24 H MODE SWITCH</div><div>16.DIMMER CONTROL (0-100%)</div><div>17.POWER CONNECTOR</div><div>18.USB CHARGING PORT</div></div><div>6</div></div>	<div><div></div><div>Icon of Alarm 1 Flashes</div><div>4.Press the " " button to confirm and exit from Alarm 1 Setting Mode.</div><div>ALARM VOLUME SETTING</div><div>When radio is OFF, press the "VOL+" or "VOL-" buttons to select the volume level. (0-16 adjustable)</div><div>A number will be shown on the display.</div><div>12</div></div>	<div><div>ALARM PAUSE & SNOOZE</div><div>When the alarm goes off, you have two options:</div><div>1.press " " or " " button to stop the alarm when it's ringing. Alarm will go off on the next day.</div><div>2.press "SNOOZE LIGHT" buttons to snooze, the indicator "zz" will show up on the display. The alarm will go off again 9 minutes later.</div><div>ALARM ON/OFF</div><div>Press the " " button to turn on alarm 1. Press and hold the " " button for 2 seconds to completely turn off alarm 1 and OFF is appeared in the alarm zone. The alarm will NOT go off in the next day.</div><div>NIGHTLIGHT SETTING</div><div>1.Press the "SNOOZE LIGHT" button to turn on the nightlight. Then press the "SNOOZE LIGHT" button to change the color of the nightlight.</div><div>13</div></div>	<div><div></div><div>Nightlight ON/OFF & Change Color</div><div>2. When nightlight is on, press " " button on the back of the clock to adjust the brightness of nightlight, 5 level brightness adjustable.</div><div>3.Press and hold the "SNOOZE LIGHT" button for 2 seconds, the nightlight will be turned off.</div><div>FM RADIO SETTING</div><div>Please extend the FM antenna on the back of the clock.</div><div>1.Press the " " button, FM radio will be ON/OFF.</div><div>14</div></div>	<div><div></div><div>Wake Up Radio Alarm Setting</div><div>2.Press and hold " " button for 2s, FM radio will scan and auto-store the scanned stations. Once the station search is completed, the first station will be played automatically. Press the " " or " " buttons to tune from auto-store stations.</div><div>Stations Scan</div><div>3.Use the "VOL + " or "VOL - " buttons to adjust the volume of FM radio. 0-16 level adjustable.</div><div>WAKE UP RADIO ALARM SETTING</div><div>When radio is on, press the " " or " " button to tune radio stations you like, then press and hold "SLEEP TIMER" button until icon "AL" appear on the display screen. The clock immediately saves this station as Wake Up Radio Alarm Sound.</div><div>15</div></div>	<div><div></div><div>AL Appear</div><div>Saved Radio Station</div><div>BATTERY OPERATED SETTING</div><div>Install 3* AAA batteries(Not included) into Battery Compartment. NOTICE:Under the battery power, clock has all functions except for USB charging your electronic device.</div><div>SLEEP TIMER</div><div>You can use sleep timer to turn off nightlight and radio automatically when the preset sleep timer comes.</div><div>1.Press repeatedly the "SLEEP TIMER" button to select the sleep timer ranging from OFF, 10, 30, 60, 90 to 120 minutes. The sleep timer will be seen on display.</div><div>16</div></div>	<div><div></div><div>Sleep Timer, 10 minutes,</div><div>2.When the sleep timer is set, please wait for 3 seconds to exit from the setup. The "sleep" indicator will be seen on the display.</div><div>17</div></div>
<div><div>BOTTOM VIEW</div><div></div><div>20.BATTERY COMPARTMENT</div><div>GETTING STARTED</div><div>Plug the adaptor into a standard household outlet, you will see 12:00 on the display and the clock is ready to be set.</div><div>6</div></div>	<div><div>NOTICE:</div><div><ul style="list-style-type: none">• If the display is "blank" after plugging in, please check whether the DISPLAY DIMMER on the back is at the HIGH position.• To backup the time and alarm settings in case of power outage, we strongly recommend you to install three AAA batteries on the bottom of the clock before getting started.• Please extend the FM antenna on the back of the clock.</div><div>TIME SETTING</div><div>1.Press "TIME SET" button to enter HOUR setting. The HOUR digits will flash on the display. Press the " " or " " buttons to advance to the correct hour.</div><div>7</div></div>	<div><div></div><div>HOUR Flashes</div><div>2.Press the "TIME SET" button to confirm and enter MINUTE setting. When the MINUTE digits flash, press the " " or " " buttons to advance to the correct minute.</div><div>8</div></div>	<div><div></div><div>MINUTE Flashes</div><div>3.Press the "TIME SET" button again to confirm and exit from Time Setting Mode.</div><div>NOTICE: The clock will exit automatically from the TIME setup mode if no action is taken within 5 seconds. (Action refers to pressing the desired button for setup)</div><div>9</div></div>	<div><div>ALARM SETTING</div><div>ALARM 1 and ALARM 2 are set in the same way.</div><div>1.Press the " " button to enter ALARM 1 HOUR setting. The HOUR digits will flash on the display. Press the " " or " " buttons to advance to the desired hour.</div><div></div><div>HOUR Flashes</div><div>10</div></div>	<div><div></div><div>MINUTE Flashes</div><div>2.Press the " " button to confirm and enter MINUTE setting. The MINUTE digits will flash on the display. Press the " " or " " buttons to advance to the desired minute.</div><div>3.Press the " " button to confirm and enter WAKE UP SOUND setting. The icon of alarm 1 will flash on the display. Press the " " or " " buttons to choose from Beep sound, Bird chirping sound or FM radio which is the last tuned in radio station or the station you set in WAKE UP RADIO ALARM (Page 15).</div><div>11</div></div>	<div><div></div><div>Sleep Timer ON</div><div>3.To turn off the sleep timer, press "SLEEP TIMER" button to select "OFF" and wait for 3 seconds for it to work.</div><div>4.When sleep timer is on, press "SLEEP TIMER" button to see the sleep timer remained.</div><div>18</div></div>	<div><div></div><div>NAP Timer</div><div>Just press "NAP" button to choose the nap timer you want without resetting a new alarm.</div><div>1.Press repeatedly the "NAP" button to select the nap timer ranging from 10, 30, 60, 90 to 120 minutes or to turn it OFF. The nap timer will be seen on display.</div><div>30 minutes</div><div>19</div></div>	<div><div></div><div>BRIGHTNESS SETTING</div><div>2.When the preset nap timer comes, the duration of the alarm is 30 minutes.The default of alarm sound is bird chirping.</div><div>3.Press "NAP" " " or " " button to turn off the alarm when it's ringing. Press "SNOOZE LIGHTG" button to snooze, the alarm will go off again 9 minutes later.</div><div>4.When nap timer is on, press "NAP" button to see the nap timer remained.</div><div>BRIGHTNESS SETTING</div><div>Slide the DISPLAY DIMMER slider at the back of the clock to adjust the display brightness. (It can be adjusted from 0 to 100%)</div><div>SWITCH TIME FORMAT(12/24 H)</div><div>Press the " " button on the back of the clock to switch between 12 and 24 hour mode. (the default is 12-hour time format)</div><div>NOTICE: When using the 12-hour time format, AM/PM icon will appear to suggest morning/afternoon time.</div><div>20</div></div>	<div><div>USB CHARGING</div><div>The unit is added with one USB output interface for other devices.</div><div>Output:5V /1A</div><div>CARE OF YOUR CLOCK</div><div>Please replace the backup batteries every year or consider storing the clock without a battery when it is not in use. Please use a cloth or a paper towel to clean it. Avoid anycorrosive cleaner or chemical solutions when cleaning. Make sure the clock is kept clean and dry always.</div><div>SUPPORT</div><div>The alarm clock comes with one year warranty. If you have any issue with this clock, please contact us at support@keviec.com. We will address your issue within 24 hours.</div><div>21</div></div>	<div><div>Any changes or modifications not expressly approved by the party responsible for compliance could void the user ' s authority to operate the equipment.</div><div>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</div><div>(1) this device may not cause harmful interference, and</div><div>(2) this device must accept any interference received, including interference that may cause undesired operation.</div><div>Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</div><div><ul style="list-style-type: none">- Reorient or relocate the receiving antenna.- Increase the separation between the equipment and receiver.- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.- Consult the dealer or an experienced radio/TV technician for help.</div><div>22</div></div>	<div><div></div><div>Sleep Timer, 10 minutes,</div><div>2.When the sleep timer is set, please wait for 3 seconds to exit from the setup. The "sleep" indicator will be seen on the display.</div><div>23</div></div>