

**ILLUSION®**

# SPECIFICATION

LED STRIP KIT - (RGB + Tunable CCT )





## Model : RGBCX LED STRIP KIT



### Comprehensive Description

- ◆ RGB + CCT (2000-6500K tunable);
- ◆ Crystal glue with beautiful appearance;
- ◆ Smart WIFI Control by TUYA;
- ◆ Available for Alexa, Google Assistant;
- ◆ A variety of fittings are optional to install easily;
- ◆ Easy connection.



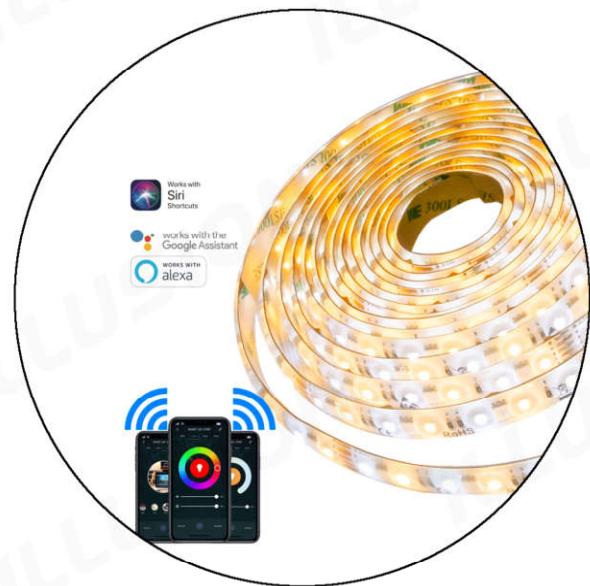



### LED Strip

LED Type	30 RGB + 30 WW + 30 CW / meter
Ra	CRI80
CCT	WW+RGB+CW
Power	16W/meter
Waterproof Type	IP54 Crystal Silicone/PU waterproof

### LED Controller (TUYA)

Appearance	Customized private mould
Input Voltage	DC12-24V
Work with	Google assistant Alexa

### LED Driver

Type	Plug-in
Power	36W
Plug	EU / AU / American Plug etc
Certificate	UL / GS / TUV-CE
Housing color	White / Black
Waterproof grade	IP20 / IP44

## BIN

For all your order




Today and tomorrow

"One Bin Only" within 3 MacAdam,  $|Duv|<0.006$  guarantees constant color temperature.

Graphic Description:




## Package

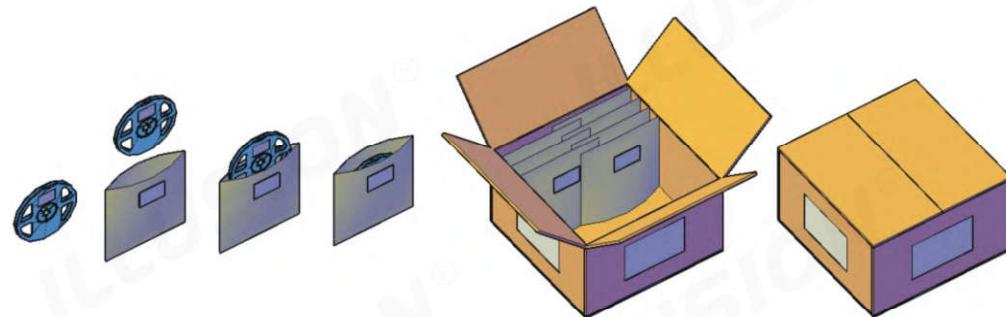


## Installation

AC100-240V

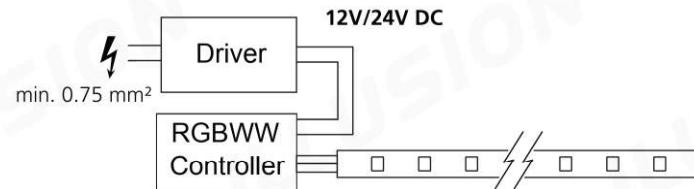

### ⚠ Cautions:

- When install the led strip , please note the installation technique. The led strip can be bent, but not distorted, as shown below:

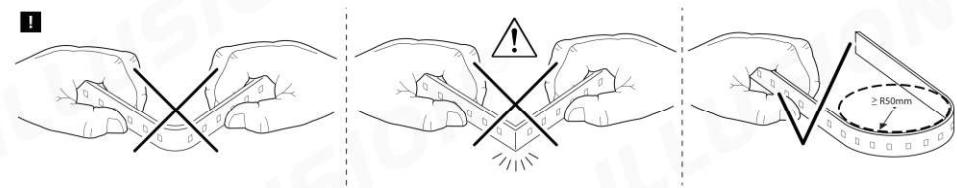

- LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC110 or AC220V, otherwise it will burn out the LED strips.
- Clean up the installation surface, it will ensure the reliability of the adhesive.
- The electrical connection process must be operated by a professional person.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.