


Smart Cable Lock

YL-C3BF

- Waterproof rate IPX6
- Support 15 fingerprints
- Support App unlock remotely




Smart Cable Lock

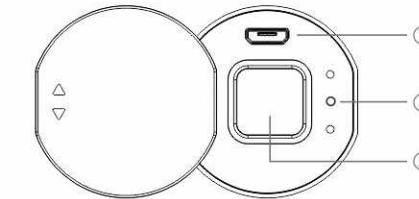

Components:

- ① USB Charging Port
- ② Fingerprint Sensor
- ③ Indicator Light
- ④ Lock Cable

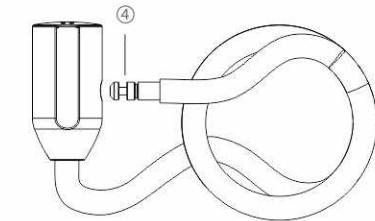

Overview

1. The product is charged by USB cable. Please fully charge the product at the first time.
2. Support 15 fingerprints: No. 1 to 2 is the administrator, No. 3 to 15 is the ordinary user.
3. Support total 21 user-accounts on App (1 administrator user and 20 ordinary users).
4. The smart lock can be unlocked by any fingerprint in factory mode.
5. Battery can be fully charged by 40 minutes. Standby time is 1 year.

App Setting

A. Download "eSmartLock" From Google Play (Android)/App Store (iOS) , and log in "eSmartLock" by registered account or WeChat.

B. Turned on BT of smart phone, And in order to use BT properly it needs to obtain location permission for Android phone.

C. Touch the fingerprint sensor of smart lock and blue light flashes, click "+" icon and enter "Add device", the scanned smart lock will be displayed in the list. Choose one to add, and then modify the initial administrator password (Please make sure that you remember the password).

D.Register administrator fingerprint:

1.Connect App with smart lock: Touch the fingerprint sensor of smart lock and blue light flashes, click "click to connect" icon on the main interface of APP. Please note :smart lock will go to sleep mode and BT is disconnected automatically if there is no operation for 1 minute.
2. Enter" User Management"- "0 admin"- "Fingerprint management"- "fingerprint 1"- "Add fingerprint". Then press fingerprint sensor by the finger 5 times (The green indicator light flashes once each time) and register the administrator fingerprint successfully. It supports 2 administrator fingerprints.

E. Register ordinary fingerprint(2 Ways):

1.Set fingerprints by App. Please read "D. 2" instruction.(Recommended Use).
2.Set fingerprints with ADMINISTRATOR fingerprint. Unlock smart lock, press and hold fingerprint sensor by ADMINISTRATOR fingerprint for 8 seconds till the blue light is always on. And press the new fingerprint to be registered 5 times (the green light flashes once each time). It registers ordinary fingerprint successfully.

F. Delete fingerprint(2 Ways):

1.Enter "User Management" interface -click "0 admin"- "Fingerprint management"- "fingerprint 1"-click delete icon, and 1 fingerprint is deleted successfully.
2.Unlock smart lock, press and hold fingerprint sensor by ADMINISTRATOR fingerprint for 8 seconds - The blue indicator light turns on and immediately turns red. Press once with the registered fingerprint to be deleted, and all fingerprints are deleted successfully.

Resetting:

Please read "F. 2" instruction.

NOTE:

1.Before using this lock for the first time, please log in the App to register the account and bind it, and then register the administrator's fingerprint through the App.
2.Be sure to restore factory default mode if you need to return it. Please refer to the complete manual in the App.



FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.