


RGB LED WALL WASHER LIGHT

This is a 108W RGBW Non-dimmable LED wall washer lights are IP65 waterproof color changing with 7 colors, 3 light pattern. It is easy to operate with RF remote. These LED lights provide a great solution to decorate both indoors and outdoors. Create a magical lighting experience for your home, party, wedding, Christmas, TV Backlighting, balcony, party, patio, automobile, even around and behind artwork in your home. Decorate your cubicle at work or use it to impress visitors to your restaurant or shop or other events.



RF REMOTE CONTROLLER


- 360° free control Up to 98FT control range.
- Memory function, saving your last setting.
- Control multiple lights at the same time.
- No need to aim at the receiver, even penetrate walls and doors.
- Please keep 3-5 second, then change next color or mode.

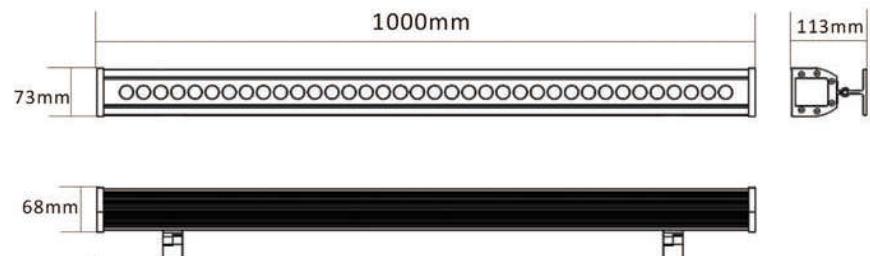

MODEL DIMENSIONS


INSTALLATION GUIDE (Wall Mounting)

Versatile Mounting Options With 180-degree Bbracket: Wall Mount, Pedestal Mount and Ceiling Mount




1. Drill The Holes

Mark the positions of the holes with the flood light bracket, then drill the fixing holes.




2. Drive In the Bolts

Drive in the bolts to the pre-drilled holes with the thread outside.



3. Place The Fixture

Make the bracket face tightly against the wall through the thread. Then fasten the screw clockwise with the hardware wrench.

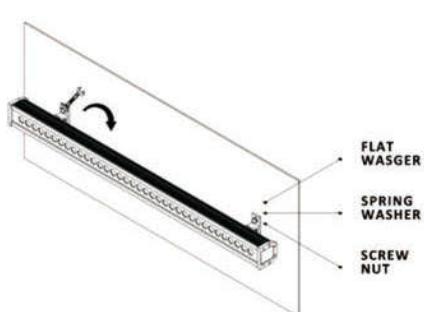

4. Rotate And Fasten

Rotate the light to the desired angle and fasten the screws. Fasten the screws on both sides with hex key.

SPECIFICATIONS

- Wattage: 108W
- Color temperature: Red, Green, Blue, White (not pure), Yellow, Cyan, Purple
- Light beam: 45°
- Input: 90-277V 50/60Hz
- Cable length: 4.92ft
- Waterproof rating: IP65 (DO NOT submerge it into the water)
- Working Temperature: -25°C ~ 40°C
- Plug: standard US 3-plug
- Control distance: UP to 98FT
- Working Time: 50,000 Hours
- Lighting up time: Instant on Lighting, no warming up time
- Mounting Options: Wall Mount, Pedestal Mount and Ceiling Mount
- Bracket Angle: 180-degree
- Materials: Die Cast Aluminum housing + Strong glass+ Heavy Duty Power Cable
- Dimmable: No
- Surface color: Black

WARNING

Risk of electric shock, Disconnect main power at fuse or circuit breaker before installing.

WARM TIPS

1. Secure this product from adverse weather conditions by inserting it firmly into the ground.
2. Plug isn't waterproof, please keep it dry when in use.
3. Don't submerge the wall washer light under water.
4. This wall washer light is including the white color, but it is not pure, it is a mixture of RGB colors.
5. More suitable for decoration, various holidays, landscape lights, not suitable for general lighting.
6. This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.
7. If you have any problems or receive the defective lights, please feel free to send email to us. We will solve your problem within 24 hours.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.