


Please read the user manual carefully before starting to use the product

Model:V12

User Manual V1.0



Scan QR code to get newest electronic user manual



-01-

Structure



Camera Features

1. Real-time recording: This function needs to be enabled in the APP. When this unit senses a movement, it will take a snap and push a notification to your phone.
2. Loop Recording: When the memory card is full, it will automatically cover the oldest clips.
3. Support micro SD card up to 128GB (SD card was not included in the package).
4. Compact size, you can take it to anywhere you want.
5. Nine kinds of lens' decorations, easy to disguise.

Camera Button Instructions:

ON/OFF Button: Push "ON/OFF" button to the "ON" position, then the indicator will be lighted up, it means this camera has been turned on.

Reset Button: Push "RESET" button for 6 seconds, it is recording or standby mode, then the indicator light will go off, it means reset is successful.

Indicator Lights of Camera:

Reset	Blue and red light turn on
Local hot spot connection	Red light flashes, blue light stays on
WiFi Remote connection	Blue and red light stay on
Charging	When charging, the orange light will be on, and when fully charged, the orange light will be off

-02-

Download the "minicam" App:
For Android system: Please search "minicam" to download on the "Google Play".
For iOS system: Please search "minicam" to download on the "App Store".
Besides, you can scan the corresponding QR code below to download it.




Android system



iOS system


Operation Steps:

1. Turn on the camera.
Push "ON/OFF" button to the "ON" position, then the indicator will be lighted up, it means this camera has been turned on.
2. Connect the camera's WiFi hotspot via your phone:
Tap WiFi settings on your phone, search for this camera's WiFi hotspot (named after its model number), then tap it to connect to the camera's WiFi hotspot. Please refer to the back of camera's phone. Please refer to the below pics.

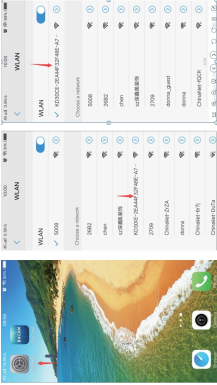


-03-

3. Set Local Connection (point-to-point live streaming mode):
Enable the "minicam" APP, it will automatically search the camera, and then tap (Confirm) to finish the connection.
- 3.1 If it doesn't automatically add the camera, please tap the "+" button for manual adding. Please refer to the below picture.



- 3.2 And then tap the (VLAN) search device. Please refer to the below picture.




- 3.3 Tap (Add) to enter next step. Please refer to the below picture.

4. Set remote connection:
Tap the setting icon >>> Tap "Network configuration" >>> Select your router's WiFi password >>> Tap "Confirm" to finish setting remote connection. Please refer to the below pic.

Tip: Under the local connection, the camera's WiFi hotspot is valid within 10 meters. When your phone is out of the range, it will disconnect and you will not be able to watch the camera's live streaming.

-04-

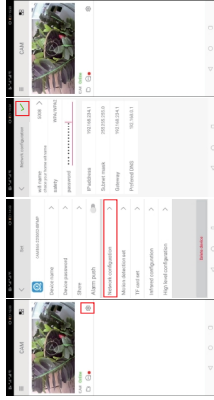


5. APP icons instructions. Please refer to the below picture.




-05-

6. APP Operation Instructions:
6.1 Motion Detection: Tap the "Mimic" app on your phone--> Tap "Setting" icon--> Tap "Motion detection set" to set up and choose the sensitivity of the motion detection. Please refer to the below pics to set up this function.

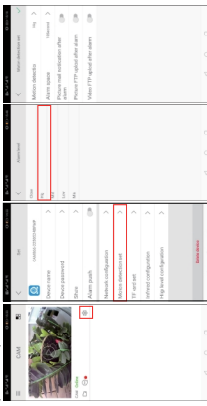


6.2 Motion detection interval alarm is 10-60 seconds, you can set the interval alarm time yourself.

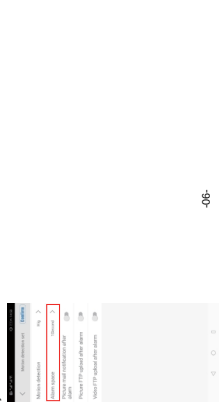


6.3 After triggering the motion detection alarm, if a TF card is inserted, it will automatically save 5 pictures. If you don't insert a TF card, you can enter the app page on the main page of the app to view it. For detailed operations, please refer to the following pictures.




6.4 Use another phone to watch live view simultaneously, share it with your family. If you need more devices to access this camera, you can share this QR code to the devices. Then tap the app in another device, click +, click Add device manually, click Scan QR code, scan the shared QR code, please refer to the below pictures.

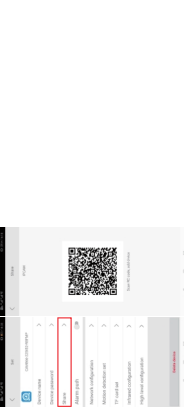


6.5 Play online and download files from memory card:
Tap the home page icon and click the videos you need to watch or download. You can view it online or download it to the phone pic.

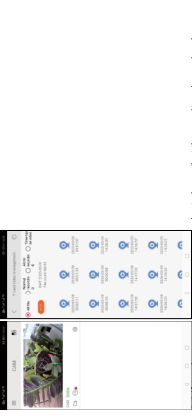

6.6 If you have more than 1 camera, in order to know that the monitored area has been invaded, you can set the camera name to the corresponding scene. Please refer to the below pics.

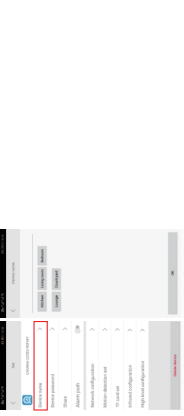

Note:
1. This camera only supports 2.4GHz WIFI, does not support the 5GHz network.
2. Please insert a micro-sd card (not include) to save recordings.
3. If the memory card is brand new, please format it before using it.
4. The camera can't save videos without an sd card but won't affect other functions.
5. The camera will not work if the temperature is too high or too low.
6. The camera will not work when you have used it for a while. This is a normal phenomenon. But do not use the camera under a high-temperature circumstance.
7. When you can't hear the voice, please check whether the voice button is enabled or not. If not, please click the voice button to turn it on. You can refer to the below pics.

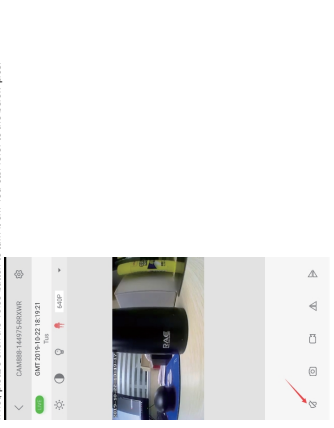

Problems and Solutions:

Problems	Solutions
Can't turn on the camera	History power is exhausted, please charge it
Unable to read memory card	Please format the sd card before using
Unable to connect to the camera	Please make sure the WIFI password is correct
Unable to operate remotely	Click the search button on the app to search the camera or restart the app

Other problems and solutions:
1. The camera is not working properly, please enter the right account or password.
2. The router has not been allocated for too long to allocate IP address.
3. Near the router within 3-5 meters to set remote connection, the device connected to the router has reached the limit or not, if so, please close other devices and then re-connect this camera.
4. The camera is in the WEP encryption mode, please change to the WPA mode.
5. Before setting remote connection, please make sure you have set local connection successfully.

Product Parameter:

Video Resolution	1280*720/640*480/Optional
Video Frame Rate	12/24
Video Encoding	H.264
Frame rate	15FPS~20FPS Optional
Storage	CMS/CSN
Storage Capacity	Support TF card, maximum support 128G
Recording time	Support 128G TF card, maximum support 128G
Supported System	Windows IOS Android
Battery Charge time	2-3 hours
Charging Voltage	DC5V1.1A
Power Consumption	1280*720/640*480/Optional

Warnings

1. Applicable Occasion: Please strictly abide by relevant national laws and regulations.
2. Do not use the product illegally, otherwise, the consequences are at your own expense.

Warranty and Money Back

1. Camera comes with 12 months Warranty or Replacement and 30 days money back.
2. For replacement, you should return the defective camera to us, tell us the defective reasons and provide your order ID for us. -10-