Bluetooth Boombox

User's Guide for Model No. IBC233 v3075-01

Important Safety Instructions

- Read these Instructions Keep these Instructions Heed all Warnings.

- · Follow all instructions
- Do not use this apparatus no
 Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- manuracturer's instructions.

 Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

 Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- your outlet, consult an electrician for replacement of the obsolete outlet.

 Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

 Only use attachments/accessories specified by the manufacturer.

 Unplug this apparatus during lightning storms or when unused for long periods of time.
- periods of time.

 Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart i used, use caution when moving the cart/apparatus combinatio to avoid injury from tip-over.



FCC Statement
This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protect against harmful interference in a residential installation. This equipment generales, uses and cradiate radio fleepuncy energy and, in to installed and used in accordance with the instruction may cause harmful interference to radio communications. However, there is no guarantee that interference with not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

**Recrient or relocate the receiving antenna.

- connected.

 * Consult the dealer or an experienced radio/TV technician for help.
 Caution: Any changes or modifications to this device not explicitly approved by manufacturer
 could void your authority to operate this equipment.
 This device compiles with part 15 of the FCC Rules. Operation is subject to the following two
 conditions; (1) This device may not cause harmful interference, and (2) this device must accept
 any interference received, including interference that may cause undesired operation.

ally americans consistence of the property of

Additional Warnings and Precautions

- CAUTION: TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.
- Mains plug is used as disconnect device and it should remain readily operable during intended use. In order to disconnect the apparatus from the mains completely, the mains plug should be disconnected form the mains socket outlet completely.
- ounce compretely.

 WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain, moisture, dripping, or splashing.
- apparatus to tant, moisture, enriphing, or spiasning.

 CAUTION: Use of controls or adjustments or performance of procedures other than those specified may result in hazardous radiation exposure.

 WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- the equipment.

 WARNING: Do not place this unit directly onto furniture surfaces with any type of soft, porous, or sensitive finish. As with any rubber compound made with oils, the feet could cause marks or staining where the feet reside. We recommend using a protective barrier such as a cloth or a piece of glass between the unit and the surface to reduce the risk of damage and/or staining.
- WARNING: Use of this unit near fluorescent lighting may cause interferen regarding use of the remote. If the unit is displaying erratic behavior move away from any fluorescent lighting, as it may be the cause.
- WARNING: Shock hazard Do Not Open.
- Caution and marking information is located at the rear or bottom of the
- Objects filled with liquids, such as vases, shall not be placed on the apparatus
- Objects filled with liquids, such as vases, shall not be placed on the apparatus. Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

 CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.

 WARNING: There is a danger of explosion if you attempt to charge standard Alkaline batteries in the unit. Only use rechargeable NiMH batteries.

 Battery shall not be exposed to excessive heat such as sunshine, fire, or the like.

- Do not mix old and new batteries
- Completely replace all old batteries with new ones
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc) batteries.
- Batteries should be recycled or disposed of as per state and local guidelines. This product meets and complies with all Federal regulations.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

This product meets and complies with required Federal product guidelines



This product utilizes a Class 1 laser to read Compact Discs. This laser Compact Disc Player is equipped with safety switches to avoid exposure when the CD door is open and the safety interlocks are defeated. Invisible laser radiation is present when the CD Player's lid is open and the system's interlock has failed or been defeated. It is very important that you avoid direct exposure to the laser beam at all times. Please do not attempt to defeat or bypass the safety switches.



Warning: To reduce the risk of electric shock, do not remove cover (or back). No user-serviceable parts inside. Refer servicing to qualified service



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol indicates that this product incorporates double insulation between hazardous mains voltage and user accessible parts.


WARNING: DO NOT INGEST BATTERY, CHEMICAL BURN HAZARD.

FEATURES AND CONTROLS

- Supports Bluetooth v5.0
- Supports Enhanced Data Rate (EDR)
- Supports profile A2DP (Advanced Audio Distribution Profile)
- Built-in stereo speakers
- Built-in FM wire antenna

- Digital FM radio (PLL)
- CD player: CD, CD-R/RW
- Top-load disc player
- Programmable tracks
- Repeat 1 or ALL play 3.5mm audio input

- Digital volume control
- LCD display with white backlight
- AC power: built-in AC power cable
- DC battery power:
 - requires 6 C batteries (not included)
- Battery life: approx. 6 hours audio

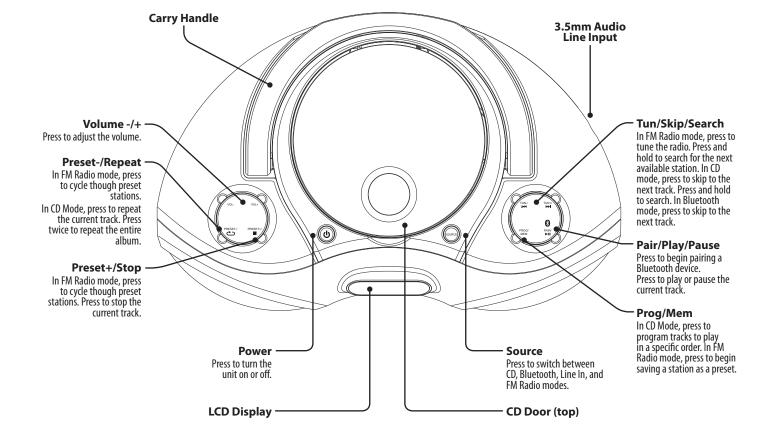








POWER & BATTERY

Plug the power cord into a standard AC power outlet to power the unit. This unit requires 6 C-size, batteries (not included) for battery power.





BLUETOOTH SETUP

Pairing a Bluetooth Device for the First Time

- Press the Source button to switch to Bluetooth Mode. "bt" will flash on the display.
- 2. When pairing, remain within 3 feet of the unit.
- 3. If the unit does not automatically begin to pair, press the **Pair** button.
- Using the native controls on your Bluetooth device, select the IBC233 in your Bluetooth settings to pair.
- 5. If your device requests a password, enter the default password **0 0 0 0**.
- Refer to the user's manual for your specific device for instructions on pairing and connecting Bluetooth devices. When successfully paired, the display will stop flashing.
- After initial pairing, the unit will stay paired unless unpaired manually by the user or erased due to a reset of the device.
- 8. If your device should become unpaired, follow the above steps again.
- If any pairing issues should occur, un-pair the unit on your Bluetooth device and follow the above steps again.

Playing Audio Wirelessly

- To select, play, pause or skip a track, use the native controls on the connected Bluetooth Device, or press the Pair/Play/Pause or Tun/ Skip/Search buttons.
- 2. Audio played through the connected Bluetooth device will now be heard through the speakers.

CD

Note: This unit is not compatible with MP3 CDs.

Loading and Playing a CD

- Open the CD door and place a CD in the boombox, label side facing up.
- 2. Close the CD door.
- 3. Press the Source button to select CD mode.
- Press the Play/Pause button to begin playing the loaded disc.

Programming a CD

- 1. Press the **Prog/Mem** button.
- Press the Tun/Skip/Search buttons to select a track.
- 3. Press the **Prog/Mem** button to save the track to the program.
- Repeat step 2 and 3 until the desired number of CD tracks are programmed.
- 5. Press the **Play** button to begin playing the program.

LINE IN

Using the Line In

3.5 mm audio input cable not included.

- Plug one end of a 3.5 mm audio input cable into the **Line In** input on the back of the unit, and plug the other end of the cable into the audio output on an MP3 Player or other audio source.
- 2. Press the **Power** button to power the unit on.
- 3. Press the **Source** button to select **Line In** mode.
- Audio played through the connected device will now be heard through the speakers.

RADIO

Tuning the FM Radio

This unit is equipped with an internal FM radio antenna. To improve radio reception, adjust the position of the boombox.

- Press the Source button to switch to FM Radio mode.
- Press the Tun/Skip/Search buttons to tune the radio manually, press and hold to search for the next available station.

Saving a Station as a Preset

- 1. Press the Prog/Mem button.
- 2. Press the **Tun/Skip/Search** to select a preset number. Up to 20 stations may be preset.
- 3. Press the **Mem** button to save the current station to the selected preset.
- Press the Preset-/Repeat and Preset+/Stop buttons to cycle through saved presets.

INTERNATIONAL SUPPORT

To download this User's Guide in English, Spanish, or French, or to get answers to frequently asked questions, visit the support section at: **www.iLiveElectronics.com**

Para descargar este Manual del Usuario en inglés, español y francés, o para obtener respuestas a preguntas frecuentes, visite la sección de apoyo en: **www.iLiveElectronics.com**

Pour télécharger ce guide de l'utilisateur en anglais, espagnol ou français, ou pour obtenir des réponses à des questions fréquemment posées, consultez la rubrique d'assistance sur: **www.iLiveElectronics.com**

For Warranty Information and the most up-to-date version of this User's Guide, go to www.iLiveElectronics.com

 $\textbf{Customer Service: } 1\text{-}888\text{-}999\text{-}4215 \ | \ \textbf{Email Support:} \ prodinfo@dpiinc.com \ | \ \textbf{Email Parts:} \ parts info@dpiinc.com \ | \ \textbf{Customer Service: } 1\text{-}888\text{-}999\text{-}4215 \ | \ \textbf{Email Support:} \ prodinfo@dpiinc.com \ | \ \textbf{Email Parts:} \ parts info@dpiinc.com \ | \ \textbf{Email$

 $Copyright © 2013 \ Digital \ Products \ International \ (DPI, Inc.) \ All \ other \ trademarks \ appearing \ herein \ are \ the \ property \ of their \ respective \ owners. \ Specifications \ are \ subject to \ change \ without \ notice.$







