


# PRODUCT INSTRUCTIONS


WIRELESS CHARGER+  
BLUETOOTH SPEAKER·RADIO·NIGHT LIGHT

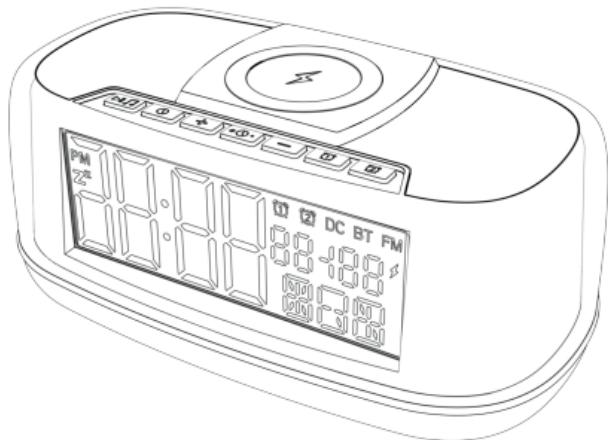

Thank you so much for choosing our product,  
please read the manual carefully before using the product.

## Features

1. Short press to  power on, short press three times in a row to  power off.
2. Qi-compatible wireless charging.
3. Bluetooth connectivity for phone time sync.
4. Displays date, week, time, alarms and snooze.
5. Integrated Bluetooth speaker and radio.
6. 50%/100% Warm White + Colorful Light + Single Color Light.
7. Built-in 2000mAh battery, power-off battery life, keep alarm setting data.

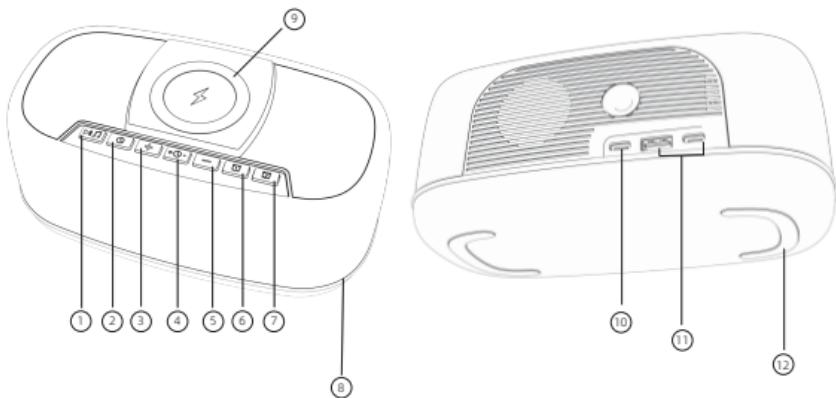



① Power on/off and play button	⑦ Alarm 2 setting key
② Clock setting key	⑧ Night light touch switch
③ Volume + key	⑨ Wireless charging sensing area
④ Mode switch key/brightness key	⑩ Power input port
⑤ Volume - key	⑪ USB/Type-C output
⑥ Alarm 1 setting key	⑫ Silicone non-slip mat

## Light Settings

1. Tap the Silver Ring (snooze/light mode) for successive light modes: 50% Warm White, 100% Warm White, Color Marquee Light, Breathe Gradient Light and Turn Off Light, Long Press to Exit and Hold Current Light Mode.

## Music/Clock Syns Settings

1. The music function is off by default, and the “\*O•” mode button is turned on by short press (a prompt sound will be issued, the BT indicator icon will flash quickly, and it will be bright and sound after pairing); The second short press to switch to FM radio mode (the FM icon is always on, you can start FM); Short press for the third time to turn off Bluetooth/FM mode.
2. The BT indicator icon lights up when the music function is turned on (within 10 meters of the BT signal distance, if there is no connected device, the BT icon flashes).
3. Pair with W608 on your phone bluetooth and tap agree for the pop-up notification to ensure success of connection.

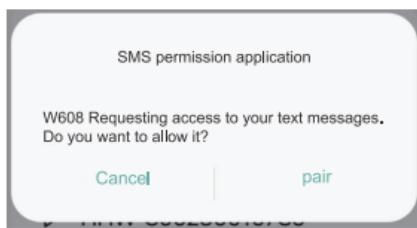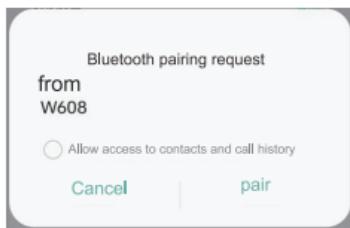

4. Select a song to play music, and short press the “▶|| ↴” play button to pause or resume playing music.
5. Volume adjustment via “+” and “-” button.
6. Switch music by long press “+” and “-” button.
7. Bluetooth indicator will flash again if disconnected.
8. Double press “▶|| ↴” Play/Pause button to reset bluetooth.

## Display Brightness Settings

1. Display will stay on high brightness as first time powered on. Long press the “\*○•” display brightness button to set on high, medium, low and off.

## Clock Settings

1. Long press the “⌚” clock button (for about 2 seconds) to enter the clock settings. The 12/24 display part will blink. Press the “+” or “-” button briefly to select the 12/24-hour format.
2. Press the clock button again briefly to set the year, month, day, hour, and minute in sequence (the corresponding status indicator icon will turn on/off). Press the “+” or “-” button to change the blinking displayed value. Press and hold the “+” or “-” button to quickly increase or decrease the value continuously.
3. After the settings are complete, press the clock button briefly again to exit the settings mode.
4. If there are no button presses for 30 seconds during the setting process, the system will automatically exit the settings mode and return to the clock state.
5. Press the clock settings button briefly to toggle between 12/24H.

## Alarm Settings

1. Press the “⌚” Alarm 1 button briefly, then press and hold for 2 seconds to enter Alarm 1 time settings. The hour display will blink. Press the “+” or “-” button to change the blinking displayed value. Press and hold “+” or “-” to quickly increase or decrease continuously.

2. Press the “” Alarm 1 button briefly to enter Alarm 1 minute settings. The minute display will blink. Press the "+" or "-" button to change the blinking displayed value. Press and hold "+" or "-" to quickly increase or decrease continuously.
3. Press the “” Alarm 1 button briefly to enter Alarm 1 volume settings. The volume value display will blink. Press the "+" or "-" button to change the blinking displayed value. Press and hold "+" or "-" to quickly increase or decrease continuously (with the alarm sound emitting simultaneously).
4. Press the “” Alarm 1 button briefly to save and exit Alarm 1 settings.
5. The method for setting the time and volume of Alarm 2 “” is the same as Alarm 1 “”.

### Alarm On/Off

1. Tap alarm 1/2 button to enter alarm 1/2 interface, tap again to turn on/off alarm 1/2.
2. Alarm clock 1/2 icon will be displayed when turned on.
3. Short press "+" or "\_" to adjust volume during alarming.
4. Stay over 3 seconds will automatically quit setting mode.

### Snooze Function

1. Touch the Silver Ring during alarming to snooze for 9 minutes. Alarm repeats up to 6 times. Press alarm button to cancel snooze.

## Wireless charger

1. Place the phone or device that supports Qi wireless charging protocol in the center of the non-slip pad. When charging normally, the charging indicator icon will light up. If the icon is flashing, it indicates a malfunction. Check if there is any metal object attached to the center of the non-slip pad.
2. The product can support a maximum wireless charging output of 15W.

## USB output

1. Supports both USB-A and TYPE-C output port.

MADE IN CHINA



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.