



GTPLAYER

ASSEMBLY INSTRUCTIONS



READ THIS MANUAL

Do not use this product until you read and understand the instructions in this manual.

KEEP THIS MANUAL FOR FUTURE REFERENCE.

This manual is intended for installation and use. The pattern should be subject to the product you receive.

 **GTPLAYER**

E-mail: us@gtplayer.com


www.gtplayer.com

Version: 2022.07.21

01

Check All the Accessories Accessory Details

Please check and ensure all the things are in the package.
You can contact us for help if something is not included.

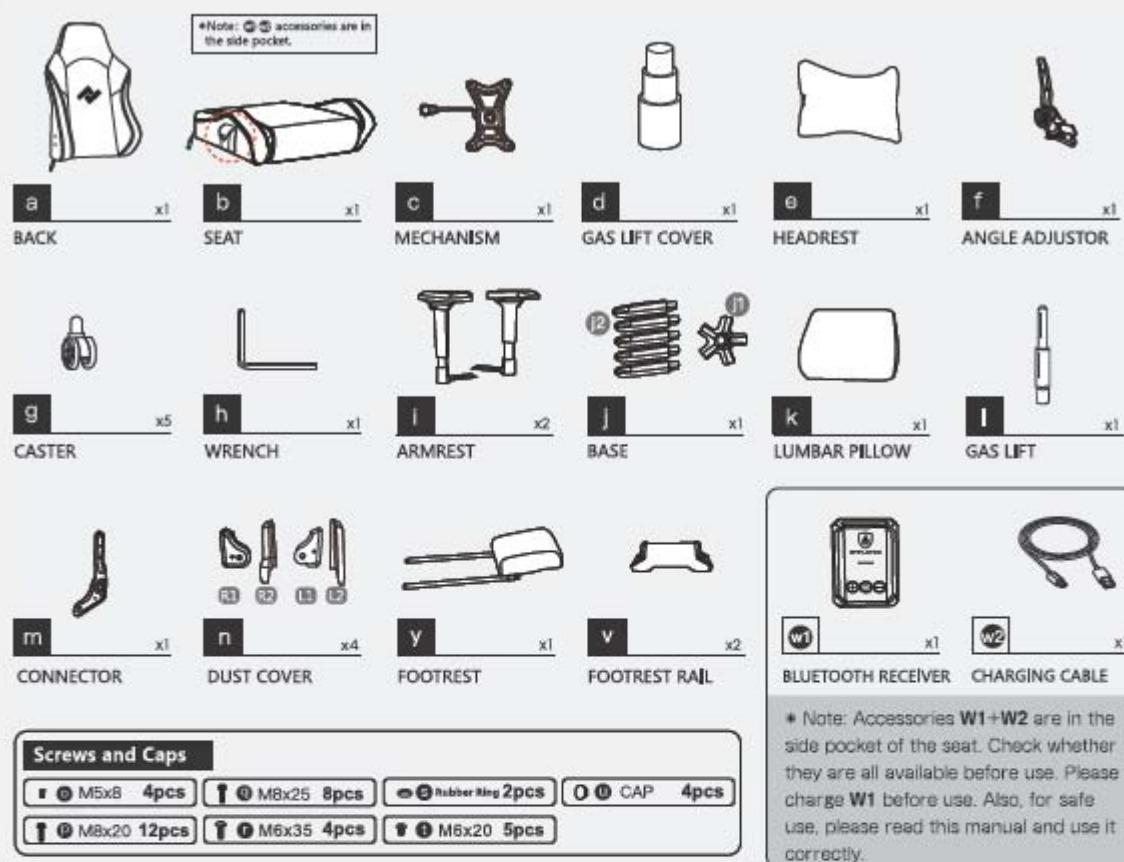


02


Instructions Before Using Chair Installation

Please keep the original box in case you might need to return or replace the product.


1 Combine j2 and j1 with **t** (5pcs) screws.

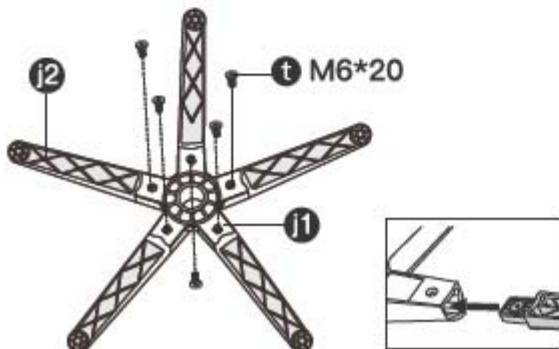

2 Insert the casters. Install the gas lift and insert the gas lift cover.

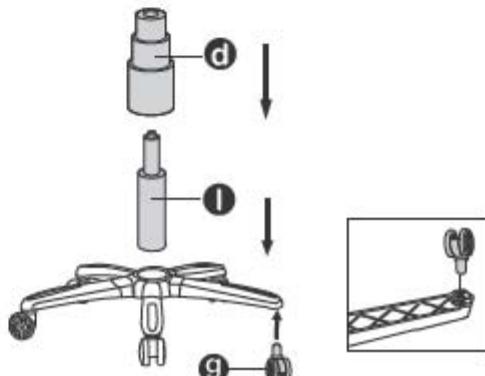


3 Install the mechanism, armrests and footrest rails.

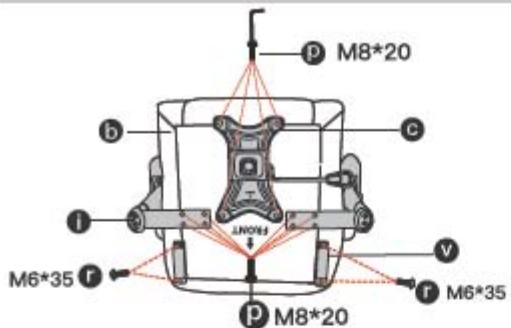


Attention

DO NOT tighten all the screws completely until they are fixed in the correct position.

4 Place the seat on the gas lift.

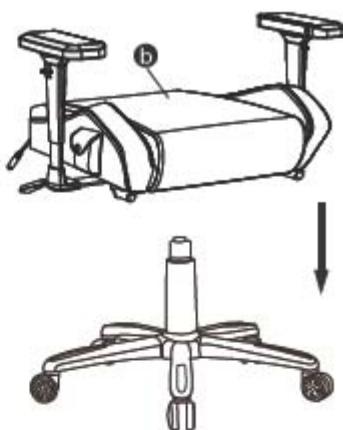


5 Install **f** & **m** on the seat and back.

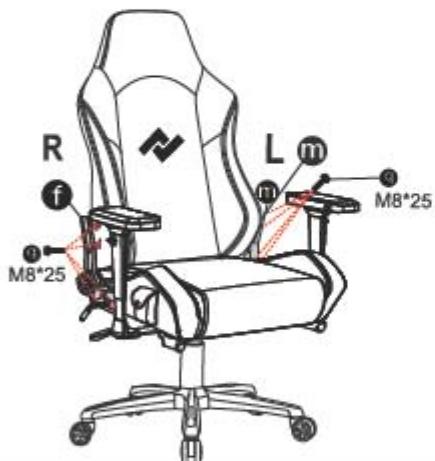


Attention

DO NOT tighten all the screws completely until they are fixed in the correct position.



① First install **f** & **m** on the seat.

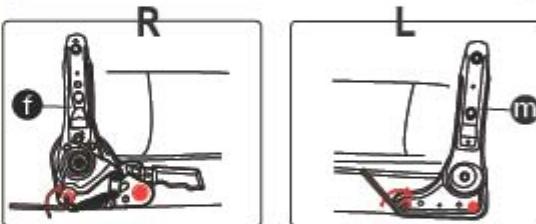



② Then install **f** & **m** on the back.

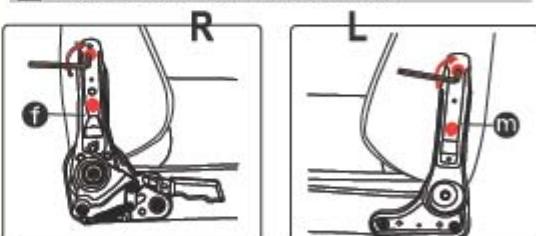

6 Put M5*8 screws through the holes of **n** & **p** and tighten them, and then put the caps on.



7 Install **q** & **r** with M5*8 screws, and then put the caps on.



8 Attach the headrest and lumbar pillow.



9 Install the footrest on the footrest rails.



Frequently Asked Questions:

Q: Why do I hear a creaking sound after using this chair for a period of time?


A: Check where the noise comes from.

- Disassemble the mechanism, and then reinstall it with the screws tightened;
- Tighten the 8 screws of the angle adjustor and connector.

03 Instructions For Use Functions Display

Please read the function introduction carefully.

A




Tilt angle adjustor

Lift the tilt angle adjustor to recline and release it to any desired position. Lean on back when resetting back to its normal position to prevent hurts from excessive rebound strength of the chair.



B



Turn left or right




Adjust up or down



Move forward or backward



Move left or right


C

Pull upward on lever to achieve height adjustment.



D Bluetooth Receiver User Manual *

01. This chair can play audio through Bluetooth function.

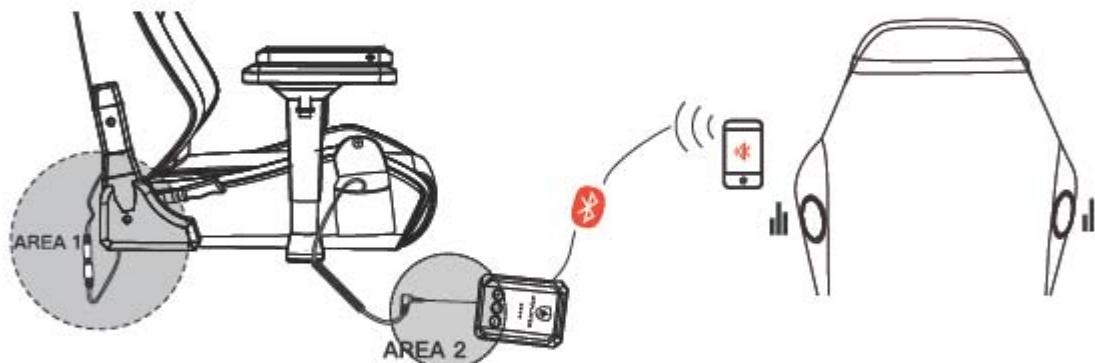

When hearing a click, the cables are properly connected in place.



Note: Please ensure that all audio jacks in the AREA 1 and AREA 2 are properly connected in place, otherwise one side of the bluetooth speakers may not sound.

02. Contents

* ① ② ③ are in the side pocket of the seat.

① Bluetooth Receiver



Vol+ / Next Track ④

② LED Indicator

③ Vol- / Previous Track

① Multi-function Button

⑤ Type-C Charging Port

⑥ Audio Jack

⑦ Audio Jack

④ Charging Cable



⑤ Bluetooth Speakers




03. BASIC OPERATION

(1). Charging

Charge the Bluetooth receiver  with Type-C charging cable  and battery charger (Not included) for about 60min, and it will be fully charged. The LED indicator light flashes blue  when charging, and 4 blue lights  are always on when fully charged. (There are 4 blue lights in total, and one blue light represents 25% battery.)


* Note: This Bluetooth receiver  cannot be used when it is charging.

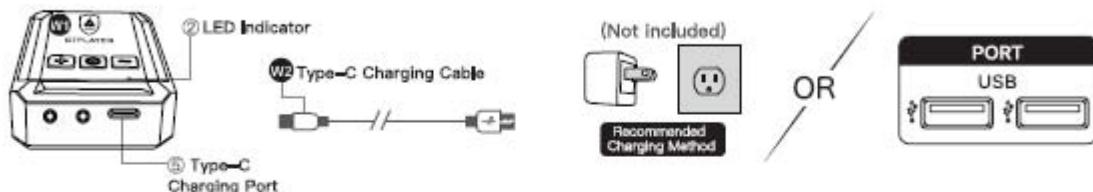

(2). Pair and Connect

Connecting to smartphones and other devices:

1. Long press the multi-function button ① for 2s to turn on the Bluetooth receiver . The LED indicator light flashes red and blue   , and the voice will prompt “POWER ON”.
2. Activate the Bluetooth function on your phone and search for Bluetooth devices. Pair your phone to “GTPLAYER”.
3. After successful pairing, voice will prompt “Connected”.
4. If the connection is broken, voice will prompt “Disconnected”.
5. If there is no connection, the Bluetooth receiver  will automatically turn off after 5 min.
6. After connection, the blue light  will light up. After a period of time, it will enter the energy-saving mode and only one blue light  will be on for a long time.

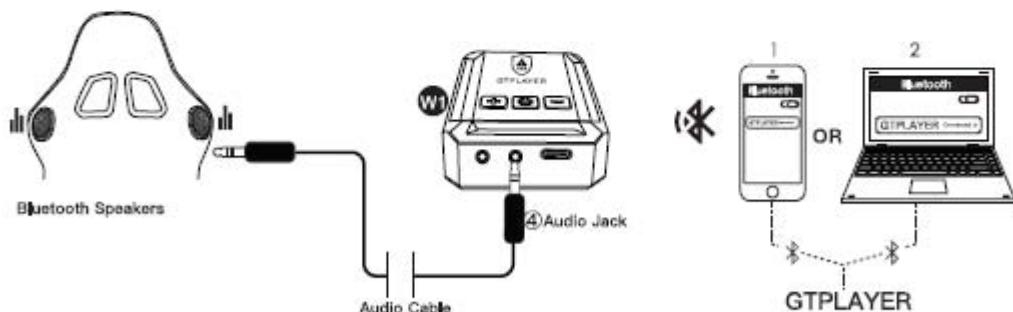

(3). Instructions of Multi-function Button

- 1). Power On — Long press the multi-function button ① for 2s to turn on the Bluetooth receiver  and the voice will prompt “POWER ON”.
- 2). Power Off — Long press the multi-function button ① again for 5s to turn off the Bluetooth receiver  and the voice will prompt “POWER OFF”.

- 3). Connect Bluetooth Receiver  to the Bluetooth speakers, now you can enjoy music wirelessly.
 - 3.1). The music automatically pauses when you dial a phone number or receive an incoming call.
 - 3.2). This Bluetooth music receiver doesn't have a microphone, so you need to switch the call to the mobile phone. The music will automatically play when the call is ended.
- 4). Play Music — Short press multi-function button once to play music.
Pause Music — Short press multi-function button once to pause when playing music.
- 5). Click the multi-function button ① twice to check the remaining battery.

(4). Instructions of "+" / "-" Button

- 1). "+" Button — ① Next track: Press and hold the "+"button for 2s to switch to the next song.
② Vol+: short press the "+"button to adjust the volume.
- 2). "-" Button — ① Previous track: Press and hold the "-"button for 2s to switch to the previous song.
② Vol-: short press the "+"button to adjust the volume.

(5). Bluetooth Receiver Indicator Reference

- [Right 1 light: flashing red and blue ] — Bluetooth pairing
- [Right 1 light: blue light always on ] — Bluetooth connected
- [light flashing blue ] — Charging

(6). Technique Specification

Power Input	USB 5V	Working Frequency	2.402 ~ 2.480ghz
Output Voltage	5V	Working Time	≈16H
Battery Capacity	1000mAh	Wireless Streaming Range Distance	10~15m (No occlusion)
Charging Time	60 min	Support Mobile System	Android / iOS

04. GAIN A COMPLETE INTERCONNECTED EXPERIENCE

?? No Bluetooth transmission function in your device? We recommend

! 「USB Bluetooth Transmitter "GT Lynck"」!



Compatible with Nintendo Switch, Windows7/8/10/11, PlayStation4/5, and other devices to enjoy games, music and movies, "GT Lynck" can be used in a high-quality wireless sound environment. Want to own this product? Please check the "GT Lynck" product information in GTRACING store.

Dear Customer,

Thank you for choosing us.

Has been implementing its brand and design concept "BE COOL BE FREE", GTPLAYER is dedicated to enriching gaming and shopping experience for customers.

For safe use, please read this manual before installation, and keep it for after use. Please feel free to email us if you have any concerns about our products. We'll reply within 24 hours.

The following are the things you need to pay attention to so that we can provide you with services when you encounter problems during the installation and use of the product:

- When the product is damaged due to courier problems, please contact our customer service in time for verification.
- We will rectify the issue as soon as possible;
- We give a 365-day quality assurance;
- We provide a 7-day no-reason return service (Note that the returned product will not affect the secondary sales).

We offer product explanations, installation instructions, product maintenance and maintenance methods.

If you feel satisfied with our product and service,

- Please set our store as your favorites;
- Please recommend our products to your friends;
- Please and leave us your purchase experience in our store or product page.

Feedback or reviews from you will greatly help us offer better services to players around the world.

Best regards!

* ATTENTION! During installation, DO NOT tighten all the screws completely until all the screws are fixed in the correct position.

 GTPLAYER



E-mail: us@gtplayer.com
www.gtplayer.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.