



FUKUMARU

PRODUCT INFO & INSTRUCTIONS

Live together, live better.

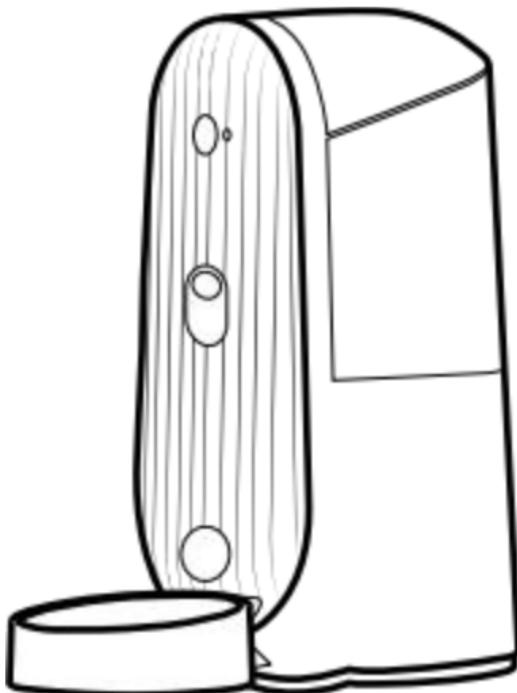

PACKAGE INCLUDED

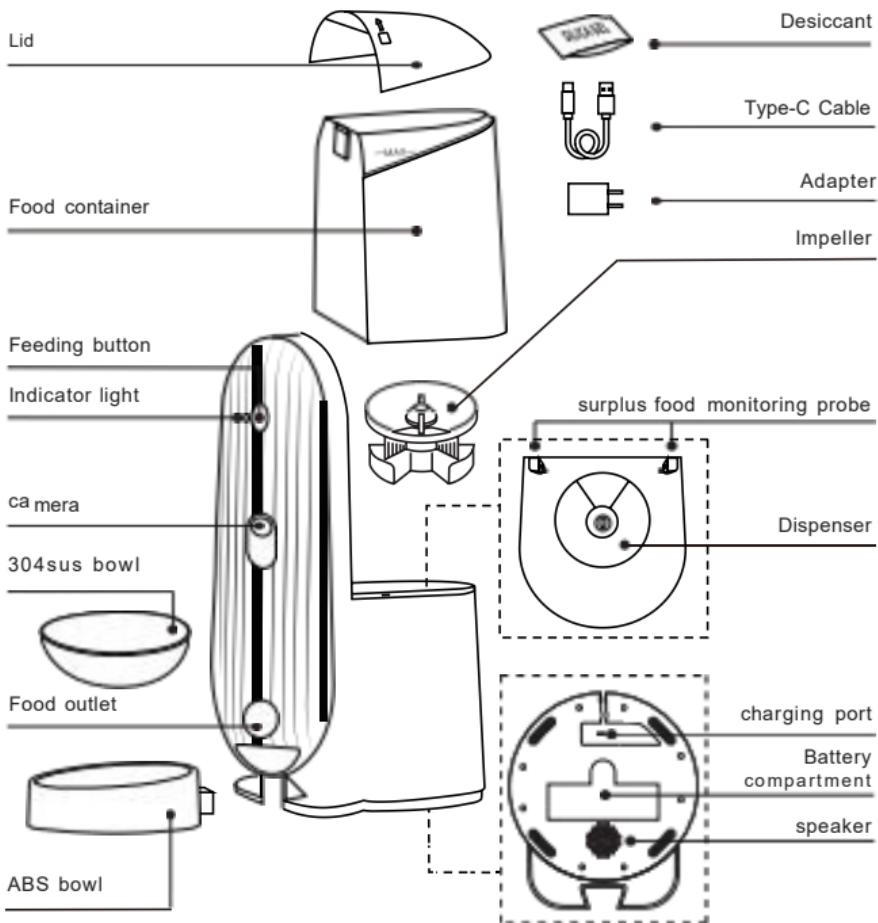

1. please use the qualified DC 5v/1A Power adapter.
2. please use alkaline AA batteries as an emergency plan.
Do NOT Use rechargeable batteries.
3. The batteries are not included.

PRODUCT INFO

Rated input	wireless connection	Material	Food capacity
5V== 1A	wiFi- 2.4GHz	ABS + 304SUS	4L
Applicable group		power supply	
cat and sma ldog		Type-C Cable, 4*AA batteries	

STATUS OF INDICATOR LIGHT

Blue normally on	Blue lashing	Red light is always on	Green light flashing	yellow oight
Normal operation	wiFi connection	Food shortage alert	sending the pet food	Network connection failed

power Supply Mode	WIFI	Remote app control	Auto feeding	power required	use scene suggestion
Battery power only	✓	■	✓	4*AA batteries	Daily at home
wired power only	✓	✓	✓	1*Type-C Cable	
Battery + wired power	✓	✓	✓	4*AA batteries + 1*Type-C Cable	During trip/vacation Daily at home



ATTENTION: In pure battery power mode, to save power, the device will turn off the indicated light and start sleep mode in around 3 minutes, so the APP Shows that it's offline and can't be remotely controlled unless reactivated it by pressing the feeding button and wait 3s to reconnect the app. If the feeding plan has already been set online before, even if it's offline, the device will still auto-execute the feeding plan.

PRECAUTIONS

INTENDED USE

1. This product is an automatic pet feeder with an app to schedule and control the feeding times and number of portions.
2. This product is intended for dispensing dry cat or dog food only.
3. This product works best with food with 2- 15mm / 0.08 - 0.6 inches in diameter.
4. The product is intended for indoor use only.
5. The product is not intended for professional use.
6. Any modification of the product may have consequences for safety, warranty and proper functioning.
7. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety.

WARNING

1. Ensure you have fully read and understood the instructions in this document before you install or use the product. Keep this document for future reference.
2. Only use the product as described in this document.
3. Do not use the product if a part is damaged or defective. Replace a damaged or defective product immediately.
4. Do not drop the product and avoid bumping. To prevent pets from falling down, it is recommended to place the feeder in the corner or against the wall.
5. This product may only be serviced by a qualified technician for maintenance to reduce the risk of electric shock.
6. Do not expose the product to water or moisture.
7. Do not place any foreign objects in the feeder.
8. Do not place anything on top of the feeder.
9. Never immerse the product in water or place it in a dishwasher.
10. Do not expose the product to direct sunlight, naked flames, or heat.
11. Disconnect the product from the power source before service and when replacing parts.
12. Children should be supervised to ensure that they do not play with the product.
13. Only power the product with the voltage corresponding to the markings on the product.
14. Disconnect the product from the power source and other equipment if problems occur.
15. Do not dismantle, open, or shred secondary cells or batteries. Always use a qualified adapter, power cord, and dry batteries.

HOW TO GET STARTED


1

scan the QR Code to watch the installation video. b ■



open the lid.


2

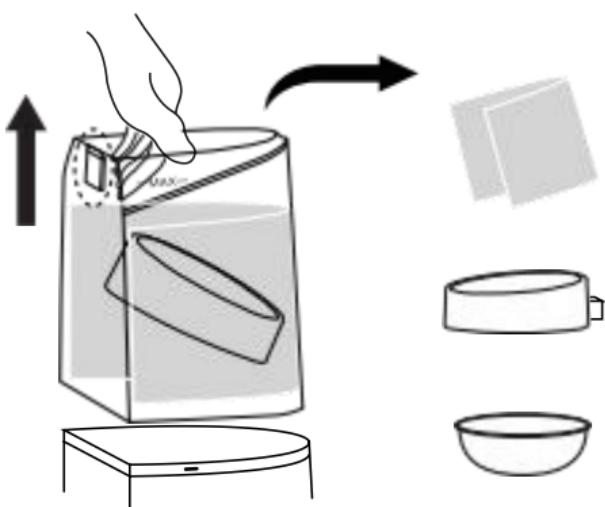


Put out the food container and take bowls and cardboard sheet out.

HOW TO GET STARTED

3

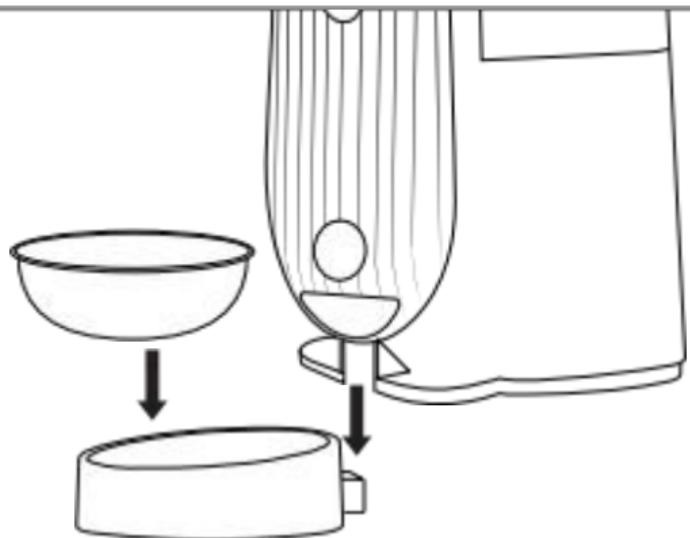


4

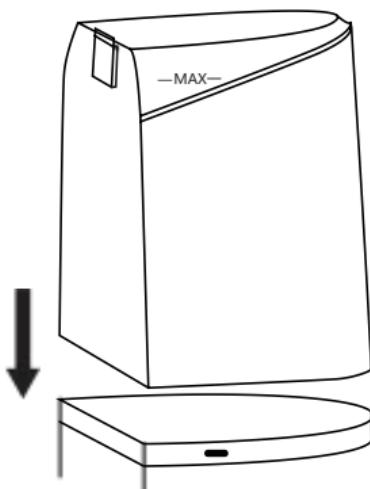

HOW TO GET STARTED

5

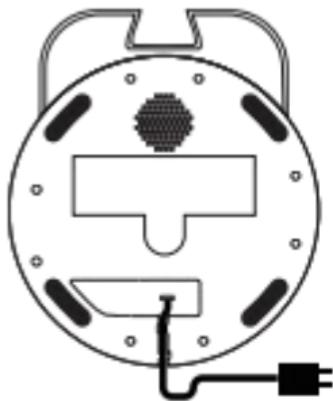



OR



Attention :

- 1. In pure battery power supply mode, the device will enter sleep mode in 3 minutes, and the APP does not support remote control.
- 2. You can also insert 4 AA batteries into the battery compartment as a backup power source, in case of wired power/network failure.


6

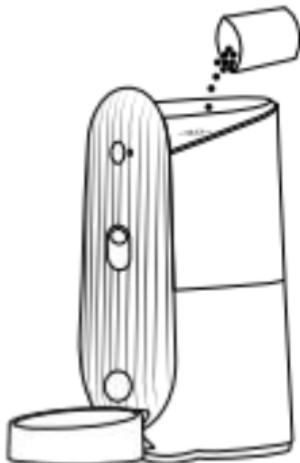


*Allowed kibble size:
Dry food 2-15mm/0.08 - 0.6 inches
in diameter

HOW TO GET STARTED

7

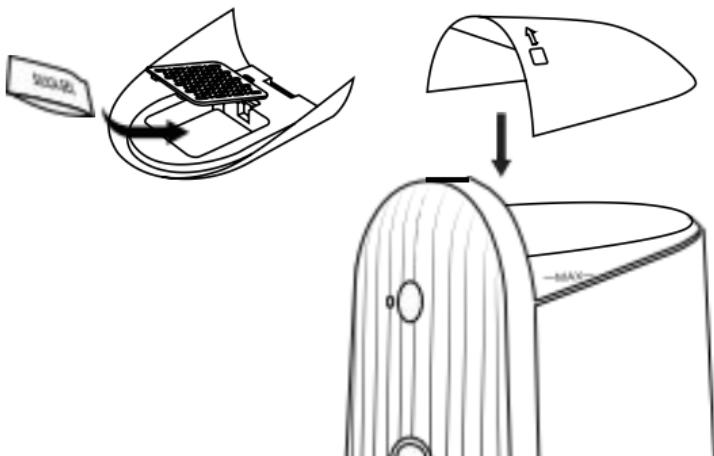

8

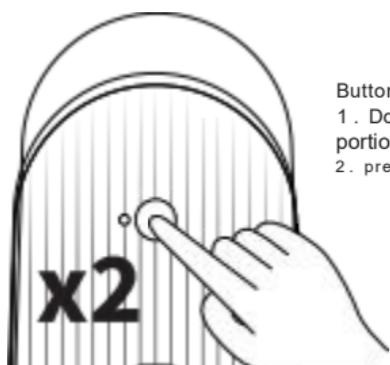

Button usage:

1. Double press to manually feed one portion food(7-12g/0.25-0.42oz) ·
2. press 10s can reset the device.



Attention :

when the food is delivered for the first time, there may be no food or just a small amount on the bowl. please repeat the operation 2-3 times to use it normally.

HOW TO REMOTE CONTROL

APP Download

1. scan the QR Code right with your smartphone.
2. search the 'smartlife' App from the APP Store.




scan to download
'smartlife' .



scan to watch the
instructions video.

Then follow the steps below

1. power on the device. (Note: In pure battery power supply mode, the device will enter sleep mode in 3 minutes, and the APP does not support remote control unless reactivated by pressing the feeding button and waiting 3s to reconnect the app)
2. Make sure the WIFI indicator blue light is fashing. if not, please reset the network configuration/press 5s on the feeding button to reset the device.
3. open the smartlife APP and add the device, folow the app instructions.
4. connect to the 2.4GHz wi-Fi network, and enter the same wi-Fi name and password with your smartphone. (The device doesn't support 5GHz wii yet.)

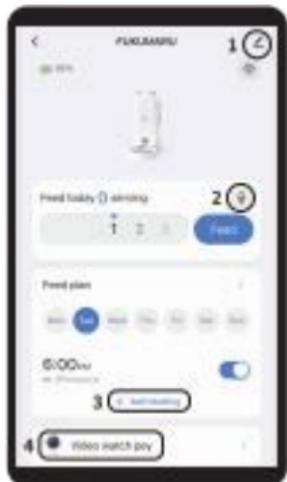

1. set/update the device.
2. Meal call recording.
3. set feeding plan.
4. camera interactive.



5. Listen to your pets' voice
6. Long press to speak to your pets.





7. For a better user experience , please keep the device in the latest version .

CLEANING & MAINTENANCE

1. Always unplug or disconnect the feeder from the electrical supply with dry hands whenever the feeder is being installed, maintained, or handled.
2. Regularly clean the food dispenser with a slightly damp cloth to ensure that kibble is able to be dispensed smoothly. Do NOT Clean the dispenser using water, as this may damage the electrical components inside. Make sure that no water gets into the battery compartment.
3. The food container, and food bowls can be removed from the base and cleaned with running water under the tap. Always dry these parts completely before reassembling the product.
4. The desiccant pad should be replaced every 15 days to ensure an optimal dehumidifying effect. Do not use the desiccant pad if it is visibly damaged.
5. please use a qualified DC 5v/1A Power adapter and power cord.
6. change the batteries every 6 months if not in use for a long time.
7. Do not lift the feeder only with a lid, food container, bowl, or tray. Lift or transport the feeder by holding the food container and base with both hands, while keeping it in an upright position.
8. store the feeder against a wall or corner to avoid tipping.

HOW TO ASSEMBLE THE IMPELLER

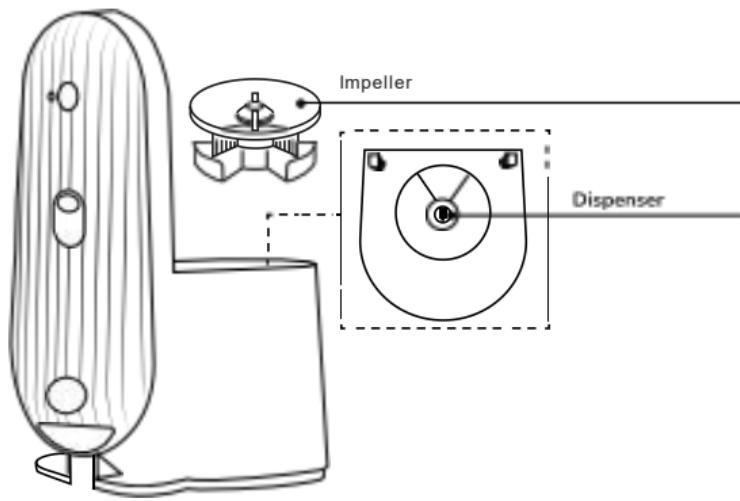

1. Align the shape of impeller buckle with dispenser slot.

2. Align "▲" and "●", press the impeller down and flatten it.

3. Rotate it right to lock, align "▲" and "▼".



Attention: May get food stuck if the impeller doesn't assemble correctly.

WARRANTY

1. 12-month product warranty period.
2. After-sales service provided for product issues caused by non-artificial reasons.
3. For any questions, please contact us via fukumaru@hzdare.com.

TROUBLESHOOTING

. what should I do if I can't connect to the Internet?

1. Make sure the device has been powered on;
2. check if the network is stable, and check whether it is 2.4GHz WiFi;
3. check whether the mobile phone WiFi and Bluetooth are authorized;
4. check whether it is within the network coverage.
5. Try to reboot the router and wait 3 minutes to observe the status of the device;
6. Make sure the home wi-Fi network is working well, or whether the wi-Fi name, password, etc have been modified. If so, reset the device and add it again. (How to remove the device: open smartlife APP and enter the device control page, click '...' button on the top right and corner, click 'Device Management', then choose this device to remove.)

• what about stucking food?

1. clean out the food and check whether the distribution impeller is installed correctly (whether the alignment mark is aligned).
2. check whether the motor is abnormal: put your ears close to the machine to see if you can hear the rotating sound, or pour out the kibbles, take out the impeller, operate the device, and see if the motor rotates

• The APP Shows that it is offline, can it still deliver food normally?

set the feeding plan when the blue light is always on, and then you can feed normally or in or during sleep mode, but the feeding record is not displayed on the APP. After the device wakes up, the APP will display the previous feeding record. when the battery is in use and without wired power, the light goes out, can it still produce food normally?

In the pure battery state, the device will automatically turn off the light in 30 seconds, and will automatically sleep after 3 minutes (at this time, the APP will display that the device is offline). This function is to prolong the battery life without affecting the normal grain output.

• After the network abnormality causes the device to go offline, will the normal device automatically connect to the Internet?

After the network abnormality causes the device to go offline, the device will automatically restart twice. After restarting, the device will detect the surrounding network environment and reconnect to the network. If the device cannot detect the network after two restarts, please check the network server first, and then manually power off and restart the device.

. can it be used without WIFI?


The first startup requires WIFI Connection settings, the feeder only supports 2.4GHz WIFI. It can not support 5GHz WiFi

FQAs

Q: How to reset the device?

A: press and hold the device feeding button for 10 seconds, when the indicator light turns off and you hear a "di", you can connect to the Internet. (please complete the networking within 3 minutes. If the feeder enters the no-network state after 3 minutes, you need to cut off the power supply and then power it on again).

Q: How to record meal voice?

 long press and speak loudly to record voice.	 After recording a period of voice, save and download the voice packet. when the next feeding begins, it will play the recorded voice.
---	--

Q: can this be used for wet pet food?

A: The machine only works with dry food.

Q: can it work for larger dogs?

A: This would be more suited for a small or medium pets.

Q: How many pounds of dry pet food can it hold?

A: This Automatic cat Feeder can hold 4 liters of dry food, it is suitable for cats and small dogs.

Q: Does this feeder work with larger kibble sizes?

A: The grain size applicable to our products is 2-15mm / 0.08-0.6inch in diameter, and please use it with dry pet food only.

Q: what is the maximum portions can food come out per time feeding?

A: 6 portions per time feeding.

Q: How much volume of each portion?

A: Each portion is about 7-12g~0.25-0.420z, which volume varies depending on the density of the food.

Q: How many cups does it dispense a day?

A: 1 portion is about 7-12g~0.25-0.420z. You can set up a feeding plan based on your pet's daily food intake.

Q: How long will the desiccant bag work? where I can buy the replacement?

A: Replace it every 2 weeks. You can buy the desiccant bag on Amazon.

Q: can it run on battery power only without the power plug, or is the battery only for backup in case the power goes out?

A: yes, but we recommended to use it together, so that the feeder can continue to work during power failure or when the battery is dead.

ABOUT FUKUMARU

FUKUMARU Was established in 2016 , which intend to spread the sincere relationship between pets and humans. we aim to build a harmonious pet-human environment in your house through FUKUMARU Products. In adherence with principles of safety, practicality, and sustainability we have established a strict quality inspection and safety test process for each product production, and keep doing our best to enhance consumers' experience.

Im Jahr 2016 wurde FUKUMARU gegründet, um die liebevolle Beziehung zwischen Haustieren und Menschen zu fördern. unser ziel ist es, durch FUKUMARU-Haustierbedarf eine harmonische umgebung für Haustiere und Menschen in Ihrem zuhause zu schaffen. wir legen großen wert auf sicherheit, praktikabilität und Nachhaltigkeit und haben daher für jedes produkteinen strengen Qualitäts- und sicherheitstestprozess, um die höchstmögliche Qualität für unsere kunden zu gewährleisten. wir arbeiten kontinuierlich daran, die Nutzererfahrung für unsere kunden zu verbessern.

FUKUMARU は2016年に設立され、ペットと人間の真摯な関係を広めることを目的としています。FUKUMARUのペット用品を通じて、お家の中でペットと人間の和やかな環境を築くことを目指します。安全性、実用性、持続可能性の原則を遵守し、各製品の厳格な品質検査と安全性テストプロセスを確立し、ユーザーエクスペリエンスを高めるために最善を尽くし続けています。

AFTER-SALE SERVICE

please visit www.fukumarupet.com for more installation and after-sale services.

Bitte besuchen sie www.fukumarupet.com für weitere Hilfe bei der Installation und Kundendienst.

詳しい組み立て法やアフターサービスについては、www.fukumarupet.comをご覧ください。

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This

equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.