

Keyboard Antenna Specification

Antenna overview

1. Antenna Type and Model:

Type: PCB Antenna

Model: PIFA Antenna

2. Gain: about **3.36dBi (peak)**

3. Antenna Directivity Coefficient: about -1 @2450MHz

4. Antenna Polarization characteristic: elliptical polarization

5. Inside or outside: Inside

6. Name of Manufacturer: Shenzhen Qkie Technology Co., LTD(深圳市芯之源科技发展有限公司)

7. Name of Laboratory: Shenzhen Qkie Technology Co., LTD (深圳市芯之源科技发展有限公司)

8. Address of Manufacturer: Room 1006, Shifeng Building, No. 6267, Bao'an Avenue, Qiaotou Community, Fuhai Sub-district, Bao'an District, Shenzhen City

Dongle PIFA Antenna

The Keyboard antenna adopts the ultra-small PIFA antenna, and because of the limited area of PCB, the gain of antenna will be smaller than that of the other antennas. The communication distance can reach about 15 ~ 20 meters. The size of the Dongle Module PCB antenna is 14.404*3.135mm, and the thickness of PCB is 2.6 mm. The specific size of the antenna is shown in figure 1, the physical object is shown in figure 2

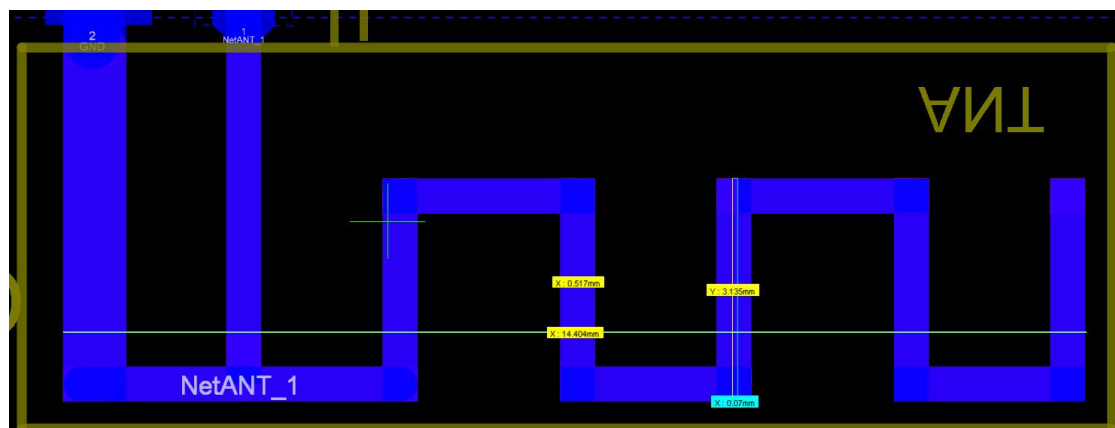


Figure 1 :keyboard Ant



Figure 2 :Keyboard Antenna

The antenna's S11 test data is shown in figure 3, covering the entire 2.4 G frequency band.



Figure 3 keyboard Antenna S11


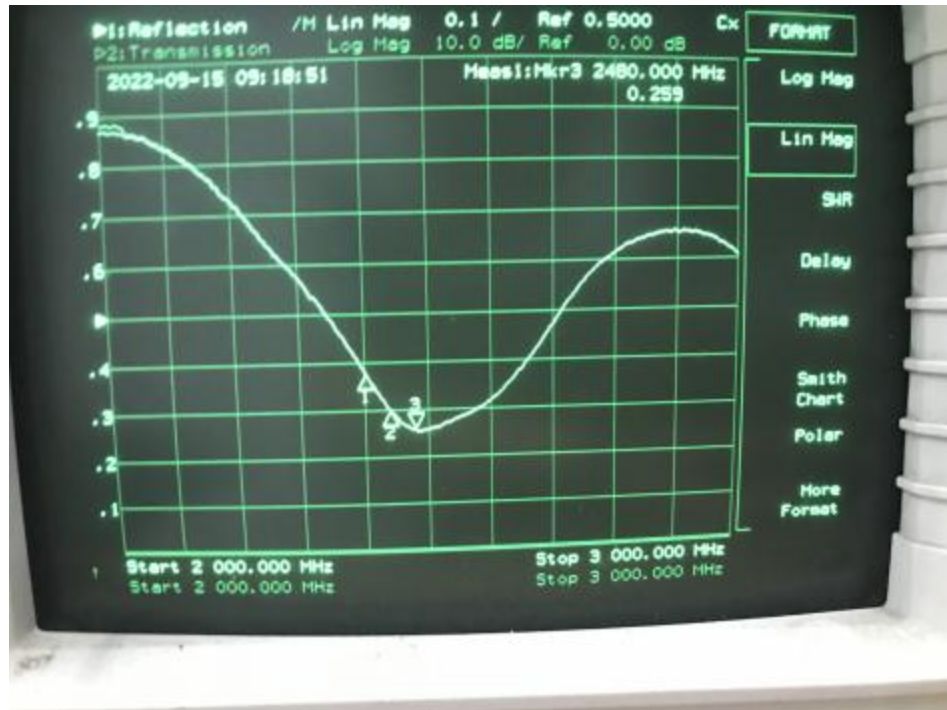


Figure 4 keyboard Antenna S11

The gain simulation data of the antenna is shown in figure 4

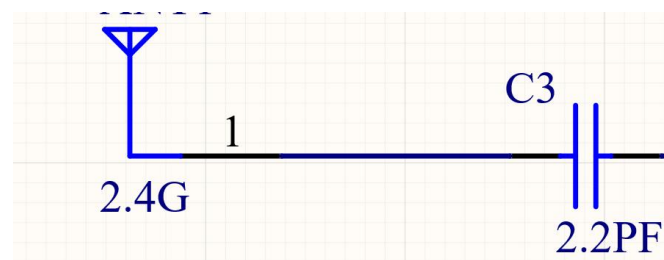

Number	Brand	Value
C8		2.2pF

Channel List-2.4G(MHz)


2402	2404	2406	2408	2410	2412	2414	2416	2418	2420
2422	2424	2426	2428	2430	2432	2434	2436	2438	2440
2442	2444	2446	2448	2450	2452	2454	2456	2458	2460
2462	2464	2466	2468	2470	2472	2474	2476	2478	2480


ANNEX A TEST RESULTS

A.1 Gain and Efficiency


Frequency	Gain (dBi)	Efficiency (%)
2400MHz	3.22	57
2410MHz	3.14	58
2420MHz	3.08	57
2430MHz	3.27	56
2440MHz	3.29	56
2450MHz	3.36	56
2460MHz	3.10	54
2470MHz	2.87	53
2480MHz	2.96	54
2490MHz	2.89	53
2500MHz	2.45	52

1D Radiation Patter

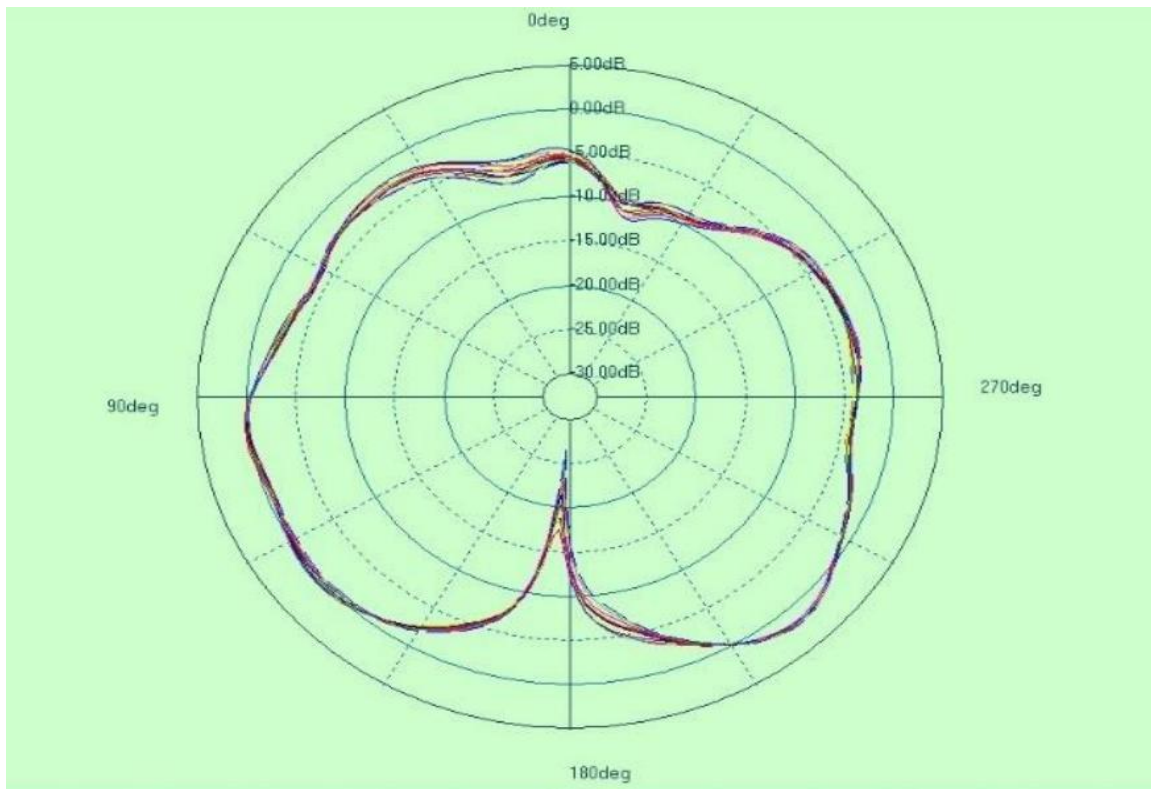

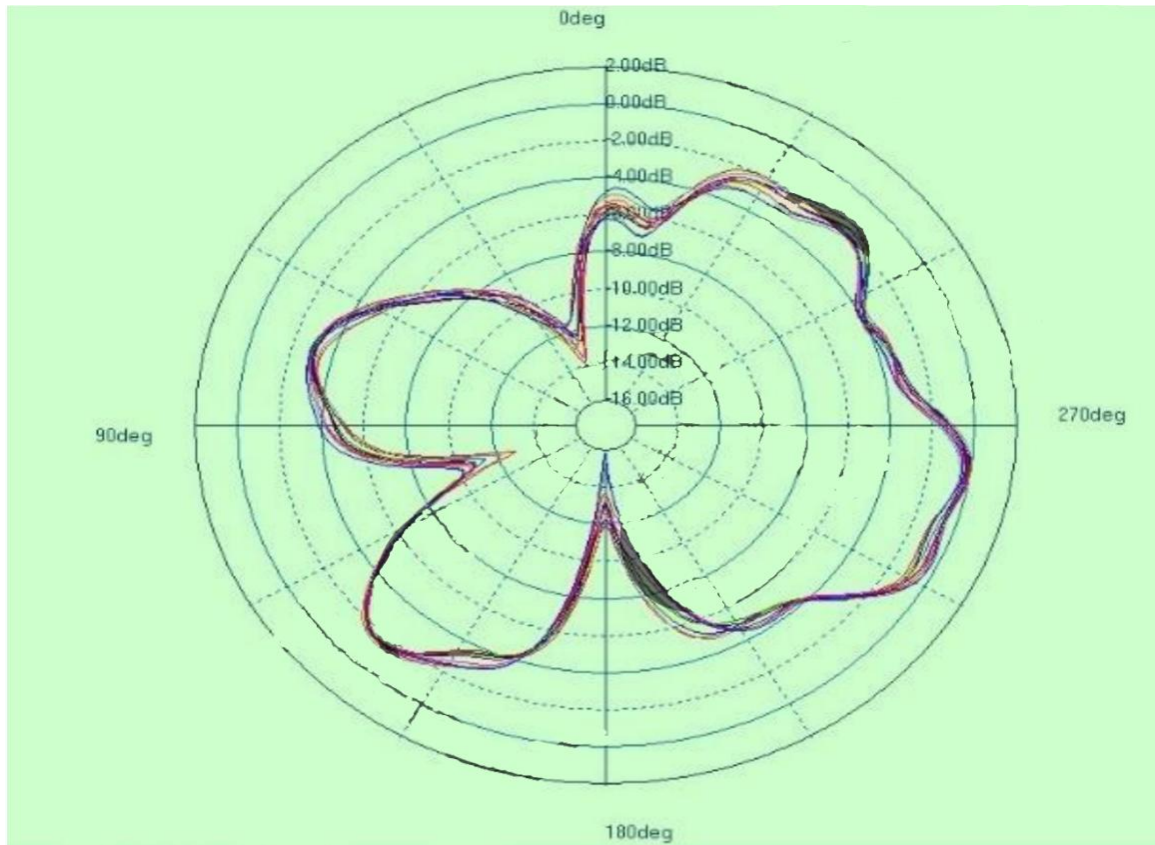

PHI=90

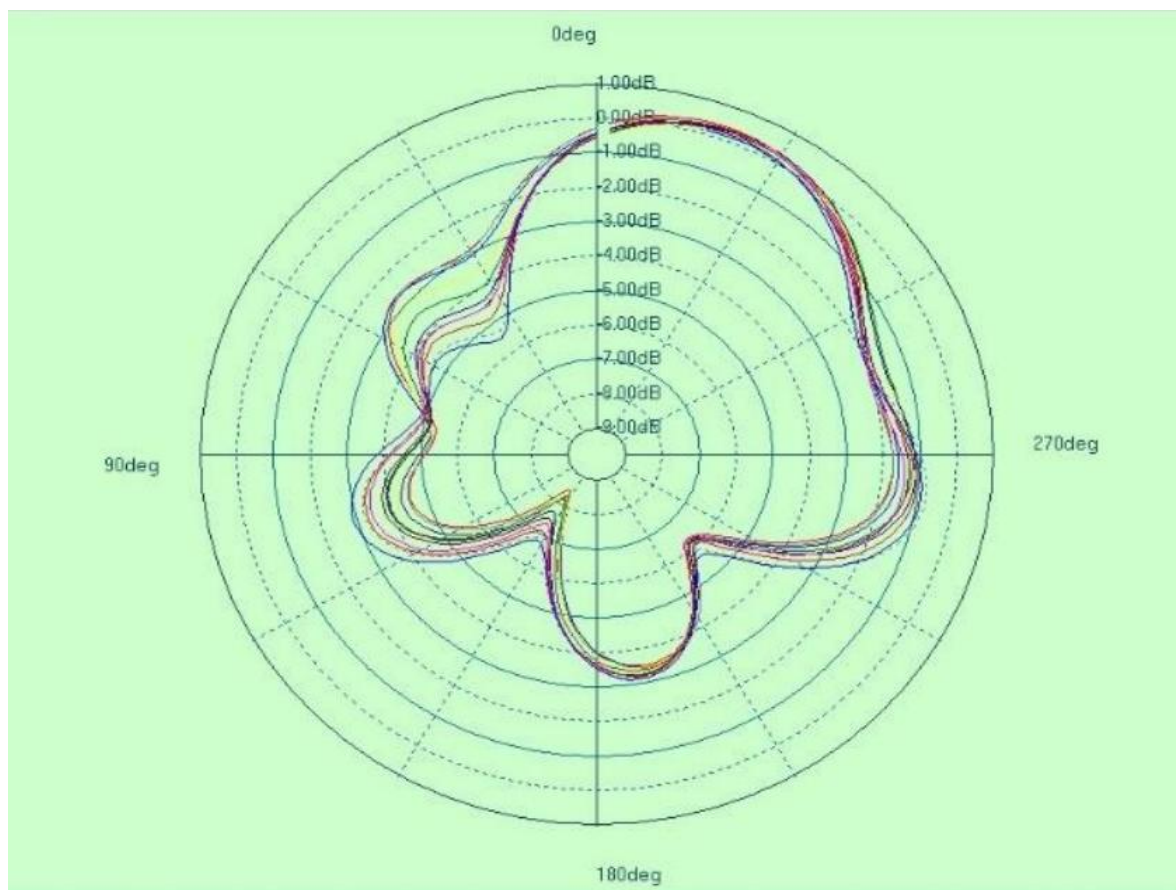


THETA=90


ANNEX B RADIATION PATTERN

B.1 3D Pattern

B1.1 3D Pattern for 2400MHz

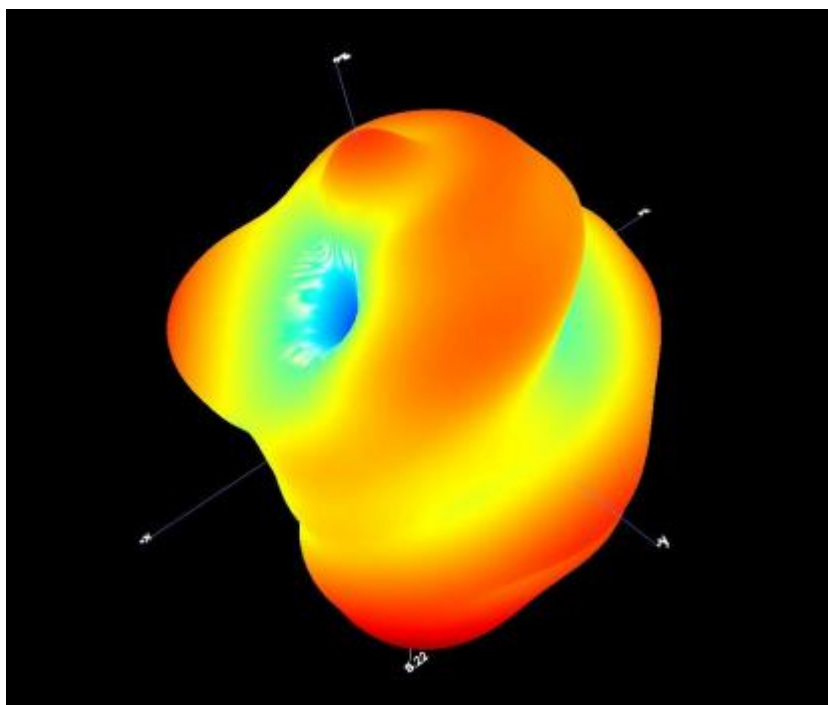

B1.23D Pattern for 2450MHz

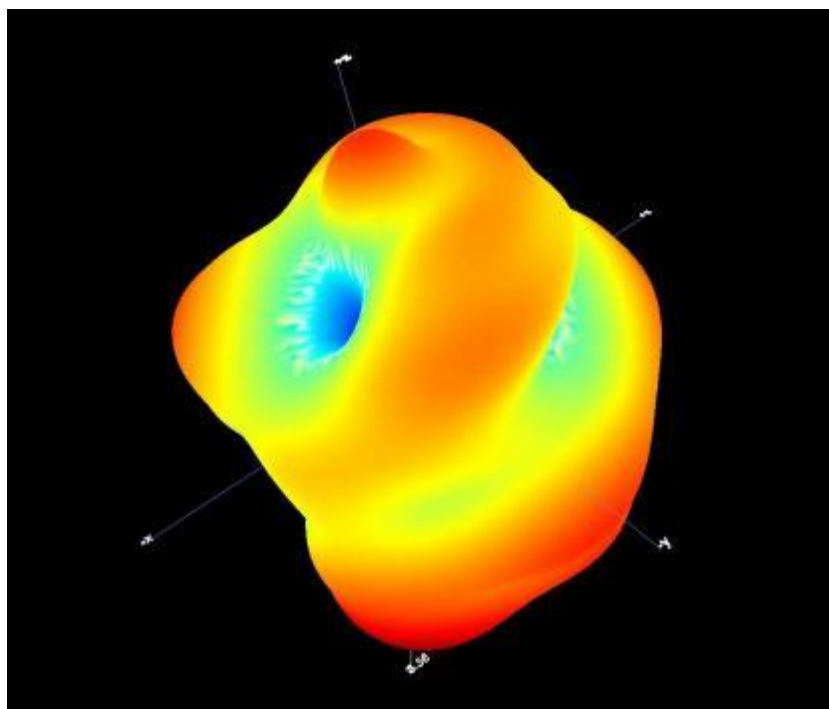

B1.33D Pattern for 2500

