


3. "CHILD LOCK" BUTTON/"SLEEP MODE" BUTTON:

Press this button to turn on & off sleep mode function.

After the Sleep Mode indicator flashes for approximately 5 seconds, the Air Purifier enters into Sleep Mode. In Sleep Mode, all of the unit's lights are turned off, and the Speed is automatically set to LOW (I) speed. Press any button, (EXCEPT the Power button) on the control panel to exit Sleep Mode. If the Power button is pressed while the unit is in Sleep Mode, the machine will be turned off.


Press and hold for 3-5 seconds to turn on & off child lock function.



4. "WIFI" BUTTON/"AUTO MODE" BUTTON:

Press this button to turn on & off auto mode function.

Press and hold for 3-5 seconds to active or reset WIFI connection.



5. "SPEED" BUTTON:

Press the button each time to select L(I), M(II), H(III), Max speed.

PM 2.5 indicator:

Air quality indication LED ring show different color in below logic:


Heavily Polluted	Red	$X \geq 150 \mu\text{g}/\text{m}^3$
Lightly Polluted	Orange	$100 \leq X < 150 \mu\text{g}/\text{m}^3$
Moderate	Yellow	$50 \leq X < 100 \mu\text{g}/\text{m}^3$
Good	Blue	$X < 50 \mu\text{g}/\text{m}^3$

INSTALLING & REMOVING FILTERS

FILTER REPLACE INDICATOR

The RED LED of filter reset being ON continuously indicates that it is time to replace the filter. Follow the instruction below to change filter and reset the program.

*Combination Filter will last approximately 6 months.

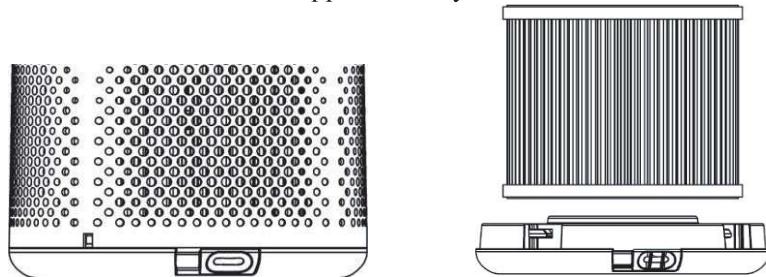

1. Find the lock on the base of the unit.
2. Unlock it by moving it to the left.
3. Lift up the unit.
4. Get the dirty filter out and put a new one into it.
5. Set back the unit and move the lock to the right.
6. Press Power on/off button for 5s to reset the unit.

For more information and “how-to” videos on changing your air filter, please visit www.myblueaura.com.

CLEANING & MAINTAINING

The machine should be cleaned at least once every month by a clean, dry, soft cloth. More frequent cleaning may be required depending on environmental conditions.

NOTE:

Do NOT stick any foreign objects or your fingers into the unit.

Do NOT use gasoline, benzine, thinner, harsh cleaners, etc. on and/or in the unit while cleaning as they will damage the product.

NEVER use alcohol or other solvents.

FILTER CLEANING

FILTER should be cleaned once each month by vacuum cleaner.

Note: Filters should be replaced at least once every 6 months. More frequent cleaning and replacing may be required depending on environmental conditions.

WARRANTY: 1 year from the date of purchase

FOR ANY WARRANTY CLAIMS, PLEASE RETURN YOUR UNIT OR SEND IT WITH FREIGHT PREPAID TO YOUR DEALER, TOGETHER WITH YOUR PROOF OF PURCHASE.

Label for recording the filter replacement date		
ENTER THE INSTALLATION DATE OF THE NEW FILTER		
_____	_____	_____
Day	Month	Year
Place this label inside the unit.		

For questions or to reorder filter, please visit us at:
www.myblueaura.com



Blue Aura Air Purifiers
641 Lexington Avenue, 21st floor
New York NY 10022

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and receiver.
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio/TV technician for help.

FCC Radio Frequency Exposure Statement

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter. End-Users must be provided with transmitter operation conditions for satisfying RF exposure compliance.

IC Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

This device may not cause interference.

This device must accept any interference, including interference that may cause undesired operation of the device.

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter. End-Users must be provided with transmitter operation conditions for satisfying RF exposure compliance.

Cet appareil contient un ou des émetteurs/récepteurs exempts de licence conformes aux RSS exempts de licence d'Innovation, Sciences et Développement économique Canada. Son fonctionnement est soumis aux deux conditions suivantes : Cet appareil ne doit pas provoquer d'interférences. Cet appareil doit accepter toutes les interférences, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil. L'antenne ou les antennes utilisées pour cet émetteur doivent être installées pour fournir une distance de séparation d'au moins 20 cm de toutes les personnes et ne doivent pas être colocalisées ou fonctionner en conjonction avec une autre antenne ou émetteur. Les utilisateurs finaux doivent disposer du fonctionnement de l'émetteur. conditions pour satisfaire la conformité d'exposition RF.

