

U2501&2601 BT ANT SPEC



Type: PCB On Board ANT

Length: 19.60mm

Width: 5.8mm

Technology: FR4&Cover Resistance Welding Oil


Test Company: SHENZHEN FENDA TECHNOLOGY CO.,LTD.


Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,

Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

SWR & Return Loss

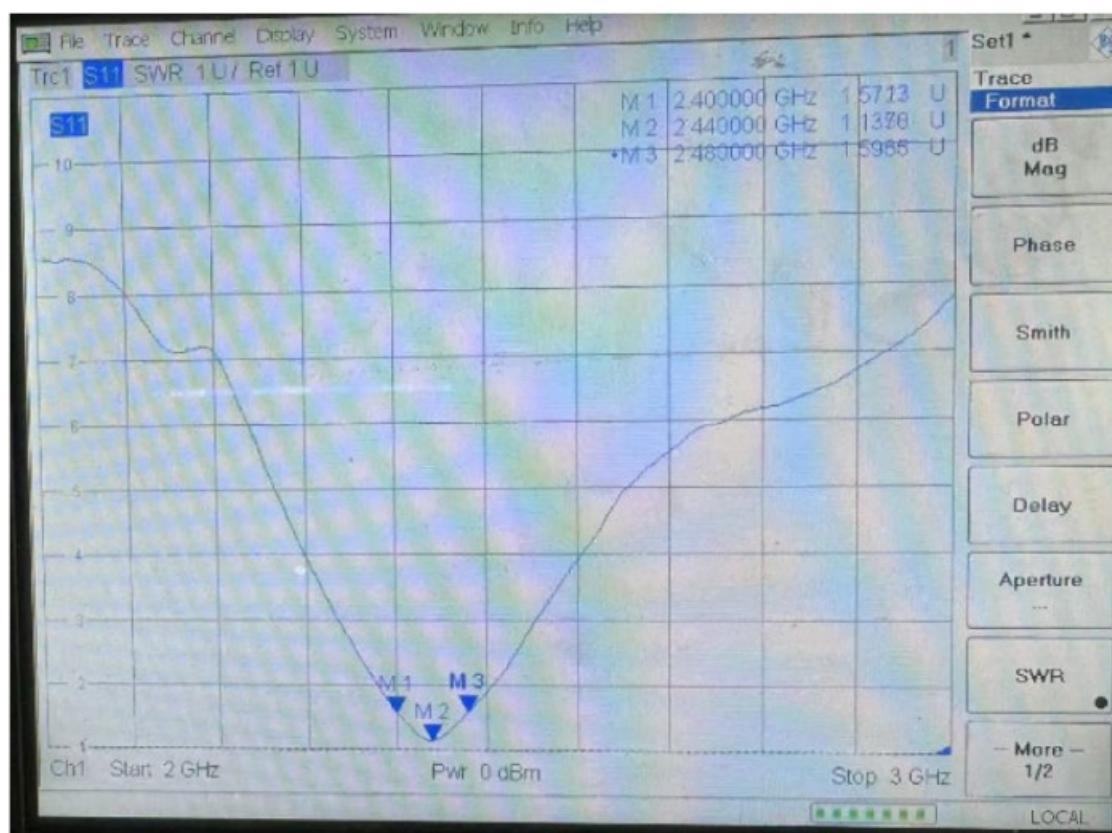

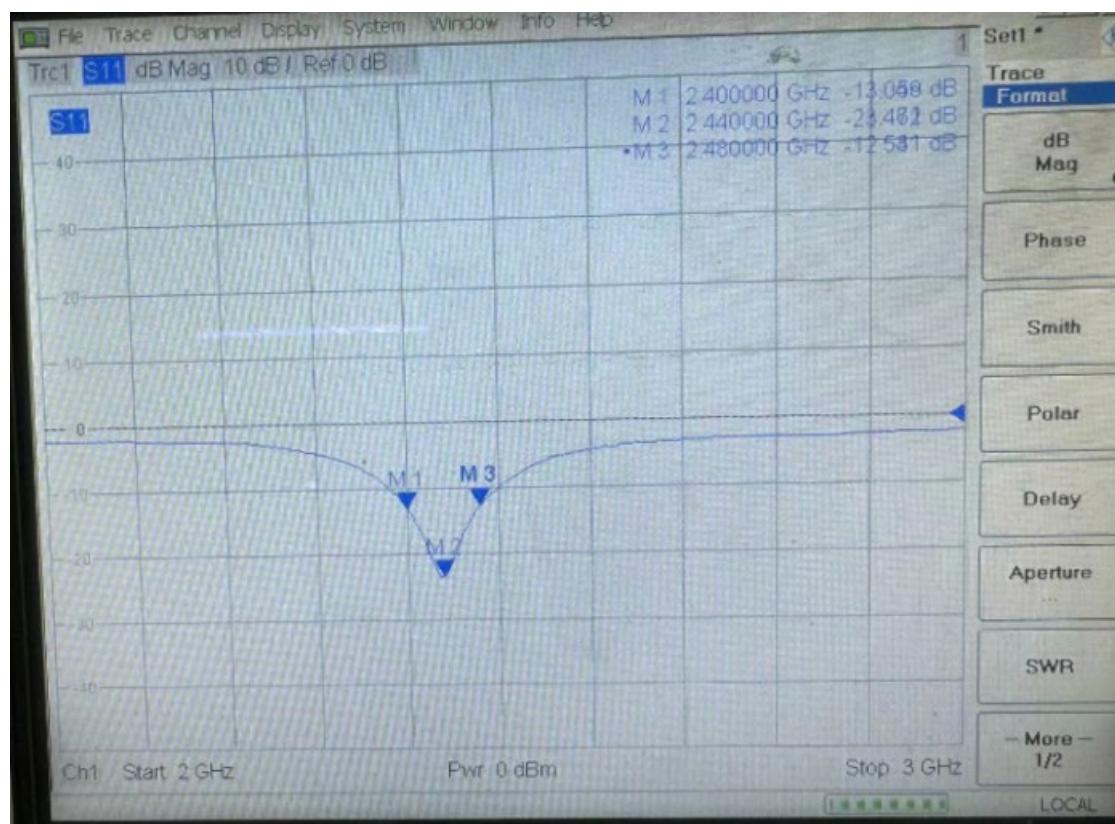

Efficiency & Gain

| 天线 | | |
|-----------|----------------|-----------|
| Freq(MHz) | Efficiency (%) | Gain(dBi) |
| 2400 MHz | 38.71 | 1.68 |
| 2410 MHz | 42.85 | 1.36 |
| 2420 MHz | 43.89 | 1.66 |
| 2430 MHz | 44.29 | 1.95 |
| 2440 MHz | 45.85 | 1.12 |
| 2450 MHz | 47.59 | 1.03 |
| 2460 MHz | 46.05 | 0.89 |
| 2470 MHz | 45.38 | 1.13 |
| 2480 MHz | 43.26 | 1.37 |
| 2490 MHz | 41.95 | 1.86 |
| 2500 MHz | 39.53 | 1.78 |

Antenna Radiation Pattern

天线辐射方向图
Antenna Radiation Pattern

