

ULTIMEA

Apollo S40

User Manual

Twin Subwoofer Powered in One Detachable Design



Model No.: U3300

www.ultimea.com




Content

Accessories list	01
Interface	02
Remote Control	03
Installation Option	04
Wall Mount Installation	06
Connect to devices	07
Power supply	09
Connecting via Bluetooth	10
Specifications	11
Trouble shooting	12
Safety Instructions	13




Accessories list




Soundbar Unit

X1




Power Adaptor

X1




HDMI ARC
Cable

X1




Digital Optical
Cable

X1



2 x Wall
Mounting Sets

X1




Wall Bracket

X1




Remote Control

X1




Stereo RCA to RCA
Audio Cable(100mm)

X1



Stereo RCA to RCA
Audio Cable (2.5m)

X1



Stereo RCA to
3.5mm Audio Cable


X1



Quick Start Guide

Control Panel


- 1 VOL+: Volume Up.
- 2 VOL- : Volume Down.
- 3 SOURCE:
Press to switch channel:
ARC-BT-Optical-AUX-USB.
Press for 3 seconds to
switch to BT mode, and
enter pairing mode.
- 4 Power Button:
Press to power on
Press for 3 seconds to power off.

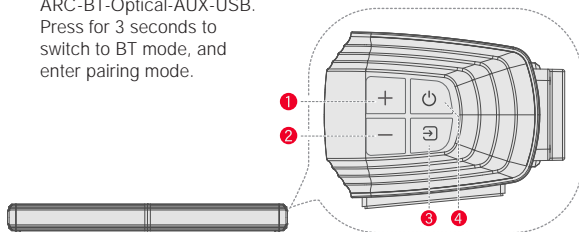












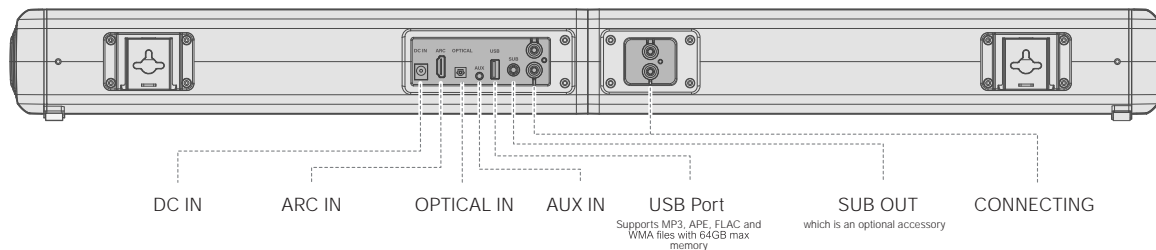


LED Display


----	Power on	ARC	"ARC" channel
-	Standby	bt	"Bluetooth" mode
rst	"RESET" the soundbar	Opt	"Optical" mode
ALL	Play as playlist	AUX	"Auxiliary" input mode
ON	Single cycle	USB	"USB" mode
dyNA	"DYNAMIC" Mode	HIFI	"Hi-Fi" mode
b01 b02	Bass level		










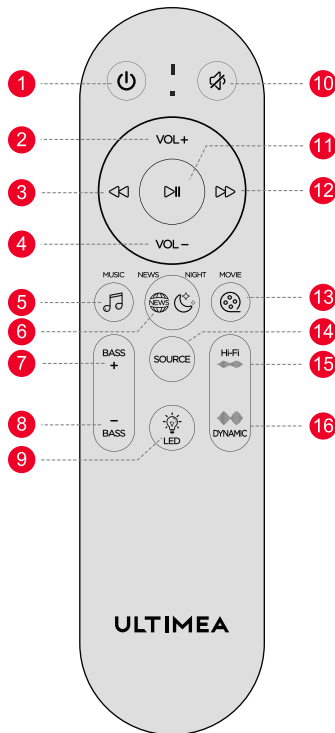




Rear Panel



Remote Control

- 1 “”: Power Button
Press to power on/ Press for 3 seconds to power off
- 2 “VOL+ ”: Volume up
- 3 “”: Previous
BT and USB mode: skip to previous track.
- 4 “VOL- ”: Volume Down
- 5 “”: MUSIC
Press to switch to Music mode, the display will show: “”.
- 6 “”: NEWS/ NIGHT
Press to switch to Night/ News mode, the display will show: “” “”.
- 7 “BASS+ ”:
Increase the Bass level, the display will show: “”, “”, “”...
- 8 “BASS- ”:
Decrease the Bass level, the display will show: “”, “”, “”...
- 9 “”: LED
Press to turn off LED, press again to turn on.





- 10 “”: Mute/ Recover the volume
- 11 “”: Play/ Pause
BT and USB mode: Play/ Pause
USB Mode: Hold for 3 seconds to switch between USB single loop play back and list loop playback.
- 12 “”: Next
BT and USB mode: skip to next track.
- 13 “”: MOVIE
Press to switch to Movie mode, the display will show: “”.
- 14 “SOURCE ”:
Press to switch channel: “”-“”-“”-“”-“”, Hold for 3 seconds to switch to bluetooth pairing mode.
- 15 “”: Hi-Fi
Accrute audio, lower volumes , the display will show “”.
- 16 “”: DYNAMIC
Powerful audio, higher volumes, the display will show : “”.



Installation Option 1 & 2



On table

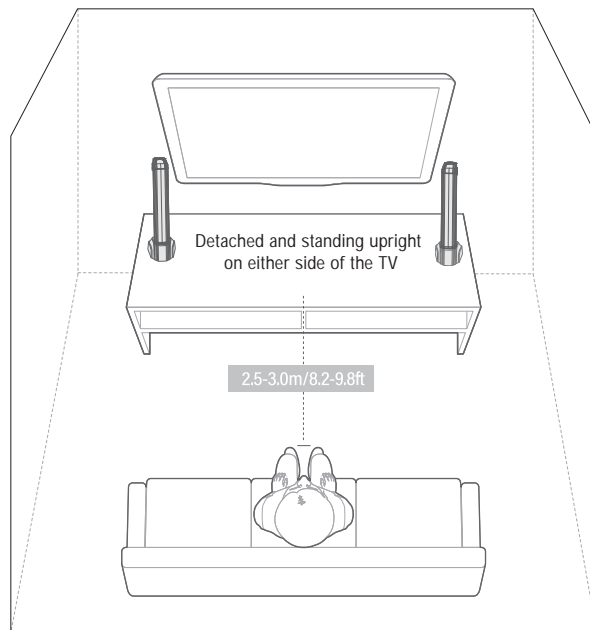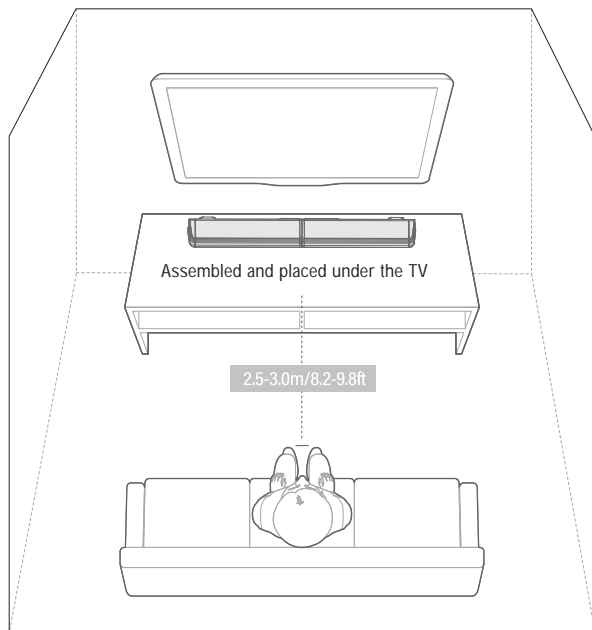



Installation Option 3 & 4

Wall mounted

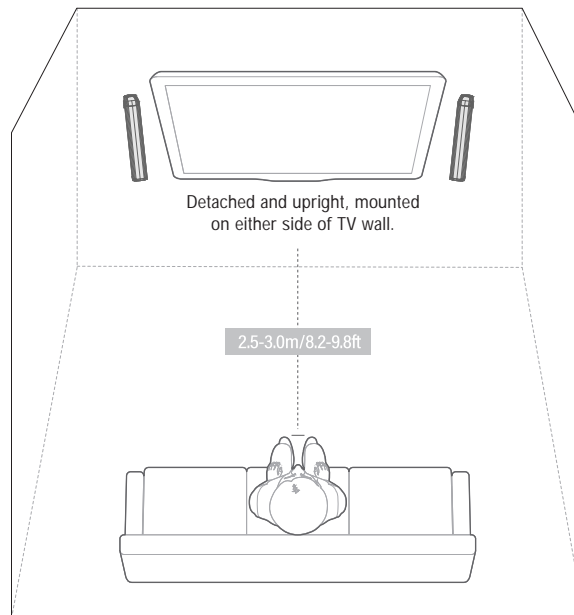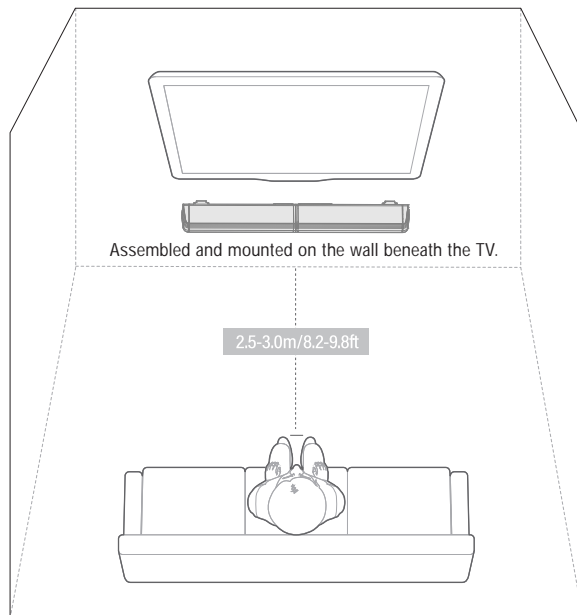





Wall Mount Installation

Assembly steps:

- 1 Align and merge the two parts.




- 2 Twist into place.








- 3 Plug in Stereo RCA to RCA Audio cables.



Detached and stand on base:

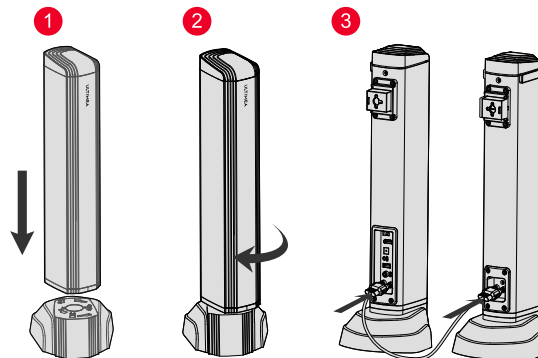


Wall mounting:






Connect to TV

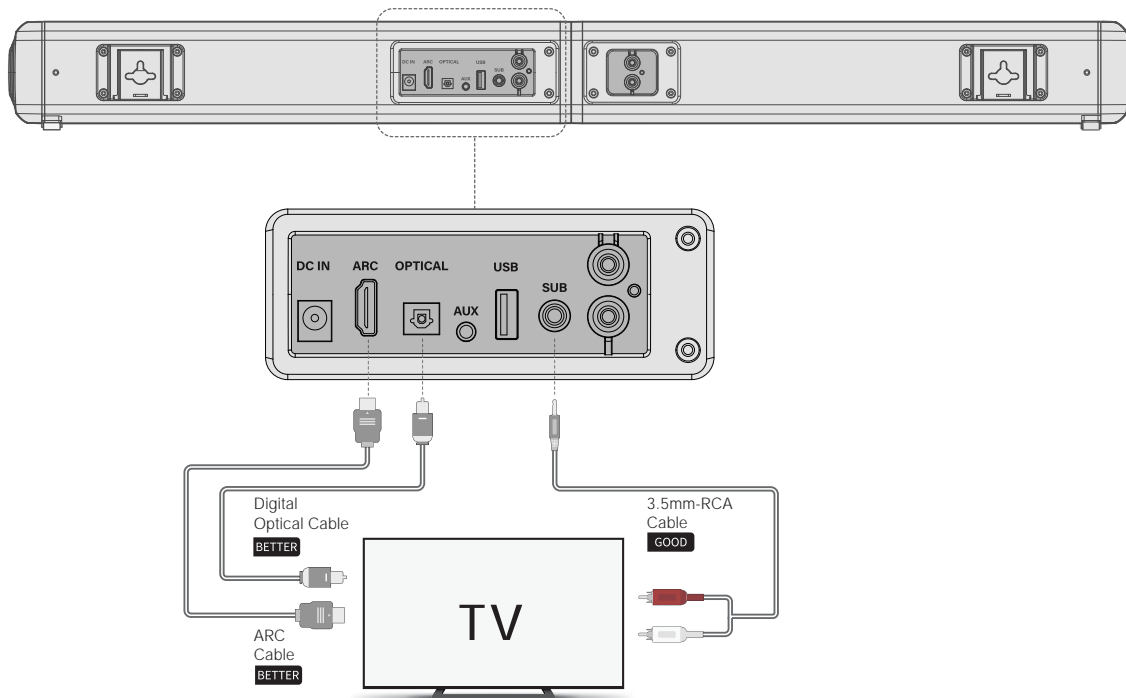



Connect to other devices

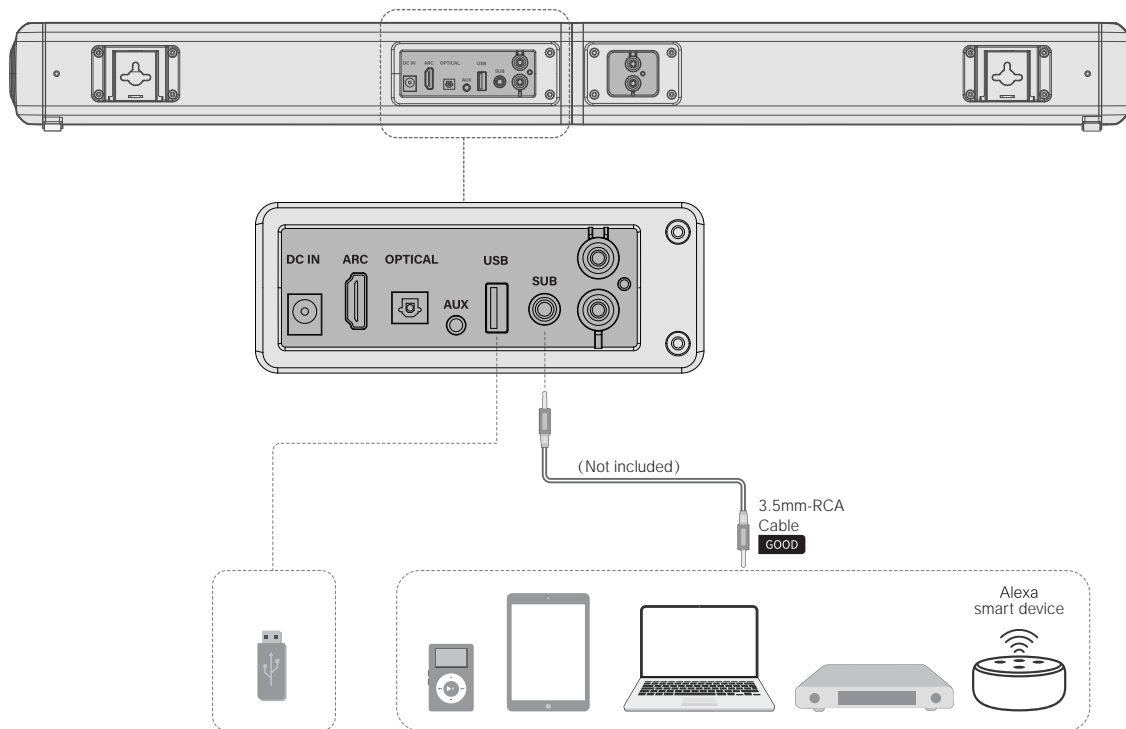





Power supply

Turn On/Off

- 1 The power adapter jack is connected to the soundbar DC in port, and then plugged into the power port.
- 2 Check whether the indicator light (white "—" on the LED display) of the sound bar is on, if not, you need to press the power button on the side.
- 3 The remote can also control the soundbar with the battery installed.

NOTES for TV settings:

Please make sure that the TV audio output format is set to PCM when connecting via HDMI or Optical Mode, in case there is no sound, see operation procedure as below:

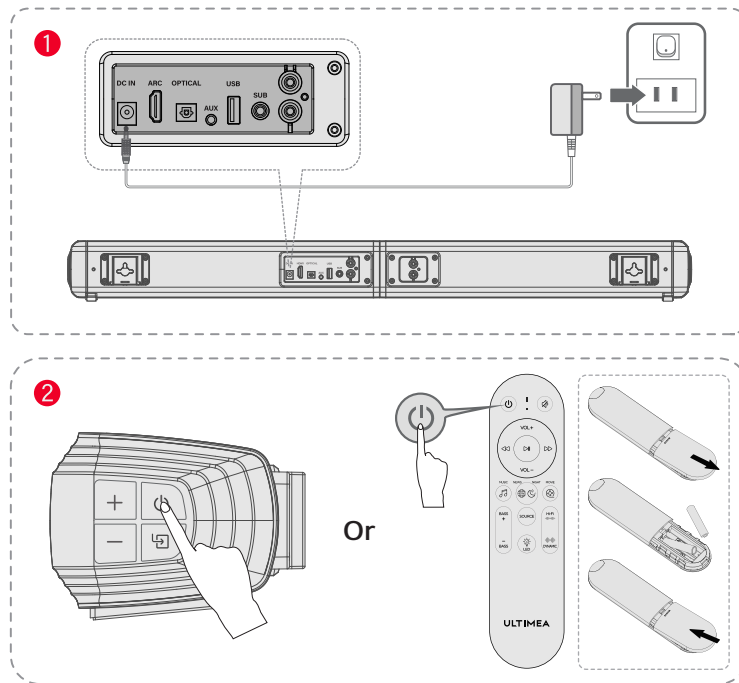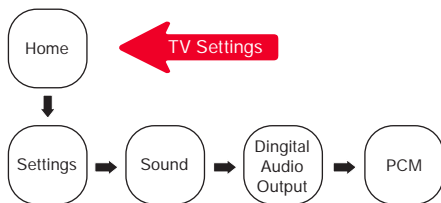




Connecting via Bluetooth

Bluetooth Connection

Press and hold the **"SOURCE"** button for 3s to enter Bluetooth pairing mode.
Find and click the device name **"ULTIMEA Apollo S40"** to connect.

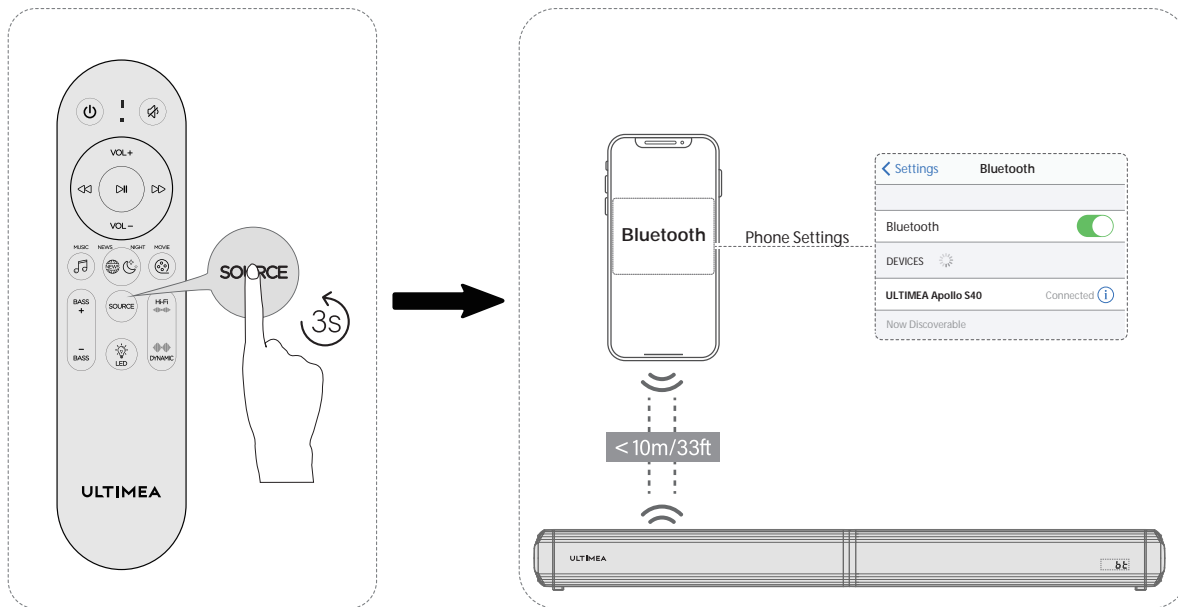



Specifications

General Specifications

- Model No.: U3300
- Power supply: 100-240V AC, ~50/60Hz
- Total Speaker power output: (Max.@THD1%): 40W
- Soundbar Transducer: 2.25"X2(Mid-low range)
+2.25"X2(Mid-high range)
- Frequency Response: 60Hz-18kHz
- Standby power: <0.5W
- Operating performance: 0°C-45°C

Port Specifications

- HDMI ARC: 1.4A
- USB: Type A, Supports MP3, APE, FLAC, WMA, and maximum 64GB memory;
- Rating: 5V,0.5A; Supports file
- Format: MP3.
- Other inputs: optical input X1, AUX inputX1

Bluetooth specifications

- Bluetooth version: 5.0
- Bluetooth profile: A2DP V1.3, AVRCP 1.5
- Bluetooth frequency range: 2402-2480MHz
- Bluetooth transmitter power: <8 dBm (EIRP)

Dimensions

- Dimensions (W x H x D): 803mm x 78mm x 65 mm / 31.6" x 3.1" x 2.6"
- Weight: 2.5 Kg
- Packaging dimensions (W x H x D): 440mm x 156mm x 270mm / 17.3" x 6.1" x 10.6"
- Packaging weight (Gross weight): 3.5 Kg



Trouble shooting

There is no Power

- Press the POWER button on the remote control or on the right of your sound bar.
- Ensure the power cord is securely connected.
- Plug a different device into the electrical outlet to verify that the outlet is working correctly.

There is no sound

- Increase the volume. Press VOLUME UP on the remote control or on the top of your sound bar.
- Press MUTE on the remote to ensure the sound bar is not muted.
- Press INPUT on the remote or on the top of your sound bar to select a different input source.
- When using the Digital Optical input, if there is no audio:
(A) try to set the TV output to PCM or
(B) connect directly to your Blu-ray/other source, some TVs do not pass through digital audio.
- On digital inputs, the LED display will flash "----" rapidly if an unsupported format is present, please set the source to output PCM.



Trouble shooting

There is buzzing or humming noise	<ul style="list-style-type: none">• If using Bluetooth, ensure that the volume on your source device is turned up and that the device is not muted;• Ensure all cables and wires are securely connected;• Connect a different source device (TV, Blu-ray player, etc) to see if the buzzing still exist. If it does not, the problem may be with the original device;• Connect your device to a different input on the sound bar;
The remote doesn't work	<ul style="list-style-type: none">• Replace the remote batteries with new ones.• Point the remote directly at the center of the sound bar when pressing a button.• If the distance between the remote control and the main unit is too far, move it closer to the unit.• If using a Bluetooth connection, some of the buttons on the remote may not be supported by the streaming application.• If the problems still exist, contact customer service to replace it.
Bluetooth Connect Failed	<ul style="list-style-type: none">• The soundbar is already connected with another Bluetooth device, disconnect the previously connected device.• Reboot your Bluetooth device and try to pair again with the soundbar.
The connected Bluetooth device connects and disconnects constantly.	<p>The Bluetooth reception is poor.</p> <ul style="list-style-type: none">• Move your source device closer to the soundbar;• Remove any obstacle between your Bluetooth device and the soundbar.
Can I use bluetooth headphones with sound bar?	<p>No, it's cannot output Bluetooth signal to your headphones.</p>
I connected optical cable to Samsung TV, why do I get only loud static? no TV sound... just static?	<ul style="list-style-type: none">• Please check that all cabling is connected/inserted correctly;• Make sure the audio format setting on your TV is set to PCM and the correct audio input mode has been selected.



Safety Instructions

Please read this user manual carefully and save it for future reference.

Do not make unauthorized alterations to the product, doing so may compromise safety, regulatory compliance, system performance, and may void the warranty.

- Avoid dropping.
- Do not disassemble.
- Do not submerge in water.
- Avoid extreme temperatures.
- Do not use the device outdoors during thunderstorms.
- Use original or certified cables.
- Do not place dangerous items on top of this device (e.g. liquid filled objects, lit candles).

- Clean with a dry, soft lint-free cloth. Do not use any corrosive cleaner or oil.
- To avoid hearing damage, do not listen for extended periods at high volume.
- Do not expose the batteries to extreme heat sources such as direct sunlight or open flames.
- The ideal operating temperature for this product and its accessories is between 41°F / 5°C and 95°F / 35°C.
- The adapter should be installed near the device and should be easily accessible.
- Do not use this product in environments of extreme heat or cold. Never expose this device to strong sunshine or wet environments.

Proper Disposal Instructions



This mark shown on the product or its packaging, indicates that this product should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

FCC Regulatory Compliance

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and.
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in onjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L' appareil ne doit pas produire de brouillage;
- (2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.

This equipment complies with IC exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

Cet équipement est conforme aux limites d'exposition IC définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et la carrosserie.

Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Dyanic (Shenzhen) Technology Limited
(Company name)

20th Floor, Building 4, Tianan Cloud Park, Bantian St.,
Longgang District, Shenzhen, China 518000
(Company address)

declare under our sole responsibility that the product
Trade name: ULTIMEA
Equipment: SOUNBAR
Model No.: U3300

to which this declaration relates is in conformity with the essential requirement set out in the Council Directive on the Approximation of the laws of the Member States relating to RED Directive(2014/53/EU) & RoHS(2011/65/EU) product is responsible to affix CE marking, the following standards were applied:

EN55032:2015
EN61000-3-2:2014
EN61000-3-3:2013
EN55024:2010+A1:2015
Draft EN 301 489-1 V2.2.0
Draft EN 301 489-17 V3.2.0
EN300 328 V2.1.1
EN62479:2010
EN60065:2014+A11:2017
IEC62321-3-1:2013
IEC62321-4:2013
IEC62321-5:2013
IEC62321-6:2015
IEC62321-7-1:2015
IEC62321-7-2:2017
IEC62321-8:2017

Full Name: Yoyo.Yu Position: Approbation Manager

Signature:  Place/Date: Shenzhen,China/Sep.26-2022

ULTIMEA

@Dynanic Inc. All rights reserved, registered in the United States and other countries.

16192 Coastal Hwy Lewes DE 19958, United States

We hope you never have the need, but if you do, our service is friendly and hassle-free as below.

Model Number: U3300

EC	REP	SHUNSHUN GmbH Römeräcker 9 Z2021, 76351 Linkenheim-Hochstetten, Germany
----	-----	--

UK	REP	UK CROSSBORDER LIMITED 7 Bell Yard London WC2A 2JR, UK United Kingdom
----	-----	--

Made in China

Manufacturer: Dynanic (Shenzhen) Technology Limited

Address: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China 518000

FCC ID: 2A900-U3300S

IC: 29805-U3300S

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)
+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

✉ support@ultimea.com

🌐 support.ultimea.com



@ultimea_official



RoHS

**UK
CA**