









User Manual

Apollo S60

EN: User Manual

FR: Manuel de l'Utilisateur

DE: Benutzerhandbuch

IT: Manuale d'uso

JP: ユーザーマニュアル

ES: Manual del usuario

Model No.: U3620

Apollo S60 4.1 Channel Dolby Atmos Detachable Soundbar

Contents

01	User Manual	English
	Connection and Installation	02
07	Benutzerhandbuch	Deutsch
	Anschluss und Installation	08
13	ユーザーマニュアル	日本語
	接続と設置	14
19	Mode d'Emploi	Français
19	Mode d'Emploi Raccordement et installation	
19 25	<u>'</u>	
	Raccordement et installation	Italiano
	Raccordement et installation Manuale d'uso	Italiano

ULTIMEA

Apollo S60

User Manual





support@ultimea.com



Model No.: U3620

Prefer video tutorial?

Setup guidance video, USER MANUAL or Trouble Shooting on ULTIMEA website.




@ultimea_official



support ultimea com

Mon-Fri 9am-5pm (PST) Mon-Fri 9am-5pm (CET)

1 ACCESSORIES LIST

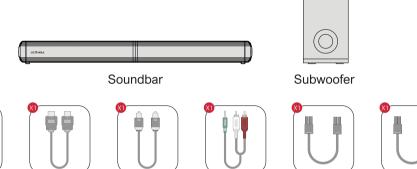

Stereo RCA to 3.5mm

Audio Cable



Power Adaptor

Wall Mounting Kit


HDMI Cable

Wall Bracket



Digital Optical Cable

Remote Control



4-pin Cable for

Soundbar


Base



4-pin Cable for . Soundbar Connection(2.5m)



User Manual



Control Panel

- 1 VOL+: Volume Up.
- VOL-: Volume Down.
- Open Button:

Press to power button to turn on / off

4 INPUT:

Press to switch channels: EARC-HDIN-OPT(OPTICAL)-BT-AUX-USB. Hold for 3 seconds to disconnect the current device and connect to a new device manually on your mobile phone / PC / TV (BT ID: Apollo S60)

Remote Control

- 1 "∪": Power Button
 Press to power button to turn on / off.
- 2 "=":eARC

Press to switch to HDMI eARC channel.

- 3 "==" : HDIN
 - Press to switch to HDMI IN channel.
- 4 "□": OPT

Press to switch to OPTICAL channel.

6 "⊙": AUX

Press to switch to AUX channel.

6 " * ": BT

Press to switch to Bluetooth channel and enter pairing mode. Hold for 3 seconds to disconnect current device and connect to a new device manually on your mobile phone / PC / TV (BT ID: Apollo S60).

🕜 " 💳 ": USB

Press to switch to USB channel.

- 6 "+": Volume Up
- "—": Volume Down
- "<": Previous

For BT and USB mode only: Skip to previous track.

For BT and USB mode only: Skip to next track.

😰 " DII ": Play / Pause

For BT and USB mode only.

USB mode: Hold for 3 seconds to switch between single loop playback and list loop playback.

MOVIE ": MOVIE

Press to switch to MOVIE mode.

M " GAME ": GAME

Press to switch to GAME mode.

15 " MUSIC ": MUSIC

Press to switch to MUSIC mode.

16 "BASSMAX ": BASSMAX

Press to adjust bass level, the display will show: "b5-2", "b5-1", "b5 0", "b5 1", "b5 2".


🕡 "☆": Mute / Recover the volume.

U OPT HD IN 0 * вт USB AUX + ÞΠ > MOVIE GAME MUSIC BASS M ¥ ULTIMEA Apollo S60


3 SOUNDBAR INSTALLATION

Assembly steps:

Align the joints of the two parts.




2 Twist to connect.




3 Plug in the 4-pin Cable for Soundbar Connection.




Detached and stand on base:

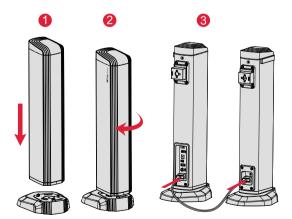


- Set the soundbar on the base and align the joints.
- 2 Twist to connect with the base.
- 3 Plug in the 4-pin Cable for Soundbar Connection.

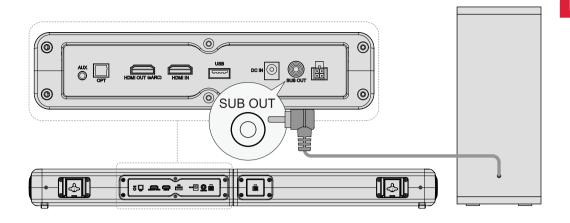

5 CONNECT TO TV VIA HDMI OUT eARC / ARC

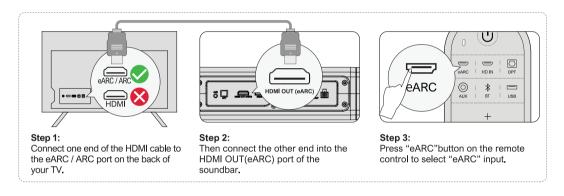

6 CONNECT TO OTHER DEVICE VIA HDMI IN

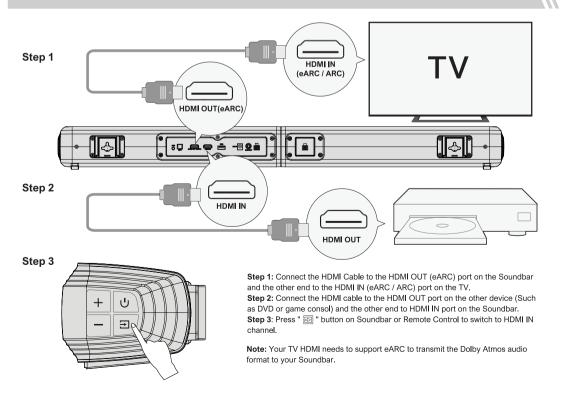

Note:

Make sure your TV HDMI supports eARC, otherwise the Dolby Atmos audio signal cannot be transmitted.

Atmos: If you are watching movie in the Dolby Atmos format, please set the audio output on your TV to Pass Through:

TV Settings > Home > Settings > Sound > Digital Audio Output > Pass Through

DTS: If you are watching a movie in the DTS format, please set the audio output on your TV to PCM:

TV Settings > Home > Settings > Sound > Digital Audio Output > PCM

What's the difference between: HDMI IN, HDMI ARC, HDMI eARC?

HDMI IN is a standard HDMI input that allows you to connect devices to your TV or audio system. It supports audio and video signals, but it does not support audio return channel (ARC) or enhanced audio return channel (eARC) functionality. **HDMI ARC** is a special HDMI port that supports two-way communication between your TV and audio system. This means

that audio can be sent from your TV to your audio system, and audio system can send audio back to your TV.


HDMI eARC (Enhanced Audio Return Channel) is an updated version of HDMI ARC that supports higher quality audio formats such as Dolby Atmos and DTS:X.

Note: Please turn on the "CEC" function on your TV.

When eARC / ARC is connected, your TV remote control can control the soundbar and TV simultaneously:

1 Turn on / off 2 Adjust the volume


7 CONNECT TO TV VIA OPTICAL / AUX



OPTION 1: OPTICAL

- Make sure the TV's port is OPTICAL OUT, connect both sides of the cable to OPTICAL, for both the TV and the soundbar.
- Make sure the optical plug is inserted correctly as it shows in the picture. Do not insert the plug upside down and break the optical.

Note: If audio is coming from the internal TV speakers, mute or minimize the TV volume.



OPTION 2: AUX

- Connect the 3.5mm to RCA audio cable to connect to your TV's RCA AUDIO OUT port.
- 2 Make sure the color of the cables ends matches the color of the TV ports.


Note: Please remember to unplug the AUX cable from TV and Soundbar when you want to switch other mode.

In Optical Mode: If there is no sound, try setting the TV audio output to PCM: TV Settings > Home > Settings > Sound > Digital Audio Output > PCM


8 CONNECT TO BLUETOOTH®


Press the " = " button on the soundbar or press the " * " button on the remote control to enter Bluetooth pairing mode.
Go to the Bluetooth setting on your phone, find and select "Apollo S60" to connect the soundbar.


Note: If it's already in the Bluetooth mode and connected, press and hold " * " button for 3 seconds to disconnect current device and choose to connect to a new device manually on your mobile phone / PC / TV.








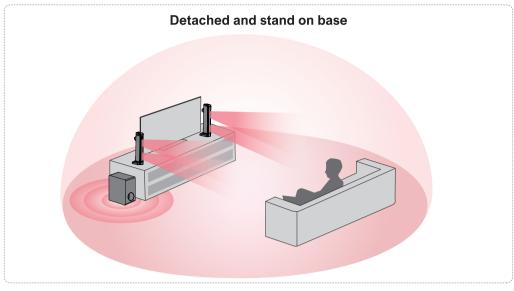

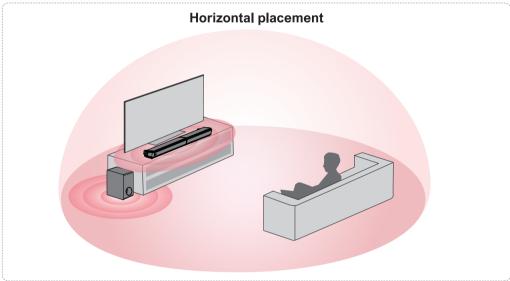

Note: The soundbar should be placed at or near ear level.

10 WALL MOUNT INSTALLATION

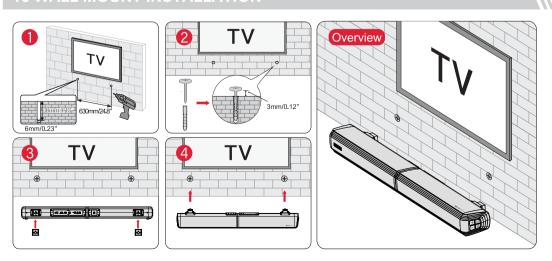

Model Number	U3620
Power Supply	AC 100-240V, ~50/60Hz
Soundbar Drivers	2.25"x 4(Soundbar) + 5.25"(Subwoofer)
Frequency Response	45Hz - 18kHz
Standby Power	<0.5W
Operating Temperature	0°C - 45°C/32°F - 113°F
Bluetooth Vision	5.3

Dimensions and Weight		
Soundbar	811(W) × 98(D) × 70(H) 31.9" x 3.9" x 2.8"	
Subwoofer	270(W) × 115(D) × 270(H) 10.6" × 4.5" x 10.6"	
Packaging	436(W) × 306(D) × 236(H) 17.2" x 12.15" x 9.3"	
Net Weight	4.6kg / 10.14lbs	
Gross Weight	6.7kg / 14.77lbs	

SAFETY INSTRUCTIONS

Please read this user manual carefully and save it for future reference.

Do not make unauthorized alterations to the product, doing so may compromise safety, regulatory compliance, system performance, and may void the warranty.

- Avoid dropping.
- Do not disassemble.
- Do not submerge in water
- Avoid extreme temperatures.
- · Do not use the device outdoors during thunderstorms.
- · Use original or certified cables.
- Do not place dangerous items on top of this device (e.g. liquid filled objects, lit candles).
- Clean with a dry, soft lint-free cloth. Do not use any corrosive cleaner or oil.
- To avoid hearing damage, do not listen for extended periods at high volume.
- Do not expose the batteries to extreme heat sources such as direct sunlight or open flames.
- The ideal operating temperature for this product and its accessories is between 41°F/5°C and 95°F/35°C.
- · The adapter should be installed near the device and should be easily accessible.
- Do not use this product in environments of extreme heat or cold. Never expose this device to strong sunshine or wet environments.

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their suppliers and check the terms and conditions of the purchase contract, This product should not be mixed with other commercial wastes for disposal.

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter (s) / receiver (s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS (s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and ompliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit has être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne quémetteur. Cet équipe-

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Declaration of Conformity

We (Manufacturer is responsible for this declaration) Dynanic (Shenzhen) Technology Limited (Company name)

20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District Shenzhen, China 518000 (Company address)

Declare under our sole responsibility that the product Trade Mark: ULTIMEA

Product Name: Apollo S60 4.1 Channel Dolby Atmos

Detachable Soundbar Model No.: U3620

To which this declaration relates is in conformity with the essential requirement set out in the Council Directive on the Approximation of the laws of the Member States relating to RED Directive (2014/53/EU) & RoHS (2011/65/EU) product is responsible to affix CE marking, the following standards were applied:

EN 55032:2015/A11:2020 EN 55035:2017/A11:2020 ENIEC 61000-3-2:2021 EN 61000-3-3:2013/A1:2021 ETSIEN 301 489-1 V2.2.3(2019-11) ETSIEN 301 489-17 V3.2.4(2020-09) EN 300 328 V2.2.2(2019-07) EN 50663:2017 ENIEC 62368-1:2020+A11:2020 IEC62321-3-1:2013 IEC 62321-4:2013+A1:2017 IEC 62321-5:2013 IEC 62321-6:2015

IEC 62321-8:2017 Full Name: Yoyo.Yu

IEC 62321-7-1:2015

IEC 62321-7-2:2017

Position: Approbation Manager Signature:

Place/Date: Shenzhen, China / Dec. 25-2023

Trade Marks:

Dolby Atmos

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright© 2012-2021 Dolby Laboratories. All rights reserved.

Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Soundlab Technology Co.,Ltd. is under license. Other trademarks and trade names are those of their respective owners.



The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other.

ULTIMEA

Apollo S60 4.1 Channel Dolby Atmos Detachable Soundbar Model No.: U3620



Dynanic GmbH Buchenring 57, 22359 Hamburg, Germany



UK Crossborder limited

7 Bell Yard London WC2A 2JR, UK United Kingdom

Made in China

Manufacturer: Dynanic (Shenzhen) Technology Limited Address: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China 518000



If you need our support, kindly reach out to our service team. We are always glad to help.



















@ultimea_official