


U3721 BT ANT SPEC

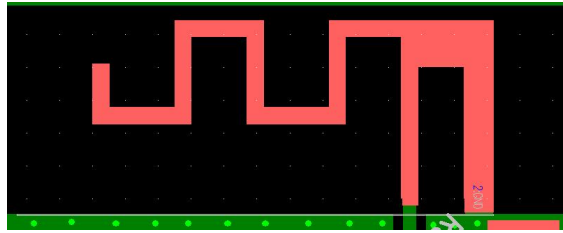

Type: PCB On Board ANT

Length: 12.2mm


Width: 5.9mm

Technology: FR4

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

BT ANT SWR & Return Loss(2.4G)

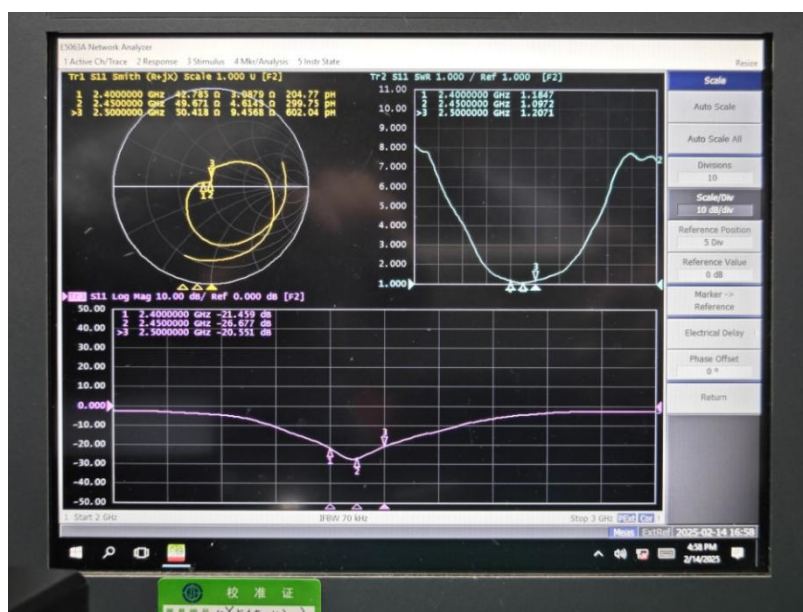

BT Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	49.81	3.48
2410 MHz	48.66	2.96
2420 MHz	49.16	2.83
2430 MHz	51.65	2.90
2440 MHz	51.09	2.40
2450 MHz	48.35	1.98
2460 MHz	50.43	1.87
2470 MHz	49.65	1.74
2480 MHz	47.05	1.68
2490 MHz	45.59	1.58
2500 MHz	47.17	1.80

