


JDY-23 Bluetooth Antenna Specification

JINDOUYUN ELECTRONIC TECHNOLOGY CO.,LTD.


1. Electrical Characteristics

No.	Item	Specifications
1	Working Central Frequency	2450 MHz
2	Band Width	± 75 MHz (2400~2500MHz)
3	Gain	(-5.86)-(-3.68)dBi
4	V.S.W.R (in BW)	≤ 4.3
5	Polarization	Linear
6	Azimuth Beam width	Omni-directional
7	Impedance	50




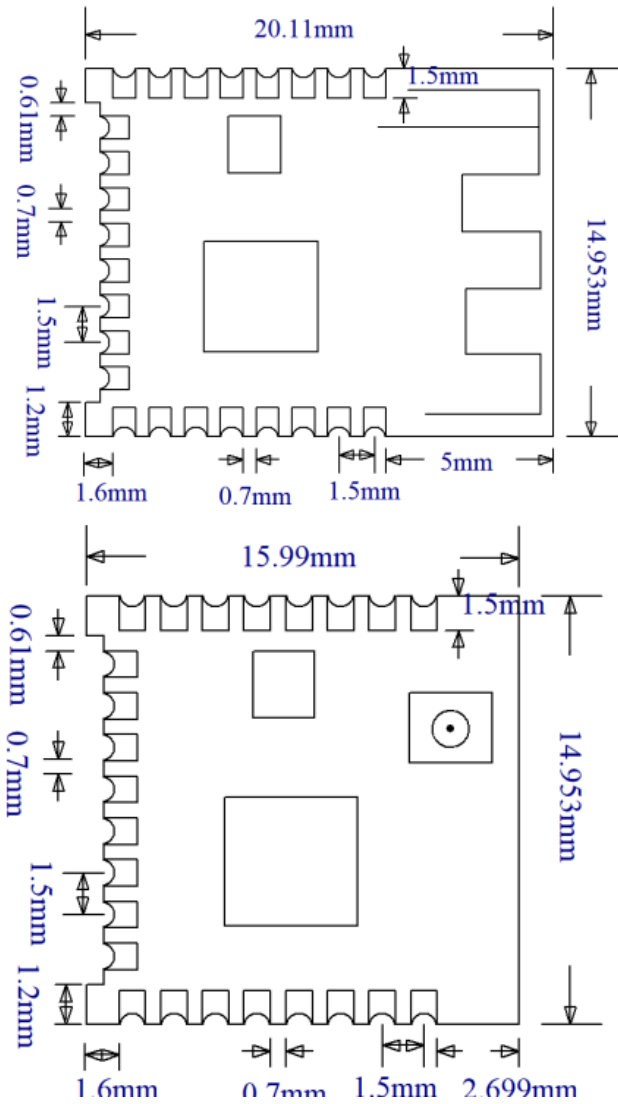


2. Return Loss and Smith Chart Return Loss

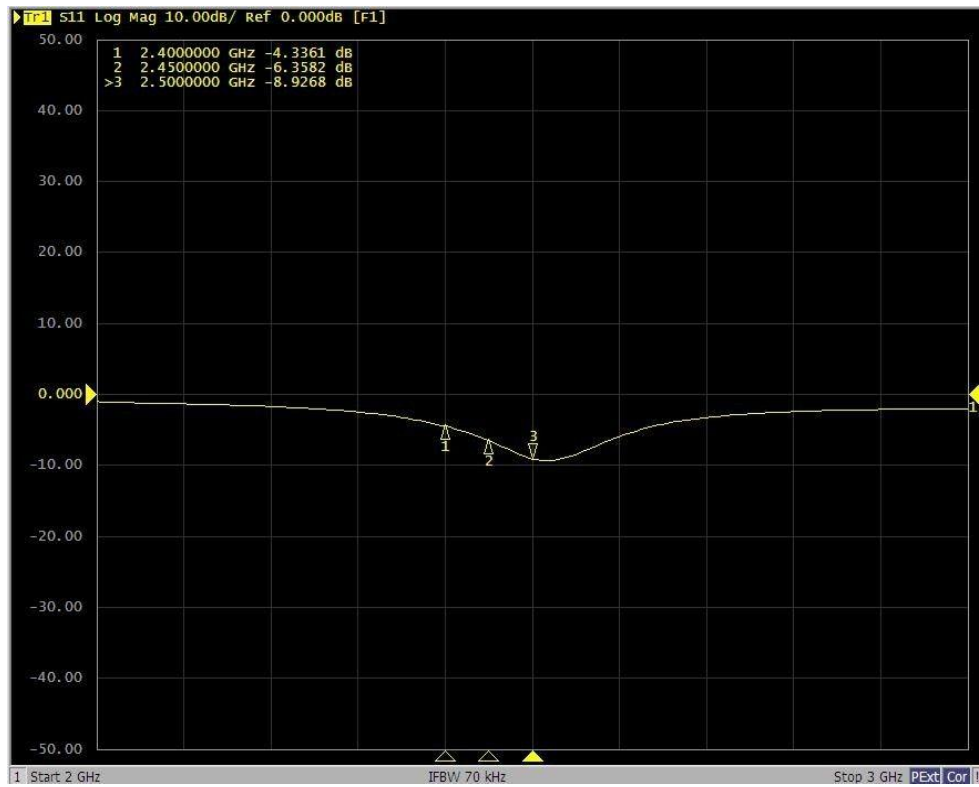

V.S.W.R

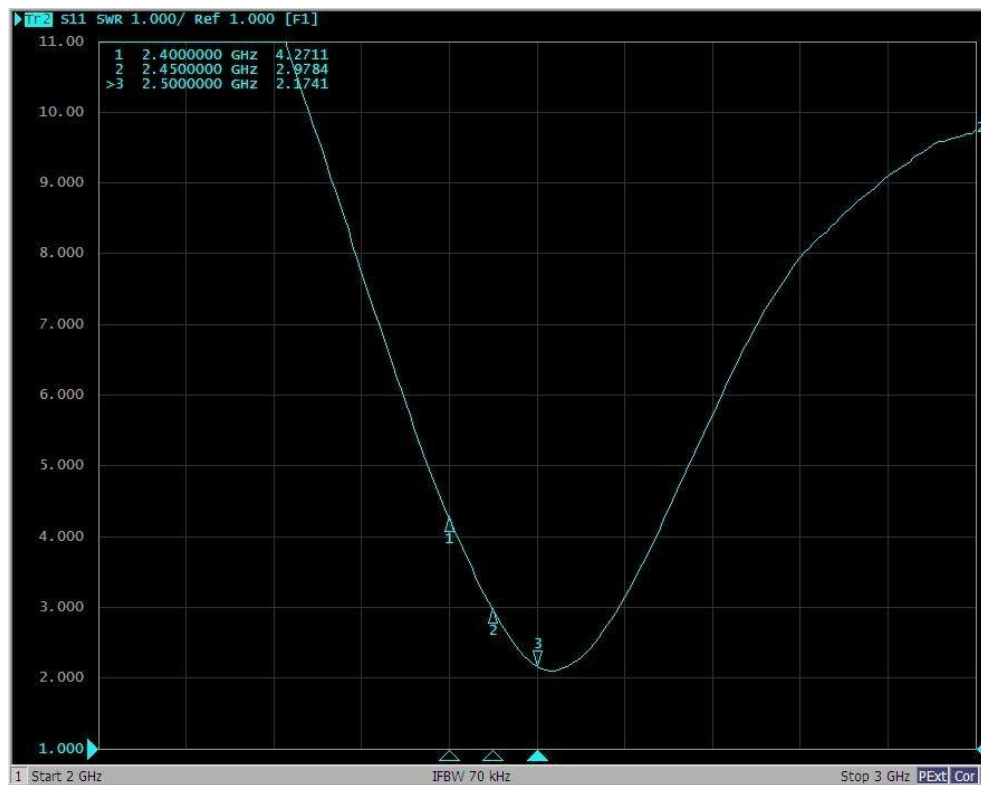


Smith Chat

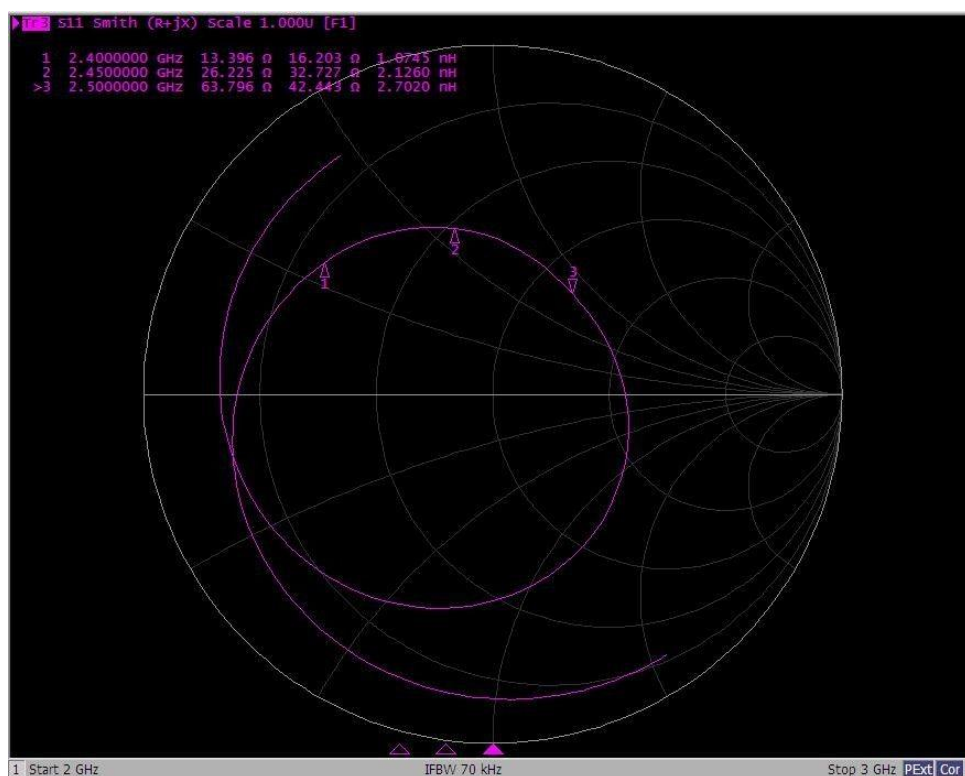


3.Physical Test Environment


E5071C Network Analyzer

4.Shape of the antenna

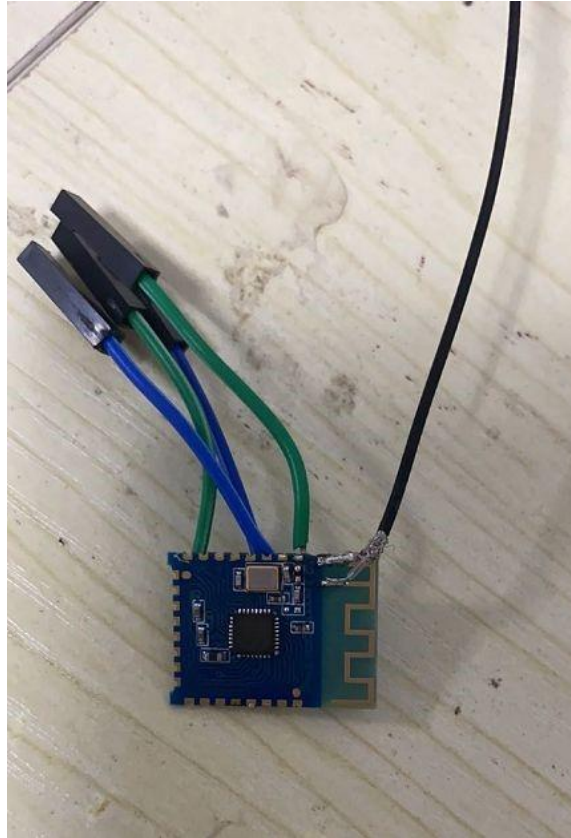


Efficiency:

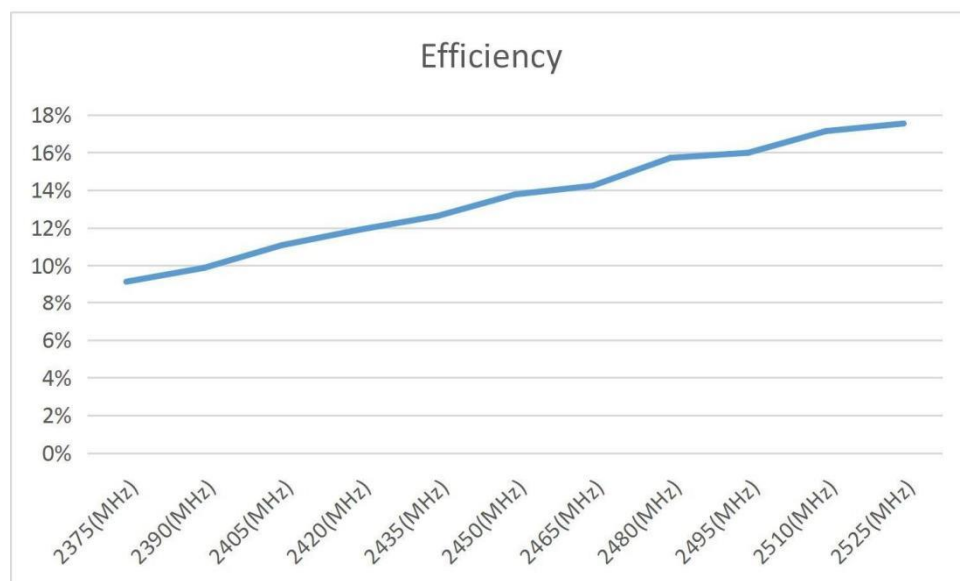


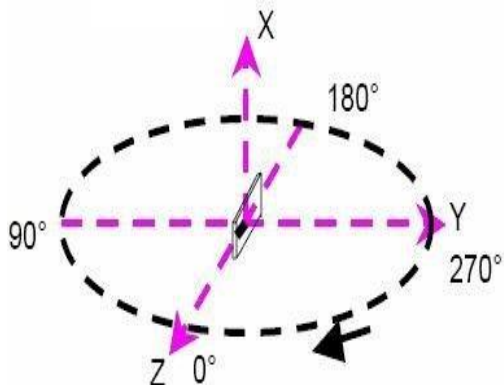


H pattern

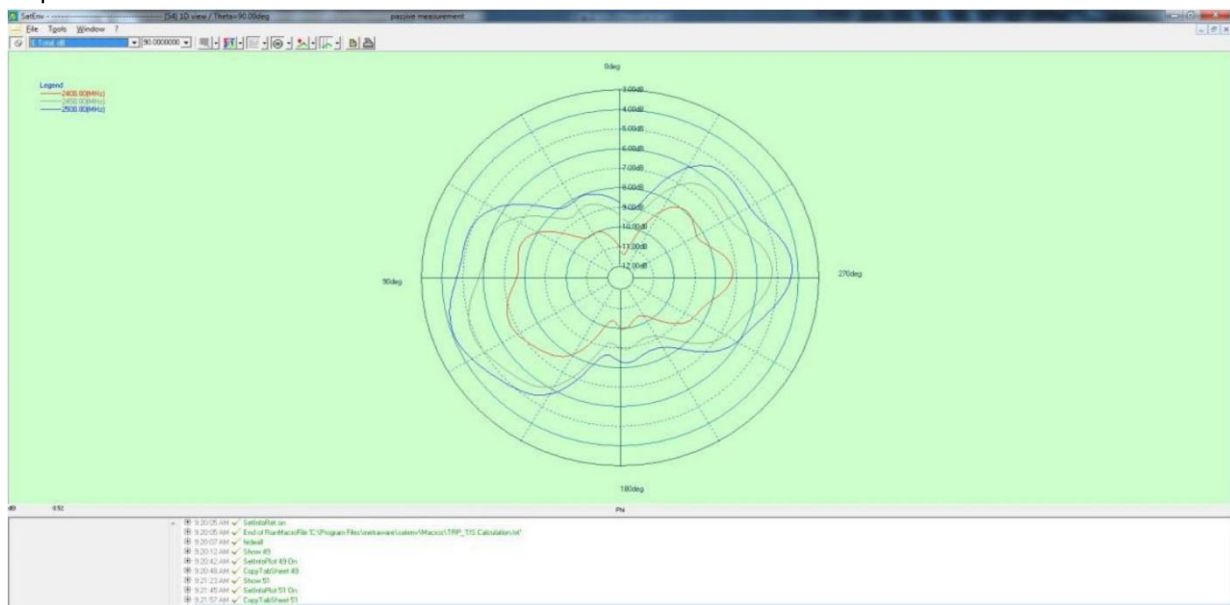


Fre(Mhz)	Max gain(dB)	Degree
2400(MHz)	-6.79 dB	114.00 deg
2450(MHz)	-4.92 dB	112.00 deg
2500(MHz)	-4.07 dB	108.00 deg

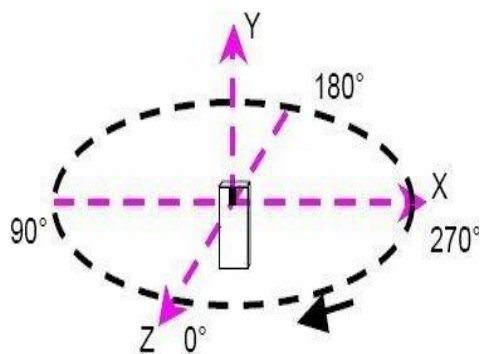


E1 pattern

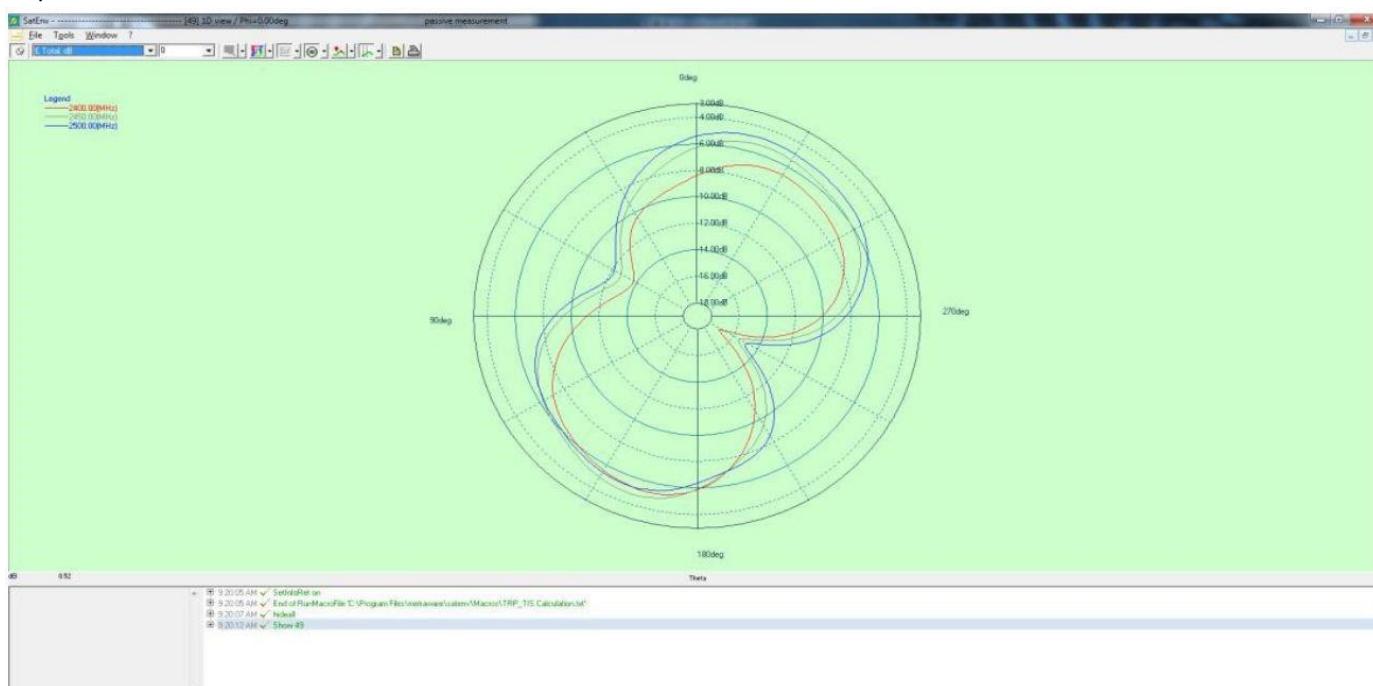

Fre(Mhz)	Max gain(dB)	Degree
2400(MHz)	-5.29 dB	164.00 deg
2450(MHz)	-4.80 dB	160.00 deg
2500(MHz)	-4.87 dB	-20.00 deg

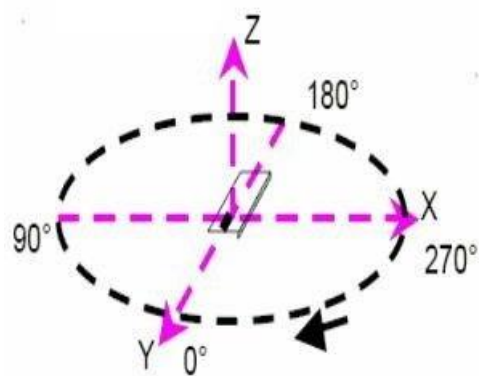

E2 pattern

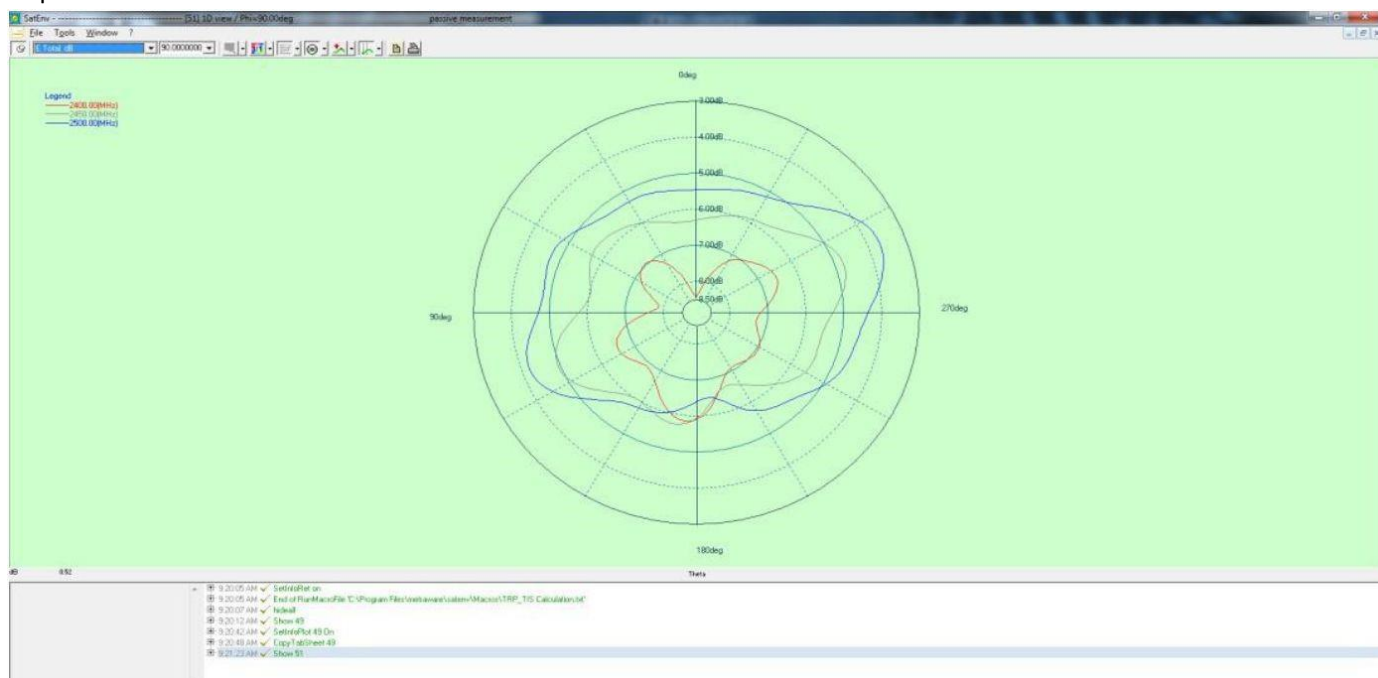

Fre(MHz)	Max gain(dB)	Degree
2400(MHz)	-5.86 dB	174.00 deg
2450(MHz)	-4.78 dB	-70.00 deg
2500(MHz)	-3.68 dB	-68.00 deg