


Hi! Let's get started.

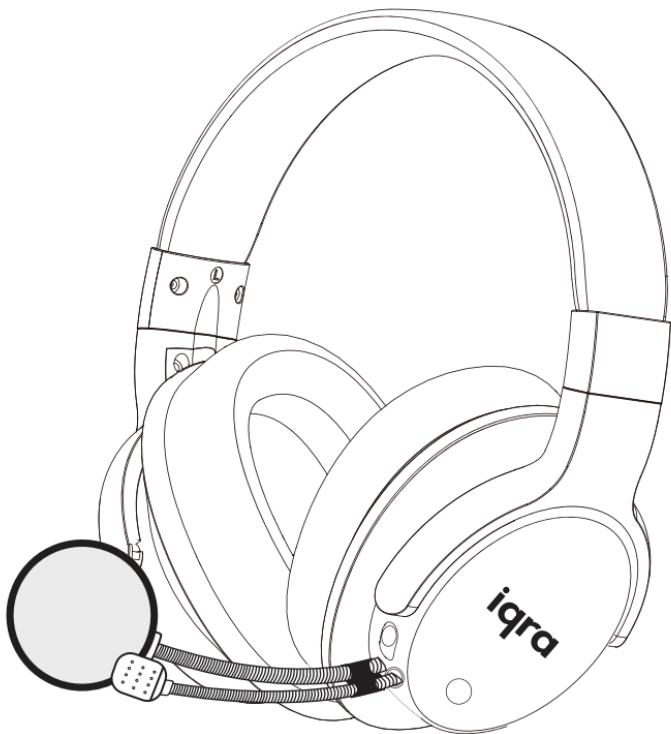

iqlra Studio MIQ1122

User manual

Contents

- 1 Welcome
- 2 Description of the Iqra Studio®
- 3 Important safety instructions
- 4 Technical specification
- 5 What's in the box
- 6 Know your Iqra Studio® headset
- 7 How to use / operate your Iqra Studio® headset
- 8 Connecting to different platforms
- 8a Pair the headset with your smartphone or Bluetooth® devices
- 9 Multiuse
- 10 International Warranty
- 11 Disposal of Product
- 12 Contact & Support

1 Welcome

Congratulations on the purchase of your new Iqra Studio® headset. Iqra Studio® is an amazing product brought to you by Warsan Group UK Ltd. After it is set up and connected, you can enjoy listening, recording and playback of your voice enhanced and beautified with high quality reverb and sound. The Iqra Studio® is designed to enhance your voice and immerse you in the world of your own voice. Iqra Studio® has multiple uses, please see section 8 for more details. You are recommended to read through this user manual which helps you set up, connect and operate the product safely, easily and properly. For more information, visit www.iqrastudio.com

Let's get started.

Overview of your Iqra Studio® headphones



1 Power On or Off button	5 Volume Control
2 Line in port for microphone	6 Reverb type selection/ silent mode
3 LED indicator	7 Reverb level control
4 Type-C port	8 AUX Line in slot to device

2 Description of the product

Iqra Studio® is a headphone and microphone combined with an electronic chip that produces a quality reverb sound. The headset has a comfortable canopy, luxurious ear pads. The function buttons are on the left ear pad. It also has a studio grade microphone and pop filter. The functional buttons consist of the on/off button, volume wheel, and reverb selection button. There are also ports to connect the c cables and aux cables to various devices see section 7 for more details. Your Iqra Studio® also comes with the following additional accessories: a carry pouch, c to c type cable, c to lightening cable, and c to USB cable.

3 Important safety instructions

Hearing Safety



Danger

To avoid hearing damage, limit the time you use headset at high volume and set the volume to a safe level. The louder the volume, the shorter the safe listening time is.

To prevent accidents and damage to ears:

- Listen at reasonable volumes for reasonable periods of time.
- Be careful not to adjust the volume continuously upwards as your hearing adapts.
- Do not turn up the volume so high that you can't hear what's around you.

General safety information

To prevent damage and malfunctions:

- Do not expose headset to excessive heat.
- Do not drop your headset.
- Headphones shall not be exposed to dripping or splashing water.
- Do not allow your headset to be submerged in water.
- Do not use any cleaning agents containing alcohol, ammonia, benzene, or abrasives.

- If cleaning is required, use a soft cloth, if necessary dampened with a minimum amount of water or diluted mild soap, to clean the product.

Battery precautions:

The integrated battery shall not be exposed to excessive heat such as sunshine, fire or the like.

Operating temperature and humidity:

Operate or store in a place where temperature is between 0°C (32°F) to 45°C (113°F) (up to 90% relative humidity).

Battery life may be shorter in high or low temperature conditions.

Liability:

This product is designed for use with mobile devices that support Bluetooth® standard specified by Bluetooth® SIG, Inc. and are compatible to the following Bluetooth® profile:

HSP - Headset profile

HFP - Hands-free profile

A2DP - Advanced audio distribution profile


(Bluetooth® stereo supported)

- It is considered improper use when this product is used for any application not named in this user manual.
- Warsan Group UK Ltd bears no responsibility for accidents or damage caused by improper use of this product.


4 Technical Specification

This product is a wireless stereophonic headphone with a studio microphone, designed to enhance your voice and hear it realtime. It is also used for listening and recording, it has a built-in DSP chip, 3.5mm external microphone, built-in 600mAh max capacity battery, reverb and volume is adjustable. A pop filter, a 3.5mm audio cable, C to C type cable, C to Lightning Cable, C to USB cable and a carry pouch is included.

Charge	DC5V/0.5A
Product size	200*210*88mm
Battery	Chargeable lithium battery
Mic type	3.5mm external microphone
Battery volume	600mAh/902035
Main chip	Dual-core DSP
Charging port	Type-C
Digital balance	EQ adjustment
Bluetooth version	5.0
Bluetooth distance	≥8m
Frequency response	20HZ-20KHZ
Speaker impedance	32ΩHM±15%
Maximum SPL	113dB±2dB
Speaker size	φ40mm
Maximum power	50 mW
Sound channel	stereo



5 What's in the box

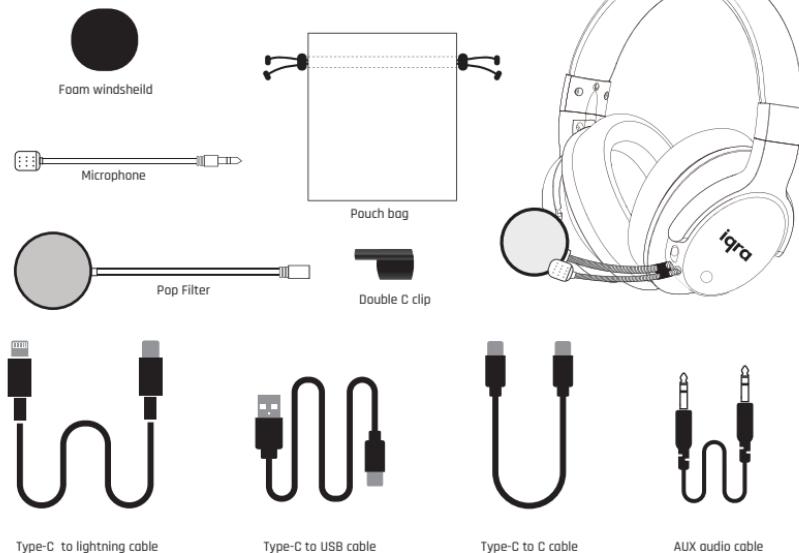

Type-C to lightning cable

Type-C to USB cable

Type-C to C cable

AUX audio cable

6 Know your Iqra Studio®

The Iqra Studio® Headset is designed to enhance and beautify your own voice. You can recite solo or along with your favorite artist with a specially designed reverb technology that makes your sound experience feel like a fully equipped recording studio with all its technical gadgets. You can record your own voice on your mobile phone, notebook, iPad, laptop and desktop. There are buttons and switches that give you enhanced pitch control with reverb types to choose from, multiple reverb setting and volume control. Iqra Studio® is compatible with most devices including: android, iOS and windows and comes with 4 cables.

1. C to C type cable is a data transfer cable for android phones, devices and iOS devices which use a C type port. This is used for recording and sharing your sound bites.
2. C to Lightning data transfer cable, this is for iOS phones and devices that do not have a C port but a lightning port. This is also used for recording and sharing your sound bites.
3. C to USB – this cable is for charging your headset and for connecting to devices with a USB port. It can also be used for recording and sharing on devices with USB ports.
4. Aux or line in cable – this is used for connecting your headset with any device that has an AUX line in port.

Your Iqra Studio® also comes with a studio grade microphone for clear sound, a wind shield protector to filter outdoor sounds, a studio grade pop filter to filter out bursts of air from your mouth into the microphone. It also comes with a soft, luxurious carry pouch to keep your device dust free and safe.

Compatible with:




Warson Group U.K. Ltd does not claim all devices will be compatible with this product.



7 How to use / operate your Iqra Studio®

Before you can start to enjoy using your Iqra studio®, follow the instructions below to set up and connect your Iqra Studio® headset.


On / Off
Power button



⌚ To turn on your Iqra Studio® headset simply push this button down


Volume Control

To turn the volume up or down Scroll up or down using this wheel.



Reverb level Control

There are five levels of reverb settings. To control the desired level of reverb - press once for level one, press again for level two, and press again for level three and so on until you complete five levels. Level one is zero reverb, this level can be used for podcasting and any sound you need which do not require reverb.



Wireless connectivity


- When connecting wirelessly - You are recommended to turn on the smartphone/ Bluetooth® device or activate the Bluetooth feature before turning on the iQra Studio®.
- If the iQra Studio® fail to connect to any Bluetooth device within 5 minutes, the iQra Studio® will switch off automatically to save the battery life. Restart the process.

Charge your headset

To charge your iQra studio® headset: Using the type c to USB cable place the type-c end into the iQra Studio headset and put the USB end into a computer USB slot or power plug USB slot on your device. Please ensure the on/off button is set to off when charging.

LED indicators

- When the red light is solid, and the blue light is flashing - this indicates the device is on and is in Bluetooth searching mode.
- When the red light and blue light are both solid this indicates the headset has connected to a Bluetooth device.
- When the red light is flashing - this indicates the volume is low and the headset needs recharging.
- When the red light is solid - this indicates the headset is charging.
- When the green light is solid - this indicates the volume is at full capacity and battery is charged.




Battery

- For first time use, charge the battery for 5 hours for optimum battery capacity and lifetime.
- After the first time charge, a normal charge takes approximately 2 hours.
- Use only the supplied C to USB charging cable to charge your headset to prevent product damage.


Reverb type / Silence Mode

This button is located on the side of the left ear case, it controls two types of reverb. Press it once to move to type one and press it a second time to move to type two. Press and hold it down for 3 seconds and the microphone will be silenced, press, and hold it for another 3 seconds the microphone will turn back on.

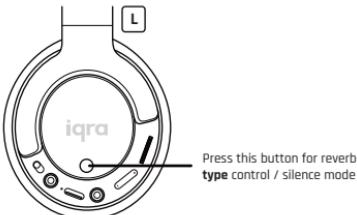


Microphone

Attach the microphone to your headset by lining the two flat ends of the microphone plug with the two flat ends on the microphone input slots and push in.




AUX line in

This is for connecting your headset to other devices that have AUX line in port. Simply place one end of the line in here and the other into your other device.



Pop Filter


The studio grade pop filter can be attached to the microphone and used to filter the bursts of sounds when extra air goes into the microphone when pronouncing letters such as p's and b's. This results in much clearer sound.

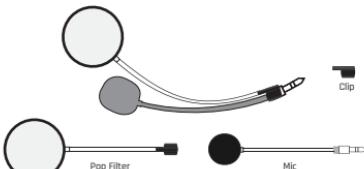


8 Connecting to different platforms

In order to enjoy recording and sharing your voice with reverb, you will need to use the Iqra Studio® with the provided cables in the following manner:

- To connect your Iqra Studio® to an android phone, use the **C-to-C** type cable provided.

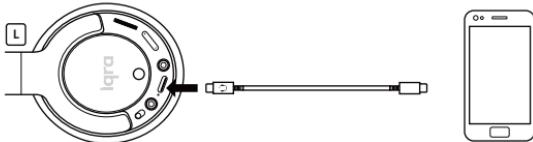


- To connect to a notebook or windows PC use the **C-to USB** cable or the **C-to-C** type depending on the ports available on the device

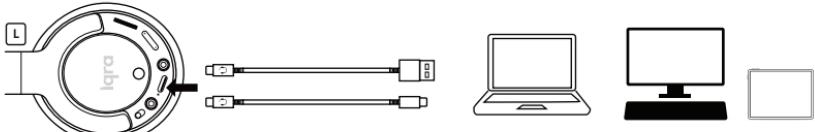


- To connect your Iqra Studio® to iPhone use the **C to lightning cable**

Please note: C to lightning cable is not included in the pack this cable can be purchased from www.iqrastudio.com

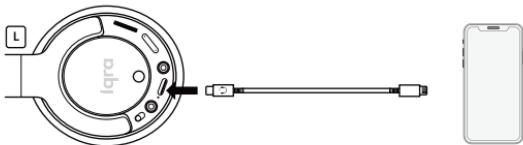

- To connect your Iqra Studio® to iPad/Mac Air/ Mac Pro/ iMac, use the **C-to-C** Type cable or the **C to USB** cable provided depending on the ports available on the devices

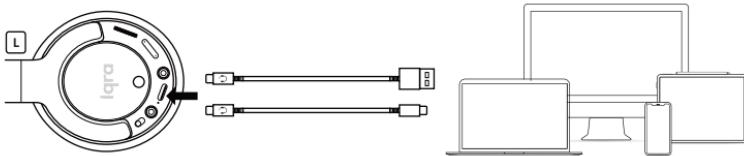

- To connect to other devices or amplifiers use the **AUX line** in audio cable provided in the pack.




Exclusivity

The c to c type, c to lightening and c to USB cables have been designed exclusively to function with Iqra Studio®. Any other universal cable may not work with your Iqra Studio®. If you need to purchase more please visit www.iqrastudio.com accessories page

8a Pair the headset with your smartphone or Bluetooth® devices

- To connect using Bluetooth to an android phone/ notebook or windows pc turn, just turn on the device's Bluetooth and then turn on the Iqra Studio. The headset will automatically find the device and connect. The name of the Bluetooth for the Iqra studio headset is "Iqra Studio®"
- The red light will be solid, and the blue light will be flashing - this indicates the device is on and is in Bluetooth searching mode
- Red light and blue light both solid - this indicates the headset has connected to a Bluetooth device.

Select "Iqra Studio®" from the list of devices displayed on the screen of your Bluetooth device



Troubleshooting

Failure to connect to a Bluetooth-enabled device can be caused by the following:

Other Bluetooth devices are in pairing or sync mode and are interfering with your connection. Please remove other devices from the vicinity or turn them off.

Static or muffled sound can be caused by any of the following:

There are major Bluetooth obstructions between your device and the headset.

You have extended the headphone beyond the recommended distance between devices.

9 Multisue

Vocals/Recitation

With Iqra Studio® you can hear your voice with unimaginable beauty. With five levels of reverb, stereo surround sound, and auto pitch of your voice, you can hear your recitation in your own ears enhanced. You can record it, save it and share it.

Podcasting

Podcasting has over 480 billion listeners, many business and social media users are increasingly using podcasts to increase their sales and reach wider audiences. Let your listener be amazed with the clarity of your speech. Record your podcast with perfection. Its portable, Its personal, its Iqra Studio®

Social Media

Use Iqra Studio® for your social media posts on Facebook, Instagram, Snapchat, and other platforms. Go live or prerecord and amaze your followers with your new precise, beautifully enhanced voice. With different levels of reverb, you can adjust your settings to different sound quality.

Lecture Recording

You can now record your lectures with Iqra Studio® providing precision sound. Record your lecture in the classroom or pre-record them to improve student's experience. Prerecorded lectures are increasingly popular especially post pandemic. Students can learn at their own pace, re visit lectures at any time. Enhance your students learning experience with Iqra Studio®.

Bluetooth 5.0

Connect to any Bluetooth device (without reverb). Listen to your favorite recordings, take calls, make calls, watch movies and much more.

Online Teaching

Online learning has risen to 98% since the pandemic. Teaching live or online is made so much better with Iqra Studio®. You can interact with your students with a clear voice, even if you have a muffled sound, Iqra Studio® will enhance it and make it precise for your learners to hear you with clarity. Adjust your Iqra studio® settings for perfect sound quality.

Voice Training

When you train your voice, you are using your larynx muscles continuously, this helps to tone your throat muscles, which improves your sound. With Iqra Studio®, you don't have to use your throat muscles intensively, your sound will become beautiful and enhanced with just a little effort. Iqra Studio is ideal for those with weaker larynx muscles that want to train their voice.

Gaming

Use your Iqra Studio® for online or offline gaming (without reverb). Enjoy the different levels of noise cancellation, comfort around your ears and clear sound. You can even connect wirelessly using Bluetooth 5.0 or C-Type cable. Make your gaming experience one to remember.

10 International Warranty

Warsan Group UK Ltd has developed this product over years of thought and care. Warsan Group UK Ltd hereby warrants this product for a period of one (1) year from the date of original purchase from Iqra Studio® website or any of its official distributors.

This product is produced without defects in materials and workmanship and the warranty stands provided that the product is only used in accordance with published guidelines on the Iqra Studio® website, including the product's user manuals and technical specifications. The warranty applies only to product(s) you purchased for your own use and not for resale and where you have a purchase receipt as proof of purchase.

Note: All cables provided in the pack as accessories are not covered by the warranty.

Please see the full warranty details here www.iqrastudio.com

11 Disposal of Product

Disposal of Product

If you need to dispose of your product, please recycle it and do not dispose of it as normal waste. Your local council will have information on how to recycle your items.

Disposal of Packaging waste

The plastic covering and cardboard and foam used in the packaging should be also recycled. Please be sure to recycle them and contribute to the well-being of humanity

12 Contact & Support

If you are having difficulty in setting up your Iqra studio® headset, or with any feature of it, please read this manual carefully and if your answers are not contained in this user manual you can refer to the FAQ on our website www.iqrastudio.com Failing that you may contact us on support@iqrastudio.com

Please retain this manual for further use. Please also retain the packaging in case of returns.

Suppliers' details

Warsan Group UK Ltd
71-75, Shelton Street,
Covent Garden, London,
WC2H 9JQ,
England, UK

www.iqrastudio.com
info@iqrastudio.com

Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction