

Axtel

# Wireless Headset


Axtel One BT



AXH-ONEBTD

# Packaging Contents

- Wireless Headset \*1
- User Manual \*1
- Type-C Cable \*1
- Charge Dock \*1
- USB Dongle \*1

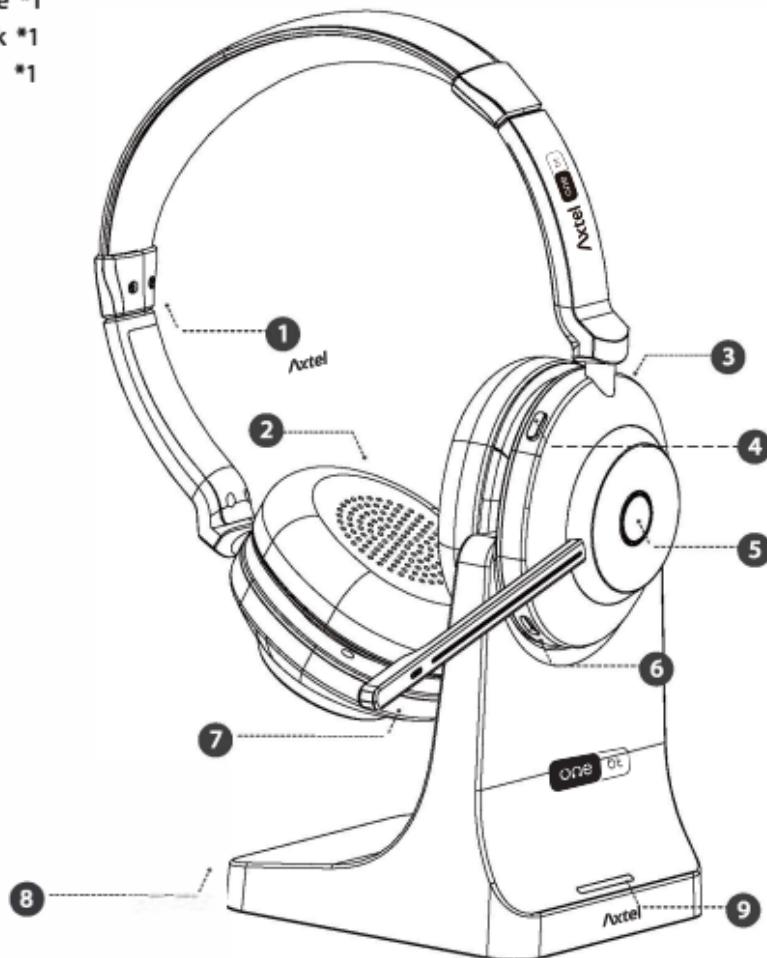

**1** Adjustable headband

**2** Comfortable ear cushions

**3** 180° swivel ear cups

**7** Noise canceling mic

**4** Mic mute button


**5** Answer/Reject button

**6** Type-C charge port

**8** Charge dock

**9** Charge indicator light

# Control & Button

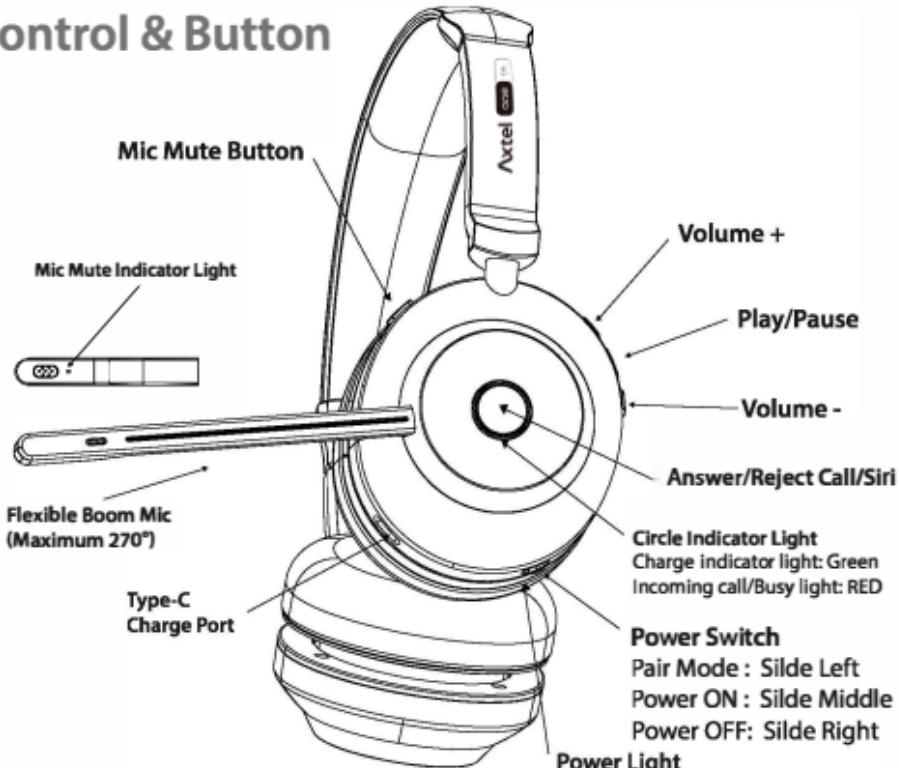

## Operating Instructions

### 2.1 Charging

- ① Plug the USB cable into the headset and the computer, or put the headset into the charging base correctly to start charging.
- ② In the charging status, the charging indicator is Green flashes. After fully charged, the charging indicator light is solid Green.
- ③ When the battery is low, the indicator light will flash red.

### 2.2 Start

- ① In the off status, slide the powerswitch of the headset to the 'middle' gear, and then the headset is power-on. When there is no pairing record, it will automatically enter the pairing mode(Red/Blue flashes) when it is turned on, and enter the re-connection mode(Blue light flashes) when there is a pairing record.

### 2.3 Shutdown

- ① In the power-on status, slide the power switch of the headset to the 'right' gear, and the headset will be power-off.

## 2.4 Pairing

- ① In the power-on status and non-calling status, slide the power switch of the headset to the 'left' gear, and hold it for about 2 seconds until the indicators turn to flash 'Red/Blue' alternately. Then release the switch, now the headset can be found by Bluetooth devices.
- ② Turn on the Bluetooth of the mobile phone/laptop or other Bluetooth devices. When the device finds the headset, select the 'AXT ONE BT' device. When the pairing of the device and the headset is completed, the indicator light will change from an alternately red/blue flash to a slow blue flash.

## 2.5 Answer/reject/hang up calls

- ① First, pair the headset with the Bluetooth device successfully.
- ② When there is an incoming call, click the 'Answer\Reject Call\Siri' button on the headset to answer the current call.
- ③ When there is an incoming call, press and hold the 'Answer\Reject Call\Siri' button of the headset for 1-2 seconds, and the current call will be rejected.
- ④ When the call is over, click the 'Answer\Reject Call\Siri' button on the headset to end the current call.

## 2.6 Volume adjustment

- ① First, pair the headset with the Bluetooth device successfully.
- ② When you need to increase the volume, click the 'Volume +' button on the headset to increase the volume.
- ③ When you need to lower the volume, click the 'Volume -' button on the headset to decrease the volume.

## 2.7 Play/Pause

- ① First, pair the headset with the Bluetooth Device successfully.
- ② When you are playing music, click the 'Play\Pause' button on the headset, and the music being played will be paused.
- ③ When the music is paused, click the 'Play\Pause' button on the headset, and the paused music will be played.

## 2.8 Previous/Next

- ① First, pair the headset with the Bluetooth Device successfully.
- ② When you are playing music, press and hold the 'Volume +' button on the headset until the music is changed, then release the button, and the next music will be played.
- ③ When you are playing music, press and hold the 'Volume -' button on the headset until the music is changed, then release the button, and the previous music will be played.


## 2.9 The voice control function (Siri voice control function of Apple devices)

- ① First, pair the headset with the Bluetooth device successfully.
- ② When the device is not in a call status, quickly double-click the 'Answer\Reject Call\Siri' button of the headset, and the mobile phone will start the voice control function.

## 2.10 Mute the microphone

- ① First, pair the headset with the Bluetooth device successfully.
- ② When the headset is in the status of talking or recording, click the 'Mic Mute' button of the headset, and the microphone will be muted. The microphone mute indicator light is on.
- ③ When the microphone is in the mute status, click the 'Mic Mute' button of the headset, and the microphone will unmute. The microphone mute indicator is off.

# Charge Dock

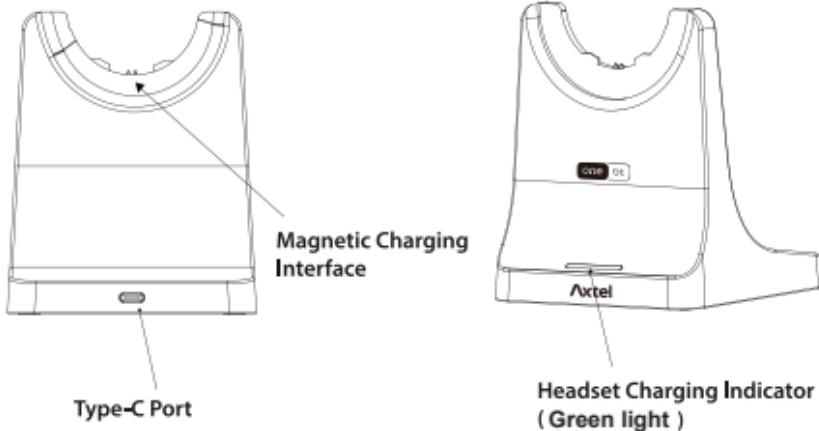

## How to charge with charge dock?

1. Connect the base with TYPE-C charging cable(included).
2. Bottom Power indicator light ON means the base is Powered on.
3. Put the AXT ONE BT headset on the charging base.
4. AXT ONE BT Charge indicator ON, which means headset is charging.


## How to charge with charge cable?

Output: DC 5V



GREEN  
FLASHES

SOLID  
GREEN

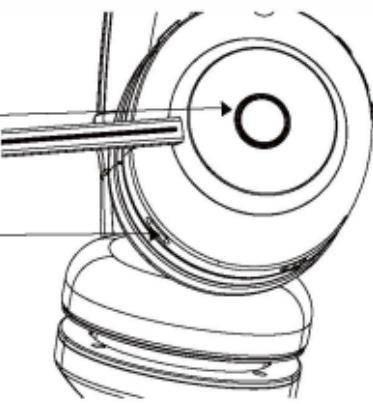


## Connection Guide

### 1. Connection without Dongle

#### PAIRING MODE



- 1.In off status, slide the power switch to the middle, headset turned on.
- 2.Slide and hold power switch to 'PAIR' side, until power indicator flashes Blue & Red, enter pairing mode, you will hear 'Pairing' through the headset. Then release the power switch.



#### Power Switch

Pair Mode : Slide Left

Power ON : Slide Middle

Power OFF: Slide Right

3. Go to the Bluetooth menu on your device. Search and click to connect 'AXT ONE BT' on your Phone/PC/laptop Bluetooth lists, indicator change to Blue flashes once after connected. You can hear 'Connected' through the headset. Now you can play music/make phone calls from device to headphone. (IF ASKED FOR PIN CODE, TYPE 0000)
4. Click PC/MAC sound icon(Bottom right side of Windows/Top right side of MAC) choose 'AXT ONE BT Stereo' when only listen to music. 'AXT ONE BT Hands-free AG Audio' when online meetings or using mic &speakers.
5. You can enter PAIRING MODE at any time needed, just simply slide and hold power switch to 'PAIR' side.
6. Make sure 'AXT ONE BT' is set as playback and recording device in your computer's setting.
7. Make sure 'AXT ONE BT' is set as default audio device for your softphone such as MS Teams.


## RECONNECT MODE

- 1.In off status, slide power switch to the middle, enter reconnect mode with LED Blue flash, the headset will start to search the devices connected before.
- 2.Once the headset connected with the remembered devices, you will hear 'Connected' through the speaker and the LED change to Blue light slow flash.
- 3.Make sure 'AXT ONE BT' is set as playback and recording device in your computer's setting.
- 4.Make sure 'AXT ONE BT' is set as default audio device for your softphone such as MS Teams.



## 2. Connection with Dongle

- 1.In off status, slide power switch to the middle, enter reconnect mode with LED Blue flash, the headset will start to search the devices connected before.
- 2.Plug in the 'AXT ONE BT' Dongle (included in package) into your PC/laptop 's USB-A port.
- 3.The Headset and the Dongle will pair automatically, you can hear 'Connected' through the headset.
- 4.Make sure 'AXT ONE BT' Dongle is set as playback and recording device in your computer's setting.
- 5.Make sure 'AXT ONE BT' Dongle is set as default audio device for your softphone such as MS Teams.

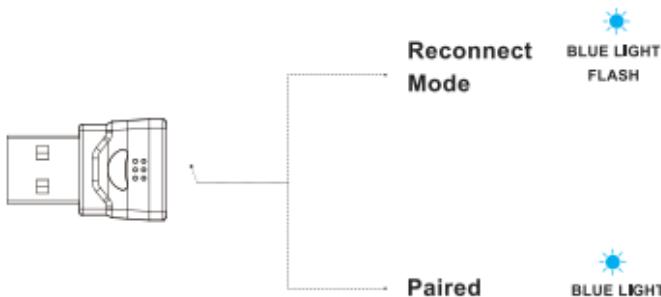

# **Dual Connection**

## **a. Connection with 2 Devices**

### **(Dongle+Bluetooth Device)**

1. Please connect to the Bluetooth device first, then connect to the USB Dongle. First, make sure the USB Dongle is not plug in.
2. In off status, slide the power switch to the middle, headset turned on.
3. Slide and hold power switch to 'PAIR' side, until indicator flashes Blue & Red, enter pairing mode, you will hear 'Pairing' through the headset, then release the power switch.
4. Go to the Bluetooth menu on your Device. Search and click to connect 'AXT ONE BT' on your Phone/PC/laptop Bluetooth lists, indicator change to Blue flashes once after connected. You can hear 'Connected' through the headset. Now you can play music/make phone calls from device to headphone. (IF ASKED FOR PIN CODE, TYPE 0000)
5. Plug in the 'AXT ONE BT' Dongle (included in package) into your PC/laptop's USB-A port.
6. The Dongle will connect to the headset automatically.
7. Now the Dongle and your Bluetooth device are connected to the 'AXT ONE BT' headset.


1 PAIR  ON/OFF



2 PAIR  ON/OFF



3

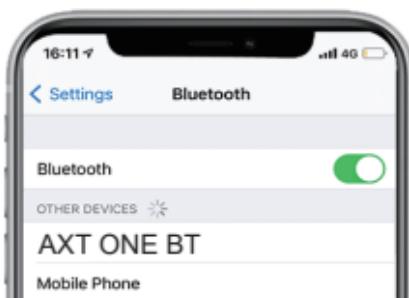

4



5



Plug in the USB Dongle



6

Finished

## **b. Connection with 2 Devices (2 Bluetooth Devices)**

- 1.In off status, slide the power switch to the middle, headset turned on.
- 2.Slide and hold power switch to 'PAIR' side, until indicator flashes Blue & Red, enter pairing mode, you will hear 'Pairing' through the headset. Then release the power switch.
- 3.Go to the Bluetooth menu on your device. Search and click to connect 'AXT ONE BT' on your Phone/PC/laptop Bluetooth lists, indicator change to Blue flashes once after connected. You can hear 'Connected' through the headset. Now you can play music/make phone calls from the first device to headphone. (IF ASKED FOR PIN CODE, TYPE 0000).
- 4.Slide and hold power switch to 'PAIR' side, until indicator flashes Blue & Red, enter pairing mode, you will hear 'Pairing' through the headset.
- 5.Connect to the second device.
- 6.You will hear 'connected', two devices are now connected to the 'AXT ONE BT' headset.

1 PAIR  ON/OFF




2 PAIR  ON/OFF



4 PAIR  ON/OFF



5



Second Bluetooth Device



# Tips when using AXT ONE BT headset

## - Precautions Before Use

- 1.If the Bluetooth headset with microphone is defective or it just doesn't meet your expectation, please let us know(through support email). Our customer service will send you a new one.
- 2.If your device doesn't have Bluetooth function, follow the Connection guide with Dongle above.
- 3.If you have any questions, please feel free to let me know, thank you for your support and trust.

## FREQUENTLY ASKED QUESTIONS

Q: Not ABLE TO USE THE HEADSET ON PC?

A: You can switch different mode of the headset on PC setting of the AUDIO, click the bottom right side speaker icon, you can find 2 choices of the headset normally after connected.

If you can not HEAR others on the online meeting, please choose 'Hands-free AG Audio'.

If you need to only listen to music or videos without using MIC, please choose 'AXT ONE BT' Stereo.

If you connected to the Bluetooth DONGLE, please choose 'AXT ONE BT' Dongle.

Q: HOW TO GET IN PC BLUETOOTH LIST?

A: WINDOWS: When the headset is flashing red & blue light.


GO TO SETTINGS>DEVICES>Add Bluetooth or other Devices>Bluetooth

Q: How to reconnect and operation when failed to reconnect?

A: When 'AXT ONE BT' is connected with your devices successfully once, it will reconnect to the paired devices automatically when power on.

If failed, please connect it manually: Slide the power switch to the middle gear, then click and connect 'AXT ONE BT' on the Bluetooth list on your cell phone.

# Using and Placing

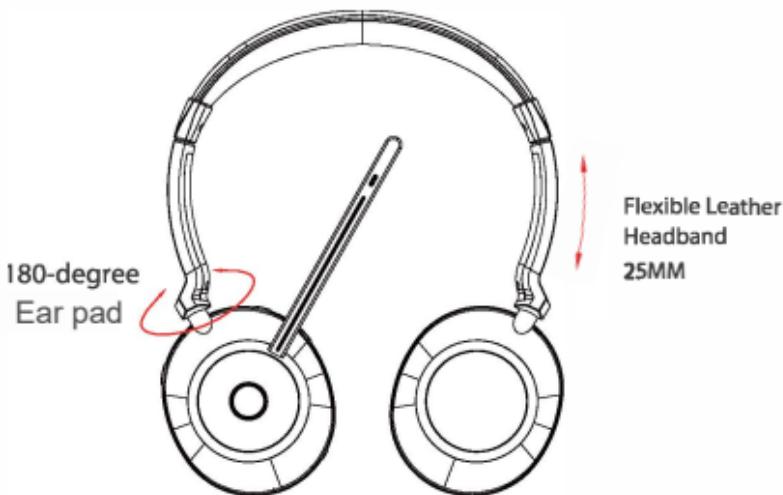

**270°**

**Maximum**

Adjustable  
Boom Microphone



Standby Time  
200H+

Battery Capacity  
500mAh

Talking Time  
40H+

## FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.