


BeatCharge

bluetooth speaker with built in powerbank & hands free microphone

"play your music wirelessly, **charge** your mobile phone and **talk** hands free all with 1 compact fashionable device!"

Instructions

Features/Controls

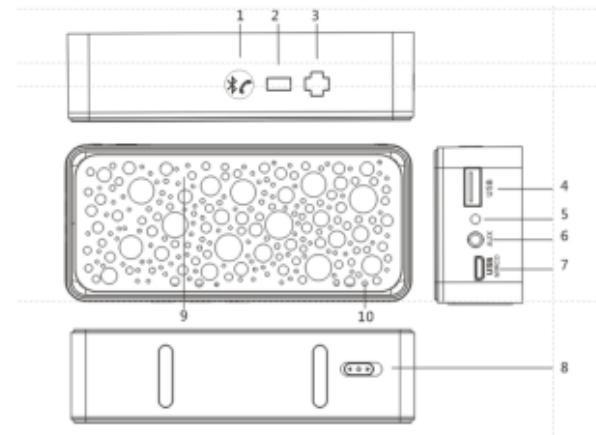

1. Play/Pair/phone button
2. Vol-
3. Vol+
4. USB for charging smartphone
5. Status indicator for charging of BeatCharge
6. AUX IN
7. Micro-USB Charging port
8. Power On/Off
9. Microphone
10. Bluetooth Status indicator

Thank You and Congratulations on your purchase of your BeatCharge!

Now you can Play, Charge and Talk all from one device!

We look forward to you enjoying its great features!

Caution

1. Signal transfer by wireless Bluetooth EDR with v2.1.
For clear sound quality, please do not put your BeatCharge near home appliances like microwave oven, TV and amplifier.
2. The BeatCharge is not waterproof and not fireproof.
Keep it away from water and from high temperatures and fire.
3. When not in use please turn the power of your BeatCharge off.

Connecting to your BeatCharge via Bluetooth

1. Turn on the Bluetooth function of your Bluetooth device/smartphone so that it is searching for new Bluetooth devices.
2. Turn on your Beatcharge, it will beep.
3. Press and hold the  button for approx. 5 seconds to activate Bluetooth pairing. Your BeatCharge will beep, and then the LED indicator (Bluetooth status indicator) will flash blue continuously. If not, please check whether there is any other Bluetooth device connected with your BeatCharge and turn off such other Bluetooth device.
4. Search for your BeatCharge with your Bluetooth device/smartphone and you should see "BeatCharge". Select it and pairing will commence. Enter password "0000" if requested. When paired, your BeatCharge will beep and the LED indicator will regularly flash blue at 5-second intervals(approx.).

Charging your BeatCharge

About once a month, fully charge your BeatCharge (about 4 hours) or charge it to full charge when it has run out of power.

1. Plug the charging cable supplied with your BeatCharge into your BeatCharge's Micro USB charging port and then into the USB socket of your PC/MAC or wall socket power adapter.
2. If you will use your PC/MAC for charging your BeatCharge make sure that your PC/MAC is powered ON.

Charging your Smartphone with your BeatCharge

1. Make sure that your BeatCharge is turned on and that your BeatCharge is fully/well charged.
2. Connect the charging cable of your Smartphone to the USB port of your BeatCharge and then connect to your Smartphone. Your Smartphone will start charging.
3. You can charge your Smartphone and play music with your BeatCharge simultaneously.

Status indicator for charging your BeatCharge

Red light = Charging

Blue light = Fully charged

Connecting to your BeatCharge via 3.5mm audio cable (AUX IN)

1. Connect a 3.5mm audio cable to your Smartphone and then to the AUX IN input of your BeatCharge. The Bluetooth status indicator will turn red and your BeatCharge will turn off the Bluetooth connection.
2. Note that in AUX IN connection mode the Play and Volume controls of your BeatCharge are not operative.

Troubleshooting

My BeatCharge doesn't work or it won't pair

- Try moving your Smartphone closer.
- Please check whether there is any other Bluetooth device connected with your BeatCharge and turn off such other Bluetooth device.
- Is your BeatCharge turned on and charged?
- Turn your Beatcharge off and then on to reset it.
- Is Bluetooth enabled on your device or computer?
- Try repeating the setup procedure in this guide or pair with a different Bluetooth device.
- Your BeatCharge plays music from one device at a time. Unpair the device not being used and pair a new device using the setup procedure to play music from the new device.

Battery Safety Warnings

1. If this BeatCharge is intended by the Purchaser to be used by a minor, purchasing adult agrees to provide detailed instructions and warnings to any minor prior to use. Failure to do so is the sole responsibility of the purchaser, who agrees to indemnify the Manufacturer for any unintended use or misuse by a minor.
2. Never dispose of the BeatCharge in the garbage. This is unlawful under state and federal environmental laws and regulations. Always take used batteries to your local battery - recycling center.
3. Do not dispose of your BeatCharge in fire.
4. The BeatCharge should be recycled or disposed of as per state and local guidelines.
5. Do not charge defective batteries with your BeatCharge. Charge mobile phones which meet all electrical safety requirements.

Limited Warranty

Dear Customer,

This product has been designed and manufactured to the highest quality standards, however should you encounter any problems with this product please contact your local dealer or your country distributor. This limited warranty is valid for the original owner for a period of 12 months from the date of purchase, it is not transferable.

What is covered by the limited warranty:

The limited warranty covers all production and material defects of the product, except for the damages stated below.

What is not covered by the limited warranty:

Damages caused by packing and transport.

Defects caused by accidents, misuse, normal wear and tear, wrong maintenance, voltage variation and overloading.

Damages caused by incorrect installation or operation

Damages caused by modification or repair by a non-authorized service centre and use of non-original spare parts.

Other damages due to conditions beyond the supplier's control such as fire, rain, stroke of lightning, war and other force majeure events.

How to claim parts or repair under warranty:

To have your product serviced under warranty, you must contact the dealer from where you bought the product or please visit www.ampsandwatts.com and send an email for warranty support.

You will need to produce this warranty booklet completed and stamped by your dealer on the date of purchase.

Alternatively, you will need the original sales invoice or other proof of ownership and date of purchase.

The supplier is liable only to repair or replace defective parts of products and the supplier is not responsible for indirect losses or damages arising from the use of the product.

Transportation costs for servicing are not covered by the warranty.

A service repair or replacement cannot exceed the value of the product under warranty; in no event shall the supplier be responsible or liable for special, incidental, consequential or indirect damages.

Dealer name and stamp:

Date of purchase:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.