
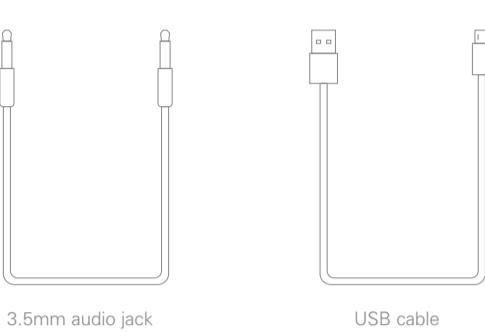
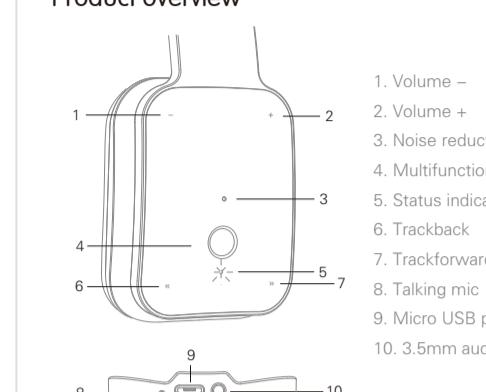
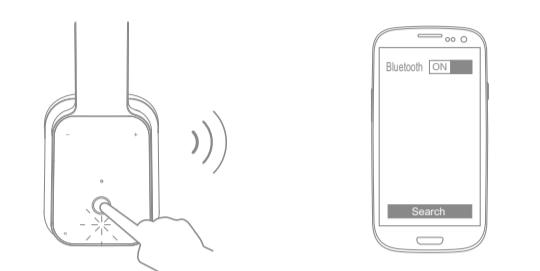
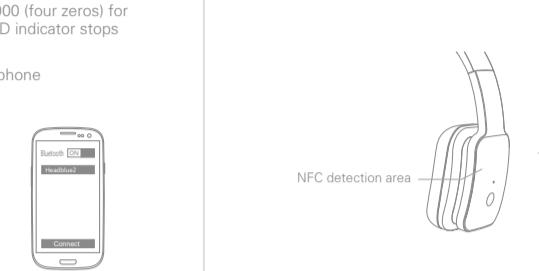
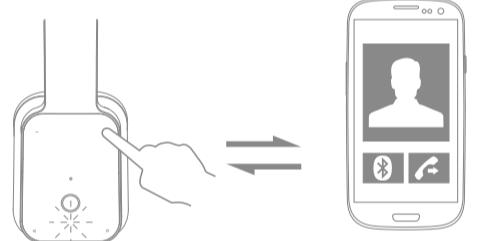
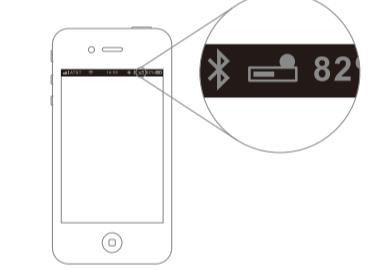
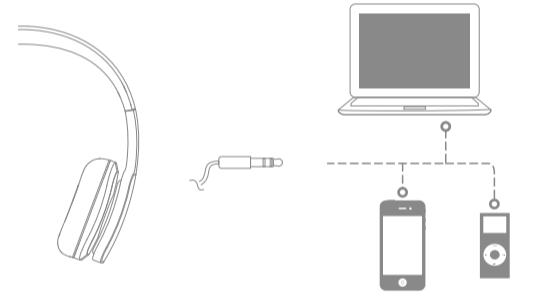


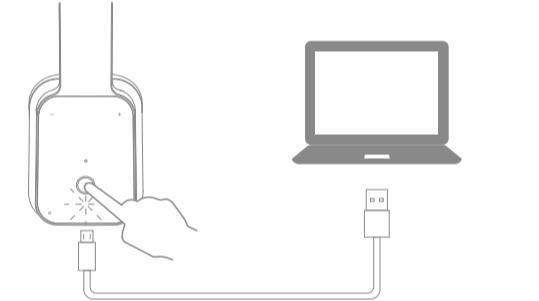


<h3>Start here</h3> <p>Following items are included</p>  <p>Product overview</p> 	<h3>Basic operation</h3> <p>Volume adjust Press the "+" or "-" button to turn volume up or down, you hear beep voice prompts once reach the maximum or minimum.</p> <p>LED indicator and voice prompts</p> <table border="1"> <thead> <tr> <th>Instruction</th> <th>LED status</th> <th>Voice prompts</th> </tr> </thead> <tbody> <tr> <td>Power on</td> <td>Flashes blue 3 times</td> <td>Power on</td> </tr> <tr> <td>Power off</td> <td>Flashes red 3 times</td> <td>Power off</td> </tr> <tr> <td>Paring</td> <td>Flashes red and blue alternately</td> <td>Pairing</td> </tr> <tr> <td>Standby</td> <td>Flashes blue twice every 5 seconds</td> <td>/</td> </tr> <tr> <td>Incoming call</td> <td>Flashes blue continuously</td> <td>/</td> </tr> <tr> <td>Battery low</td> <td>Flashes red twice every 2 seconds</td> <td>Battery low</td> </tr> <tr> <td>Charging</td> <td>Flashes red while charging Flashes blue once fully charged</td> <td>/</td> </tr> </tbody> </table>	Instruction	LED status	Voice prompts	Power on	Flashes blue 3 times	Power on	Power off	Flashes red 3 times	Power off	Paring	Flashes red and blue alternately	Pairing	Standby	Flashes blue twice every 5 seconds	/	Incoming call	Flashes blue continuously	/	Battery low	Flashes red twice every 2 seconds	Battery low	Charging	Flashes red while charging Flashes blue once fully charged	/	<h3>Pairing</h3> <p>Pair one phone</p> <ol style="list-style-type: none"> <li>1. Press and hold the Multifunction button for about 5 seconds, the LED indicator flashes red and blue alternately.</li> <li>2. Activate Bluetooth on your phone and set it to search for new devices.</li> <li>3. Select "Headblue2". If your phone asks, enter 0000 (four zeros) for the passcode or accept the connection. The LED indicator stops flashing red and blue once successfully paired.</li> </ol>  <p>Pair another phone</p> <ol style="list-style-type: none"> <li>1. Press and hold the Multifunction button for about 2 seconds to turn on the headphones.</li> <li>2. Hold an NFC device against the NFC zone of the headphones (right earcup). The LED indicator flashes red and blue alternately.</li> <li>3. Select "Headblue2". If your phone asks, enter 0000 (four zeros) for the passcode or accept the connection. The LED indicator stops flashing red and blue once successfully paired.</li> </ol>  <p>NFC pairing</p> <ol style="list-style-type: none"> <li>1. Press the multifunction button for about 2 seconds to turn on the headphones.</li> <li>2. Hold an NFC device against the NFC zone of the headphones (right earcup). The LED indicator flashes red and blue alternately.</li> <li>3. The LED indicator stops flashing red and blue once successfully paired.</li> <li>4. Restart "Headblue2", it connects to two paired phone automatically.</li> </ol> 	<h3>Call</h3> <p>Answer a call Press the multifunction button.</p> <p>End a call Press the multifunction button.</p> <p>Reject a call Press and hold the volume button "+" for about 2 seconds.</p> <p>Redial the last call Double-press the multifunction button in standby mode. The mobile phone will redial the last call number.</p> <p>Mute on/off Press the volume button "-" for about 2 seconds to mute on/off.</p>
Instruction	LED status	Voice prompts																									
Power on	Flashes blue 3 times	Power on																									
Power off	Flashes red 3 times	Power off																									
Paring	Flashes red and blue alternately	Pairing																									
Standby	Flashes blue twice every 5 seconds	/																									
Incoming call	Flashes blue continuously	/																									
Battery low	Flashes red twice every 2 seconds	Battery low																									
Charging	Flashes red while charging Flashes blue once fully charged	/																									

<h3>Music</h3> <p>(Need media player support)</p> <p>Switch between the headphone and phone Press the "+" button for about 2 seconds during a call, the call will be switched to the mobile phone, redo this operation again, the call will be switched to the headphone.</p> 	<h3>More features</h3> <p><b>Battery Indicator</b> When the headphone is connected to a device with iOS system, a battery indicator will appear at the upper right of the system, indicating battery status of the headphone.</p>  <p><b>Listen music via 3.5mm Jack</b> 1. Connect the headphone to a 3.5 mm jack connector on your mobile device or PC using the supplied music cable. 2. Turn on the music player on your mobile device or computer, you enjoy music from your headphone.</p>  <p><small>Note: Call functions are disabled in this mode.</small></p>	<h3>Charging</h3> <p>Your new headphone has enough power to pair and make a few calls. When battery is low, you will hear the voice prompt "battery low". It takes 2.5 hours to fully charge the headphone. While charging, the battery indicator light is red, the indicator light flashes blue once charging is complete.</p>  <p><small>Note: The lifetime of the battery will be significantly reduced if your headphone is left uncharged for a long period. We recommend that you recharge your headphone at least once a month.</small></p>	<h3>Power off</h3> <p>Press and hold the multifunction button for about 3 seconds. The red LED will flash three times rapidly before turning off. A voice prompt "power off" will appear, indicating the headphone has been turned off.</p> 	<h3>Hardware reset</h3> <p>Press and hold the multifunction button, connect the headphone to a USB charger or USB port of computer, the LED indicator flashes red, hardware reset is done in about 3 seconds.</p> 
---	---	---	---	---

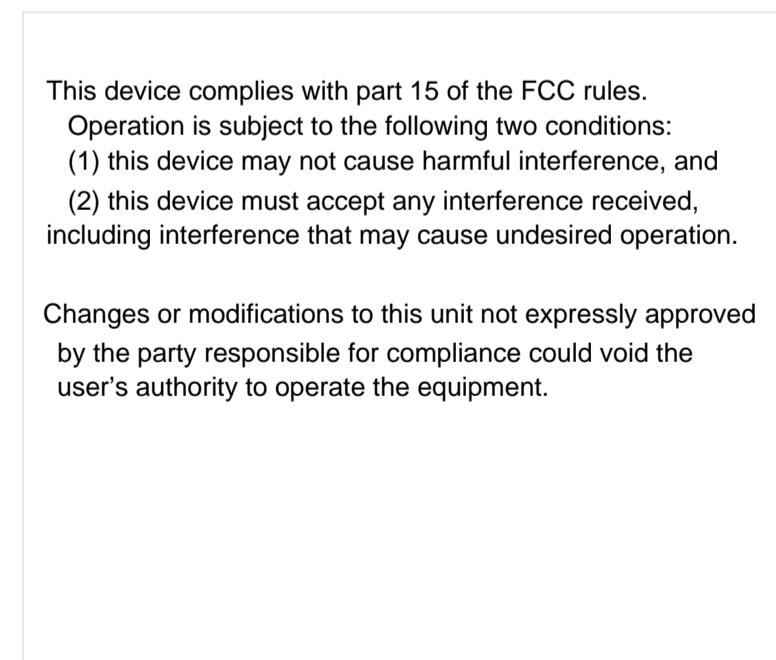

cannice

Bluetooth headset

FCC ID: AAIH02

Headblue 2 INSTRUCTION