



MEIG

Orbic Speed Pro 5G Antenna Spec.
FCC ID:2ABGH-R575L5

美格智能技术股份有限公司
MeiG Smart Technology Co., Ltd



1. Specifications
2. Antenna Characteristics
3. Radiation Patterns
4. Contact



1-1.Specifications- Summary parameters




Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni
Max. input power	5W
Planner Dimension	45*17mm
Casing	ABS
ANT Type	PIFA ANT
ANT model	<u>WiFi 1</u> , <u>WiFi 2</u>
Temperature Range	-40°C to 85°C
ANT manufacturer	<u>MeiG Smart Technology Co., Ltd</u> <u>2nd Floor,Office Building,No.5 Lingxia</u> <u>Road,Fenghuang,Fuyong</u> <u>Street,Bao'an District,Shenzhen</u>
test lab	<u>MeiG Smart Technology Co., Ltd</u> <u>2nd Floor,Office Building,No.5 Lingxia</u> <u>Road,Fenghuang,Fuyong</u> <u>Street,Bao'an District,Shenzhen</u>

1-2. Test instrument and test photo





Manufacturer: Keysight
Model: E5071C
Calibration: 2023.8.16-2024.8.16

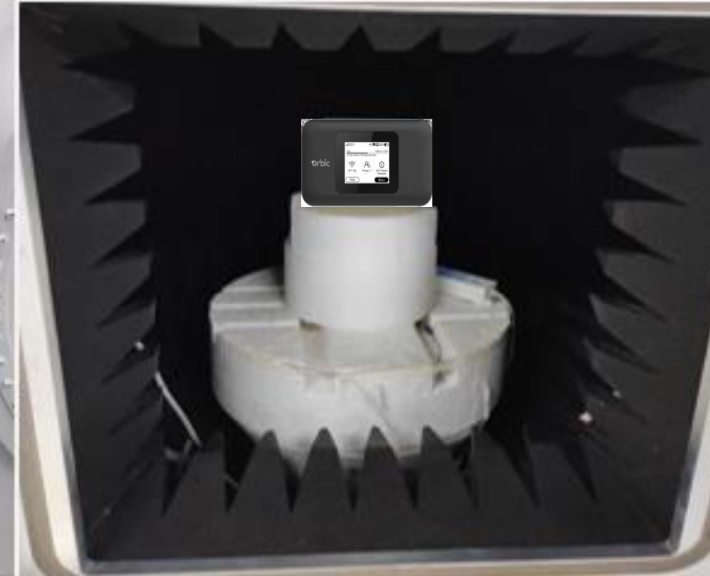

test photo


A0

ANT	BAND	GAIN	Efficiency
A0 (TX0)	W1	1. 82	45%
	W2/B2/N2	1. 75	42%
	B3	1. 56	41%
	B4	1. 5	42%
	W5/B5/N5	0. 86	50%
	B7	1. 92	40%
	W8	0. 91	46%
	B12	0. 73	42%
	B13	0. 8	42%
	B20	0. 88	40%
	B28	0. 83	43%
	B66/N66	1. 62	45%

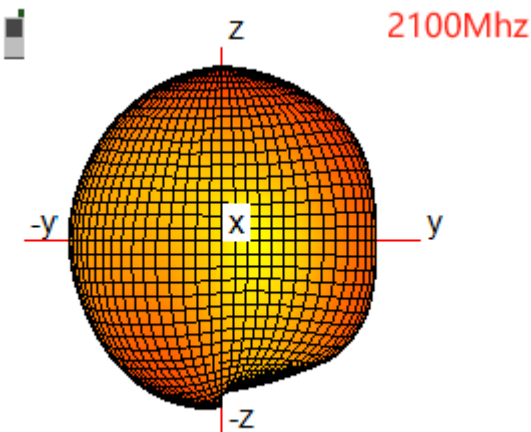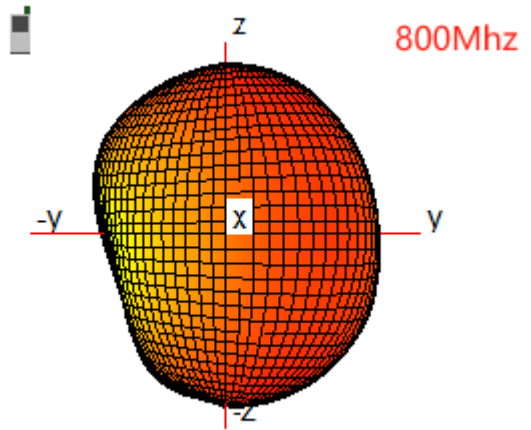


A2

ANT	BAND	GAIN	Efficiency
A2 (TX1)	B48/N48	0.7	45%
	N77	2.43	43%

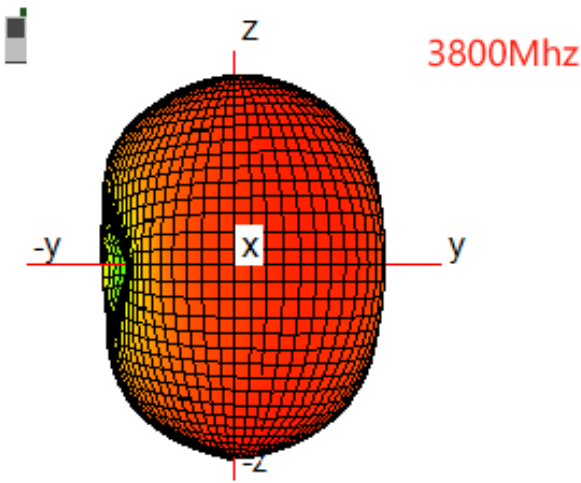


A4

ANT	BAND	GAIN	Efficiency
A4 (TX1)	B2/N2	1. 72	44%
	B4/N4	1. 84	43%
	B66/N66	1. 91	43%

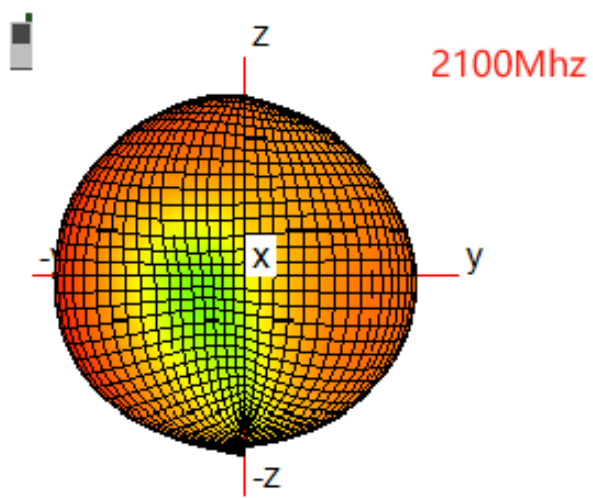



A5

ANT	BAND	GAIN	Efficiency
A5 (TX0)	B48/N48	0.8	44%
	N77	2.5	45%

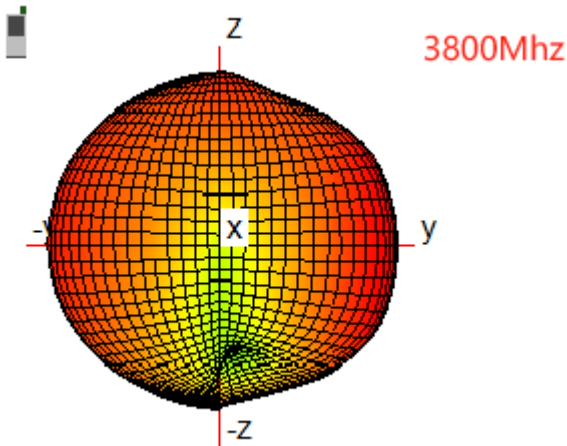

WiFi 0

ANT	BAND		GAIN	Efficiency
W0	2.4G	2400-2483.5MHz	0.72	40%
	5G	5150-5250MHz	1.43	45%
		5250-5350MHz	1.65	43%
		5470-5725MHz	1.92	43%
		5725-5850MHz	2.11	42%
	6G	5925-7125MHz	3.00	40%

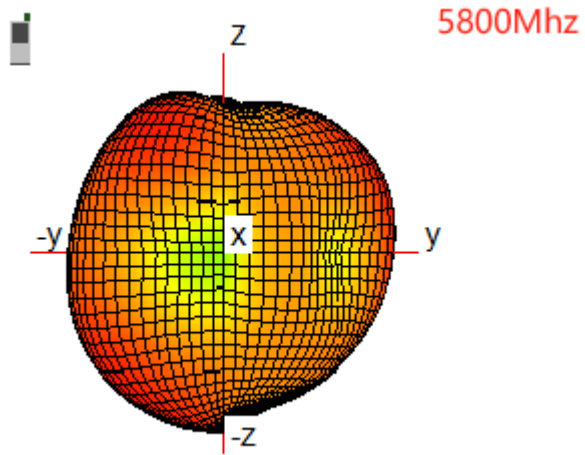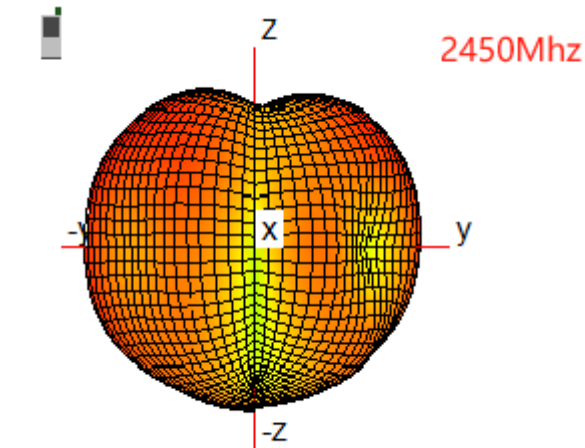

WiFi 1

ANT	BAND		GAIN	Efficiency
W1	2. 4G	2400-2483. 5MHz	0. 87	41%
	5G	5150-5250MHz	1. 36	44%
		5250-5350MHz	1. 54	42%
		5470-5725MHz	1. 88	43%
		5725-5850MHz	2. 23	45%
	6G (not support)	5925-7125MHz	3. 00	41%

