

All-in-one Bluetooth Adapter User Manual

B-840

Note: Please read this manual carefully before use B-840; please check for any special requirement or restriction about the use of Bluetooth wireless technology in your country

Technical Specifications:

1. Bluetooth Version: CSR V4.0+EDR Class 2
2. Frequency: 2.4GHz~2.48GHz
3. Profile supported: Headset and hands free, HSP ,A2DP ,AVRCP,APPLE AIRPLAY
4. APT-X technology, make sure voice with good quality
5. Operation range: 10 m
6. Talking time: 7~8 Hours
7. Music playing time: 6~7 Hours
8. Stand-by time: 150~180 Hours
9. NFC function (NFC= Bluetooth auto pairing)

Features and Functions:

- * Bluetooth receiver & Bluetooth audio adapter with Mic
- * Bluetooth Version: Bluetooth CSR V4.0+EDR
- * Bluetooth profile supported: HSP, A2DP, AVRCP and Apple AIRPLAY
- * 3.5mm plug audio cable compatible to most audio devices
- * Built-in Microphone: You can make the call hands free
- * Work as Stereo Bluetooth headphone, Bluetooth audio music, Bluetooth hands free car kit
- * Accessories: Headset, micro 5-pin cable, 3.5mm plug audio cable

Four Powerful functions:

1. NFC function (NFC = Bluetooth auto pairing)



If your phone has NFC function, Bluetooth auto pairing On/Off after first time pairing

2. Stereo Bluetooth headset, Enjoy music and make the Call hands free



MIC must face up, near the mouth

After pairing with your Bluetooth cellphone, you can enjoy music and calling from the Bluetooth cellphones or Bluetooth devices.

Important!! When talking on the phone, Mic must face up to ensure call quality.


3. Use as a Bluetooth hands free car kit



As a Bluetooth hands free car kit via standard 3.5mm audio cable and Bluetooth connection.

4. iPhone/ iPad/ Android / BlackBerry...etc. Bluetooth music receiver

Easily connect to Audio device via 3.5mm audio jack

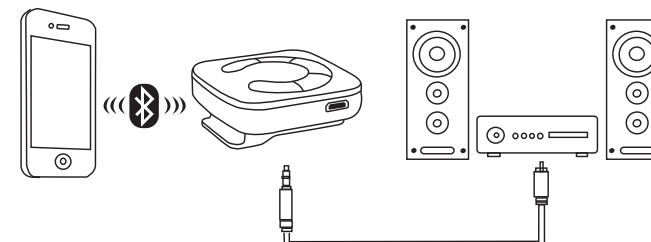

* Standard 3.5mm audio jack; Plug-and-play, easily connect to your audio devices, to receive music via Bluetooth

NFC function ----Bluetooth auto pairing



If your phone has NFC function ,Please download NFC software (NFC Easy contact) to your mobile phone .

Step 1: Make sure B-840 is in working model and mobile phone shows home page

Step 2 : You just make mobile phone touch the B-840 for 3 seconds, you will see on the screen “connecting B-840” ,then “connected B-840” ,so it is pairing well .

Step 3: If you want to close the Bluetooth , Please make mobile phone touch the B-840 for 3 seconds again , you will see one the screen “Disconnecting B-840” ,then Bluetooth pairing off.

Reminder: please touch the back of the cell phone, the NFC magnet is built-in the back of the cell phone

Charging


Connected the Bluetooth Receiver with Micro 5-pin USB cable, when you start charging, the Red LED will turn on and indicate that the unit is on charging, When B-840 is fully charged(2~3 hours), the Red LED will turn off.

Low Battery Warning

When the B-840 battery is low, you will hear a short BEEP , the Red LED will flash, and the speaker will make a BEEP sound.

Pairing with a Bluetooth enabled cell phone

1. Press and hold MFB key(Multifunction Button) for 3 seconds until you see red and blue light flashing alternatively.
2. Open your cellphone's Bluetooth and search for nearby Bluetooth devices. The cell phone will display “B-840” in the list of Bluetooth devices.
(If you are using a “dongle” type Bluetooth adapter, follow the manufacturer's instructions for that device.)
3. Select “B-840” to add this Bluetooth device into the list of paired devices.
4. If pairing successfully, blue light will flashing slowly every 3 seconds.

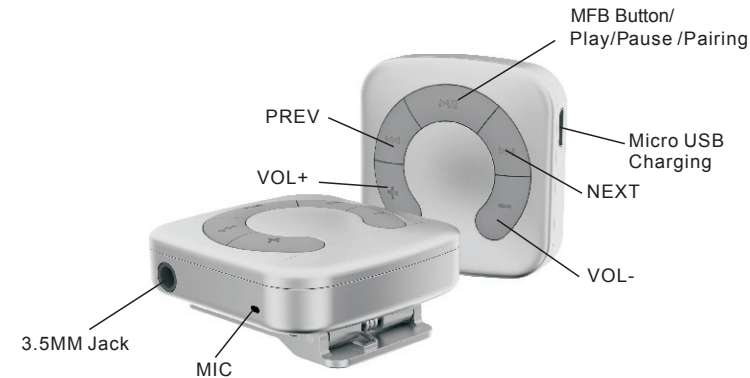

Multifunction Button(MFB Button)

Power on- Press and hold MFB Button for 5 seconds, you will see blue light flashing

Power off – Press and hold MFB Button for 5 seconds until you see red light

Pairing – Press and hold MFB Button for 5 seconds until you see red and blue light flashing alternatively. If pairing successfully, blue light will flashing slowly every 3 seconds

Play/pause- Press MFB Button once to play or pause current music.

Press MFB Button twice to redial last phone number

Answer a Call – Press MFB Button once to answer a call when someone calling.

Reject a Call – Press and hold MFB Button for 3 seconds to reject a call when someone calling.

End a Call – press MFB Button once to end a call.

In case of Bluetooth disconnecting , B-840 will be auto power off after 4 minutes

Vol+/Vol- Button

-Press button + to increase volume.

-Press button - to decrease volume.

PREV /NEXT Button:

-Press PREV button for previous song.

-Press NEXT button for next song.

Micro USB Charging:

Use micro 5-pin for charging.

MIC:

As a Microphone for talking.

It is important to talk towards the MIC to ensure good voices quality.

3.5MM Jack:

Use 3.5 audio cable connect with the headset、speaker or other audio devices

FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.