APPLICATION CERTIFICATION FCC Part 15B On Behalf of Shenzhen Aoweishi Technology Co.,Ltd

Black Pearl Model No.: RC801

FCC ID: 2ACIM-RC801

Prepared for : Shenzhen Aoweishi Technology Co.,Ltd

Address : Floor 6, Block 5, MengLiYuan Industrial Park, YouSong

Road, LongHua New District, ShenZhen, GuangDong,

518000, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD

Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

Tel: (0755) 26503290 Fax: (0755) 26503396

Report Number : ATE20140857
Date of Test : May 23-30,2014
Date of Report : Jun 03,2014

TABLE OF CONTENTS

Descrip	otion	Page
Test Re	eport Certification	
1. GE	NERAL INFORMATION	4
1.1.	Description of Device (EUT)	4
1.2.	Accessory and Auxiliary Equipment	
1.3.	Description of Test Facility	5
1.4.	Measurement Uncertainty	5
2. MI	EASURING DEVICE AND TEST EQUIPMENT	6
3. OP	ERATION OF EUT DURING TESTING	7
3.1.	Operating Mode	
3.2.	Configuration and peripherals	
4. TE	ST PROCEDURES AND RESULTS	
5. CC	ONDUCTED EMISSION FOR FCC PART 15 SECTION 15.107(A)	9
5.1.	Block Diagram of Test Setup.	
5.2.	The Emission Limit	
5.3.	Configuration of EUT on Measurement	
5.4.	Operating Condition of EUT	10
5.5.	Test Procedure	
5.6.	Power Line Conducted Emission Measurement Results	11
6. RA	DIATED EMISSION FOR FCC PART 15 SECTION 15.109(A)	20
6.1.	Block Diagram of Test Setup	20
6.2.	The Emission Limit For Section 15.109 (a)	
6.3.	EUT Configuration on Measurement	21

Operating Condition of EUT21

6.4.

6.5.

6.6.

Test Report Certification

Applicant : Shenzhen Aoweishi Technology Co.,Ltd

Manufacturer : Shenzhen Aoweishi Technology Co.,Ltd

EUT Description : Black Pearl

(A) MODEL NO.: RC801(B) SERIAL NO.: N/A

(C) POWER SUPPLY: AC 120V (Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B ANSI C63.4: 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test:	May 23-30,2014	
Prepared by:	7 -	
	Enz	
	(Eric, Engineer)	
Approved & Authorized Signer:	•	
T-FPT-0 (ed et 12001021200 81g.tot)	Lemily	
	(Sean Liu, Manager)	

1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : Black Pearl

Model Number : RC801

Power Supply : AC 120V (Adapter)

Applicant : Shenzhen Aoweishi Technology Co.,Ltd

Address : Floor 6, Block 5, MengLiYuan Industrial Park, YouSong

Road, LongHua New District, ShenZhen, GuangDong,

518000, China

Manufacturer : Shenzhen Aoweishi Technology Co.,Ltd

Address : Floor 6, Block 5, MengLiYuan Industrial Park, YouSong

Road, LongHua New District, ShenZhen, GuangDong,

518000, China

Date of sample received: May 23, 2014
Date of Test: May 23-30,2014

1.2. Accessory and Auxiliary Equipment

PC Manufacturer: LENOVO

M/N: E440

S/N: 20C5S00500

Adapter Manufacturer: Waiberlon

M/N:HLV1221TA

Input: AC 110-240V 50/60Hz Output: DC 12V 1750mA

1.3.Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee

for Laboratories

The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2

(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2

(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2

(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment


Kind of equipment	Manufacturer	Туре	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The modes are used: 1) HDMI+AV IN 2) 5.8 Receiver

3.2.Configuration and peripherals



(EUT: Black Pearl)

4. TEST PROCEDURES AND RESULTS


FCC Rules	Description of Test	Result
Section 15.107	Conducted Emission Test	Compliant
Section 15.109	Radiated Emission Test	Compliant

5. CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.107(A)


5.1.Block Diagram of Test Setup

5.1.1.Block diagram of connection between the EUT and simulators

5.1.1.1.For HDMI+AV IN



5.1.2. Shielding Room Test Setup Diagram

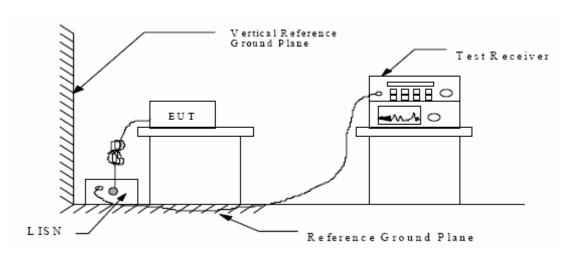

(EUT: Black Pearl)

5.2. The Emission Limit

5.2.1.Conducted Emission Measurement Limits According to Section 15.107(a)

Frequency	Limit d	Β(μV)
(MHz)	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

^{*} Decreases with the logarithm of the frequency.

5.3. Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.Black Pearl (EUT)

Model Number : RC801 Serial Number : N/A

Manufacturer : Shenzhen Aoweishi Technology Co.,Ltd

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3.Let the EUT work in modes (HDMI+AV IN, 5.8 Receiver) and measure it.

5.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : HD	MI+AV	IN (Ada	apter po	rt)			
MEASUREMENT	RESULT:	"RY05	28-1_f	in"			
5/28/2014 5:0							
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.179518 0.462379 21.433657	39.10 38.00 36.00	10.5 10.7 11.4	65 57 60	25.4 18.6 24.0	QP QP QP	L1 L1 L1	
MEASUREMENT	RESULT:	: "RY05	28-1_f	in2"			
5/28/2014 5:0							
Frequency MHz	Level dBµV				Detector	Line	PE
0.179518	36.20	10.5	55	18.3	AV	L1	
0.464229 21.605469	29.80 31.20	10.7	50	16.8 18.8	AV AV	L1 L1	GND GND
MEASUREMENT	RESULT	: "RY05	28-2_f	fin"			
5/28/2014 5:0			Timit	Manain	Datastan	Tino	DE
Frequency MHz	dBµV						PL
0.156109 0.460537	39.80	10.5	66	25.9	QP		GND
21.348264			60			N N	GND GND
MEACUDEMENT	DEGII M	. UDVAE	20 2 4	E i 0 !!			
MEASUREMENT		. K105	20-2_1	. 1112			
5/28/2014 5:0 Frequency		Transd	Limit	Margin	Detector	Line	PE
MHz	dΒμV	dB	dΒμV	dB			
0.156734	36.80	10.5	56	18.8	AV	N	GND
0.467950 21.605469	31.30 31.00		47 50			N N	GND GND

Emissions attenuated more than 20 dB below the permissible value are not reported. The spectral diagrams are attached as below.

Test mode : HI	OMI+AV	IN (PC	port)				
MEASUREMENT	RESULT:	"RY05	28-5 f	in"			
5/28/2014 5:1	5PM		_				
Frequency					Detector	Line	PE
0.153636 0.455055 1.108361	26.90 37.20 24.70	10.5 10.7 10.9	66 57 56	38.9 19.6 31.3	QP QP QP	L1 L1 L1	GND GND GND
MEASUREMENT	RESULT:	"RY05	28-5_f	in2"			
5/28/2014 5:1		_					
Frequency MHz	Level dBµV				Detector	Line	PE
0.330648 0.455055 1.112795	14.30 23.60	10.6 10.7	49 47	35.1 23.2	AV AV AV		GND
1.112/95	10.50	10.9	40	33.3	AV	пт	GND
MEASUREMENT	RESULT	: "RY05	528-6_:	fin"			
5/28/2014 5:2	20PM						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB		Line	PE
0.151807 0.456875	26.80	10.5	66	39.1	QP	N	GND
0.456875 1.108361			57 56		QP QP	N N	GND GND
MEASUREMENT	RESULT	: "RY05	528-6_:	fin2"			
5/28/2014 5:2		_ ,					
Frequency MHz	Level dBµV					Line	PE
0.353867 0.456875	14.70	10.6	49	34.2	AV	N	GND
0.456875 1.103946	24.30 11.00	10.7 10.9	47 46	22.4 35.0	AV AV	N N	GND GND

Emissions attenuated more than 20 dB below the permissible value are not reported. The spectral diagrams are attached as below.

Test mode : 5.8	Receives	•					
MEASUREMENT	RESULT:	"RY05	28-3_f	in"			
5/28/2014 5:0							
Frequency MHz	Level dBµV				Detector	Line	PE
0.153024 0.458702 21.519392	40.00 38.00 35.70	10.5 10.7 11.4	66 57 60	25.8 18.7 24.3	QP QP QP	N N N	GND GND GND
MEASUREMENT	RESULT:	"RY05	28-3_f	in2"			
5/28/2014 5:0		_					
Frequency MHz	Level dBµV				Detector	Line	PE
0.157990	36.00	10.5	56	19.6	AV		
0.446062 21.348264	29.80 31.00	10.7 11.4	47 50	17.1 19.0	AV AV	N N	GND GND
MEASUREMENT	RESULT	"RY05	28-4_1	in"			
5/28/2014 5:1							
Frequency MHz	Level dBµV				Detector	Line	PE
			-		0.70	. 1	CITE
0.153024 0.458702	45.40 39.90	10.5	57	20.4 16.8	QP QP	ь1 L1	GND
0.458702 2.754025	36.60	11.0	56	19.4	Q̈́Ρ	L1 L1	GND
MEASUREMENT	RESULT	"RY05	28-4_1	in2"			
5/28/2014 5:1		m 1	÷ · · · ·		5		
Frequency MHz	dBµV					Line	PE
0.154251 0.466086	36.50	10.5	56	19.3	AV	L1	GND
0.466086 2.820786	31.50 30.00	10.7	47 46	15.1	AV AV	L1 L1	GND

Emissions attenuated more than 20 dB below the permissible value are not reported. The spectral diagrams are attached as below.

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Black Pearl M/N:RC801

Manufacturer: Aoweishi
Operating Condition: HDMI+AV IN

Test Site: 1#Shielding Room

Operator: Ricky

Test Specification: L 120V/60Hz Comment: Adapter port

Report No.: ATE20140857


SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

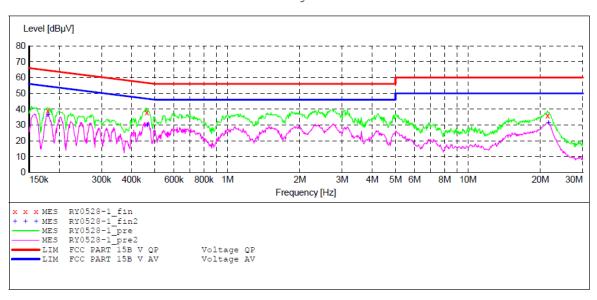

MEASUREMENT RESULT: "RY0528-1 fin"

5	/28/2014 5:0	1PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PΕ
	MHz	dΒμV	dB	dΒμV	dB			
	0.179518	39.10	10.5	65	25.4	QP	L1	GND
	0.462379	38.00	10.7	57	18.6	QP	L1	GND
	21.433657	36.00	11.4	60	24.0	OP	L1	GND

MEASUREMENT RESULT: "RY0528-1 fin2"

5/28/2014	5:01	.PM						
Freque	ency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.179	518	36.20	10.5	55	18.3	AV	L1	GND
0.464	229	29.80	10.7	47	16.8	AV	L1	GND
21.605	469	31.20	11.4	50	18.8	AV	L1	GND

CONDUCTED EMISSION STANDARD FCC PART 15B

Black Pearl M/N:RC801

Manufacturer: Aoweishi Operating Condition: HDMI+AV IN Test Site: 1#Shielding Room

Operator: Ricky

Test Specification: N 120V/60Hz Comment: Adapter port

Report No.: ATE20140857


SCAN TABLE: "V 150K-30MHz fin"

_SUB_STD_VTERM2 1.70 Short Description:

Start Stop Step Transducer

Frequency Frequency Width 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

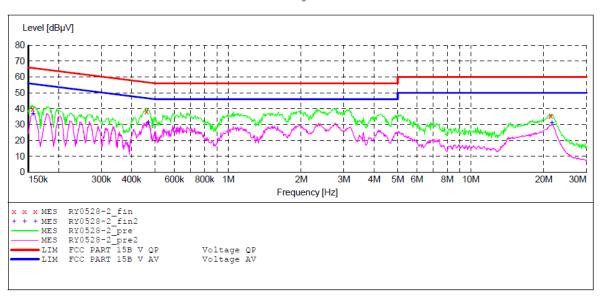

MEASUREMENT RESULT: "RY0528-2 fin"

5/28/2014	5:04PM						
Frequenc	y Level	Transd	Limit	Margin	Detector	Line	PE
MH	z dBµV	dB	dΒμV	dB			
0.15610	9 39.80	10.5	66	25.9	QP	N	GND
0.46053	7 38.20	10.7	57	18.5	QP	N	GND
21.34826	4 35.70	11.4	60	24.3	QP	N	GND

MEASUREMENT RESULT: "RY0528-2 fin2"

5/28/2014 5:0	4PM						
Frequency MHz	Level dBµV			Margin dB	Detector	Line	PE
0.156734	36.80	10.5	56	18.8	AV	N	GND
0.467950	31.30	10.7	47	15.3	AV	N	GND
21.605469	31.00	11.4	50	19.0	ΑV	N	GND

CONDUCTED EMISSION STANDARD FCC PART 15B

Black Pearl M/N:RC801 EUT:

Manufacturer: Aoweishi Operating Condition: HDMI+AV IN Test Site: 1#Shielding Room

Operator: Ricky Test Specification: N 120V/60Hz

PC port Comment:

Report No.:ATE20140857


SCAN TABLE: "V 150K-30MHz fin"

_SUB_STD_VTERM2 1.70 Short Description:

Detector Meas. IF
Time Bandw. IF Start Stop Step Transducer

Frequency Frequency Width 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz 4.5 kHz NSLK8126 2008

Average

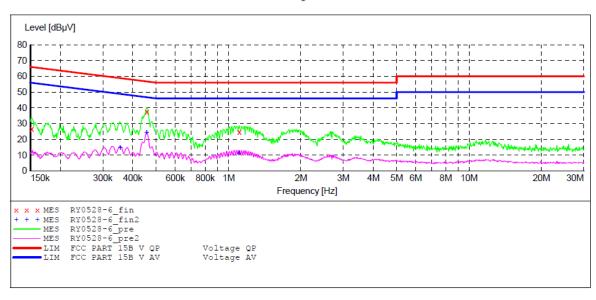

MEASUREMENT RESULT: "RY0528-6 fin"

5/	28/2014 5 : 2	0PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dBuV	dB	dBuV	dB			
		- F		-				
	0.151807	26.80	10.5	66	39.1	OP	N	GND
	0.456875	37.50			19.2	~	N	GND
						~		
	1.108361	24.70	10.9	20	21.2	QP	N	GND

MEASUREMENT RESULT: "RY0528-6 fin2"

5/28/2014 5:2	0PM						
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.353867	14.70	10.6	49	34.2	AV	N	GND
0.456875	24.30	10.7	47	22.4	AV	N	GND
1.103946	11.00	10.9	46	35.0	AV	N	GND

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Black Pearl M/N:RC801

Manufacturer: Aoweishi Operating Condition: HDMI+AV IN Test Site: 1#Shielding Room

Operator: Ricky Test Specification: L 120V/60Hz PC Port Comment:


Report No.:ATE20140857

SCAN TABLE: "V 150K-30MHz fin"
Short Description: __SUB_STD_VTERM2 1.70

Start Step Detector Meas. IF Stop Transducer Time Bandw.

Frequency Frequency Width 150.0 kHz 30.0 MHz 4.5 kH QuasiPeak 1.0 s NSLK8126 2008 4.5 kHz 9 kHz

Äverage

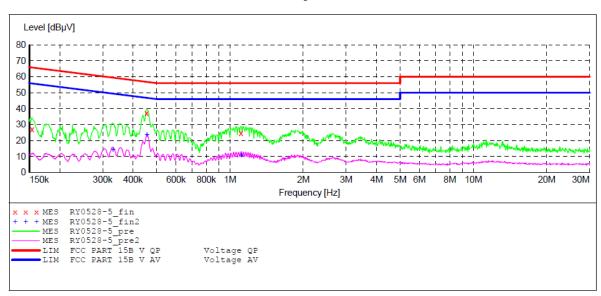

MEASUREMENT RESULT: "RY0528-5 fin"

5/	28/2014 5 : 1	.5PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PΕ
	MHz	dΒμV	dB	dΒμV	dB			
	0.153636	26.90	10.5		38.9	QP	L1	GND
	0.455055	37.20	10.7	57	19.6	QP	L1	GND
	1.108361	24.70		56	31.3	QP	L1	GND

MEASUREMENT RESULT: "RY0528-5 fin2"

5/28/2014	4 5:15	PM						
Freque	ency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dΒμV	dB	dΒμV	dB			
0.330	0648	14.30	10.6	49	35.1	AV	L1	GND
0.459	5055	23.60	10.7	47	23.2	AV	L1	GND
1.112	2795	10.50	10.9	46	35.5	AV	L1	GND

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Black Pearl M/N:RC801

Manufacturer: Manufacturer: Aoweishi
Operating Condition: 5.8 Receiver 1#Shielding Room Test Site:

Operator: Ricky

Test Specification: N 120V/60Hz

Comment:

Report No.:ATE20140857


SCAN TABLE: "V 150K-30MHz fin"

_SUB_STD_VTERM2 1.70 Short Description:

Detector Meas. IF
Time Band
QuasiPeak 1.0 s 9 kH Start Step Stop Transducer Bandw.

Frequency Frequency Width 150.0 kHz 30.0 MHz 4.5 kH 4.5 kHz 9 kHz NSLK8126 2008

Average

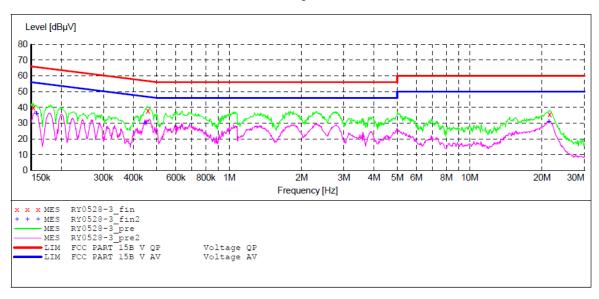

MEASUREMENT RESULT: "RY0528-3 fin"

5/28/2014	5:08PM						
Frequen	cy Level	Transd	Limit	Margin	Detector	Line	PΕ
M	Hz dBµV	dB	dΒμV	dB			
0.1530	24 40.00	10.5	66	25.8	QP	N	GND
0.4587	02 38.00	10.7	57	18.7	QP	N	GND
21.5193	92 35.70	11.4	60	24.3	QP	N	GND

MEASUREMENT RESULT: "RY0528-3 fin2"

5/28/2014 5:0)8PM						
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.157990	36.00	10.5	56	19.6	AV	N	GND
0.446062	29.80	10.7	47	17.1	AV	N	GND
21.348264	31.00	11.4	50	19.0	AV	N	GND

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Black Pearl M/N:RC801

Manufacturer: Aoweishi Operating Condition: 5.8 Receiver Test Site: 1#Shielding Room

Ricky Operator:

Test Specification: L 120V/60Hz

Comment:

Report No.:ATE20140857


SCAN TABLE: "V 150K-30MHz fin"

_SUB_STD_VTERM2 1.70 Short Description:

UB_STD_viblu. Detector Meas. IF Stop Start Step Transducer

Frequency Frequency Width 150.0 kHz 30.0 MHz 4.5 kH 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

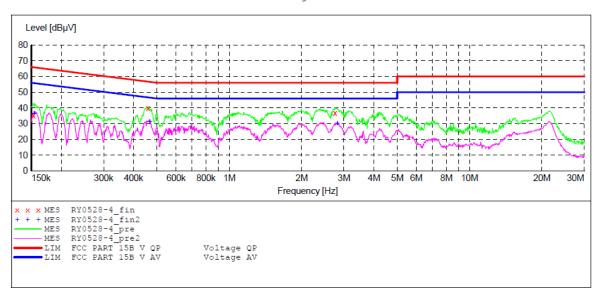

MEASUREMENT RESULT: "RY0528-4 fin"

5/	28/2014 5:1	1PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dΒμV	dB	dΒμV	dB			
	0.153024	45.40	10.5	66	20.4	QP	L1	GND
	0.458702	39.90	10.7	57	16.8	QP	L1	GND
	2.754025	36.60	11.0	56	19.4	QP	L1	GND


MEASUREMENT RESULT: "RY0528-4 fin2"

5/	28/2014 5:1	1PM						
	Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
	0.154251	36.50	10.5	56	19.3	AV	L1	GND
	0.466086	31.50	10.7	47	15.1	AV	L1	GND
	2.820786	30.00	11.0	46	16.0	AV	L1	GND


6. RADIATED EMISSION FOR FCC PART 15 SECTION 15.109(A)

6.1.Block Diagram of Test Setup

6.1.1.Block diagram of connection between the EUT and simulators



6.1.2.Semi-Anechoic Chamber Test Setup Diagram

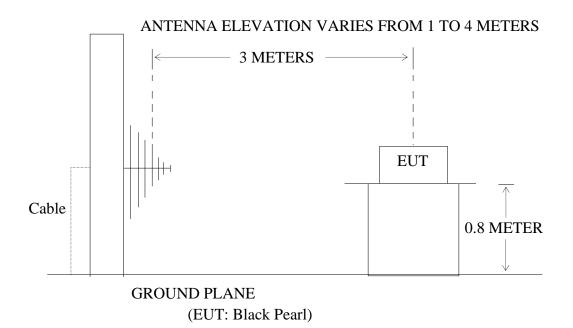

6.2. The Emission Limit For Section 15.109 (a)

6.2.1.Radiation Emission Measurement Limits According to Section 15.109 (a).

	Lir	nit
Frequency (MHz)	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value $(dB\mu V/m)$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

6.3.EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1.Black Pearl (EUT)

Model Number : RC801 Serial Number : N/A

Manufacturer : Shenzhen Aoweishi Technology Co.,Ltd

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in (HDMI+AV IN,5.8 Receiver) mode measures it.

6.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz

The frequency range from 30MHz to 1000MHz is checked.

The highest frequency of the internal sources of the EUT is 480MHz higher than 108MHz; The measurement shall be made above 1GHz.

6.6. The Emission Measurement Result **PASS.**

Below 1G(H	DMI+A	AV IN)							
Polarization									
No. Freq. Reading Factor Result Limit (dBuV/m) Margin (dBuV/m) (dBuV/m) Detector									
Horizontal	1	189.0743	59.69	-21.04	38.65	43.50	-4.85	QP	
	2	236.6447	51.02	-19.82	31.20	46.00	-14.80	QP	
	3	331.3546	46.35	-16.92	29.43	46.00	-16.57	QP	
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Vertical	1	236.6447	45.02	-19.82	25.20	46.00	-20.80	QP	
	2	426.5210	44.57	-15.27	29.30	46.00	-16.70	QP	
	3	568.6127	43.49	-12.40	31.09	46.00	-14.91	QP	
Above 1G(F	IDMI+	AV IN)							
Polarization									
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Horizontal	1	1515.413	45.19	-11.34	33.85	74.00	-40.15	peak	
	2	1666.376	45.01	-10.53	34.48	74.00	-39.52	peak	
	3	4059.890	46.05	-1.18	44.87	74.00	-29.13	peak	
No. Freq. Reading Factor Result Limit Margin (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m)									
Vertical	1	3075.394	45.76	-4.68	41.08	74.00	-32.92	peak	
	2	3227.832	45.37	-4.25	41.12	74.00	-32.88	peak	
	3	3530.356	47.23	-2.89	44.34	74.00	-29.66	peak	

Below 1G(5.	8 Rec	eiver)								
Polarization										
No. Freq. Reading Factor Result Limit Margin (dBuV/m) (dB) (dBuV/m) (dBuV/m) Detector										
Horizontal 1 141.8262 50.56 -23.56 27.00 43.50 -16.50 QF										
	2	189.0743	59.98	-21.04	38.94	43.50	-4.56	QP		
	3	473.8347	49.31	-14.22	35.09	46.00	-10.91	QP		
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		
Vertical	1	189.0743	49.86	-21.04	28.82	43.50	-14.68	QP		
	2	283.9791	48.79	-18.19	30.60	46.00	-15.40	QP		
	3	426.5210	44.39	-15.27	29.12	46.00	-16.88	QP		
Above 1G(5	.8 Red	ceiver)								
Polarization										
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		
Horizontal	1	2742.200	45.29	-6.19	39.10	74.00	-34.90	peak		
	2	2951.232	45.12	-5.56	39.56	74.00	-34.44	peak		
	3	3505.144	45.54	-2.98	42.56	74.00	-31.44	peak		
No. Freq. Reading Factor Result Limit Margin (MHz) (dBuV/m) (dB) (dBuV/m) (dBuV/m) (dB)										
Vertical	1	1842.254	44.53	-9.58	34.95	74.00	-39.05	peak		
	2	3581.325	45.67	-2.69	42.98	74.00	-31.02	peak		
	3	4926.683	46.53	1.18	47.71	74.00	-26.29	peak		

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

- 3. The spectral diagrams are attached as below display the measurement of peak values
- 4. The average measurement was not performed when peak measured data under the limit of average detection.



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #77

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %


EUT: Black Pearl Mode: HDMI+AV IN

Model: RC801 Manufacturer: Polarization: Vertical Power Source: AC 120V

Date: 14/05/30/ Time: 9/32/58

Engineer Signature: LGWADE

Distance: 3m

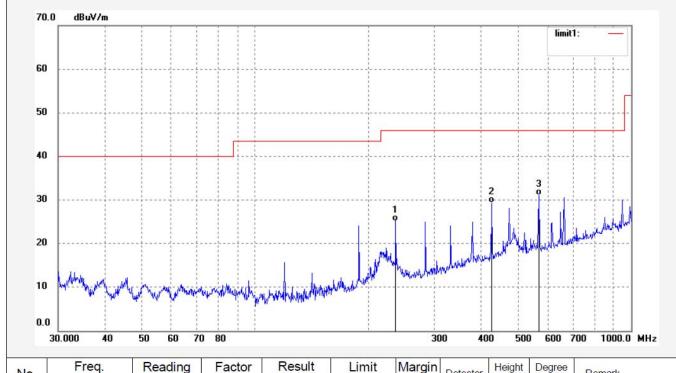

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)		Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	236.6447	45.02	-19.82	25.20	46.00	-20.80	QP			
2	426.5210	44.57	-15.27	29.30	46.00	-16.70	QP			
3	568.6127	43.49	-12.40	31.09	46.00	-14.91	QP			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #78

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %


EUT: Black Pearl Mode: HDMI+AV IN

Model: RC801 Manufacturer: Polarization: Horizontal Power Source: AC 120V

Date: 14/05/30/ Time: 9/34/40

Engineer Signature: LGWADE

Distance: 3m

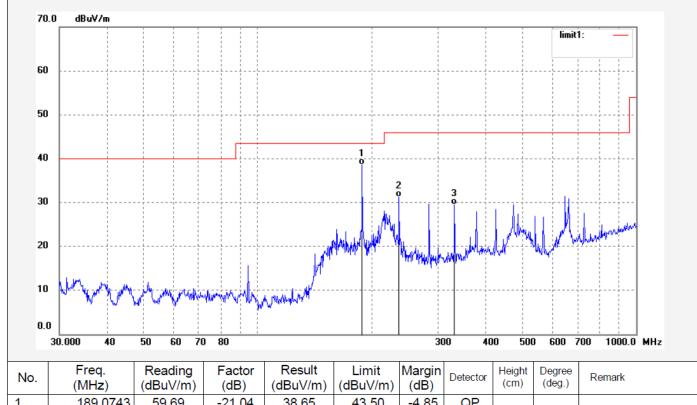

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0743	59.69	-21.04	38.65	43.50	-4.85	QP			
2	236.6447	51.02	-19.82	31.20	46.00	-14.80	QP			
3	331.3546	46.35	-16.92	29.43	46.00	-16.57	QP			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #75

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Black Pearl Mode: 5.8 Receiver Model: RC801

Manufacturer:


Polarization: Horizontal

Power Source: AC 120V

Date: 14/05/30/ Time: 9/29/36

Engineer Signature: LGWADE

Distance: 3m

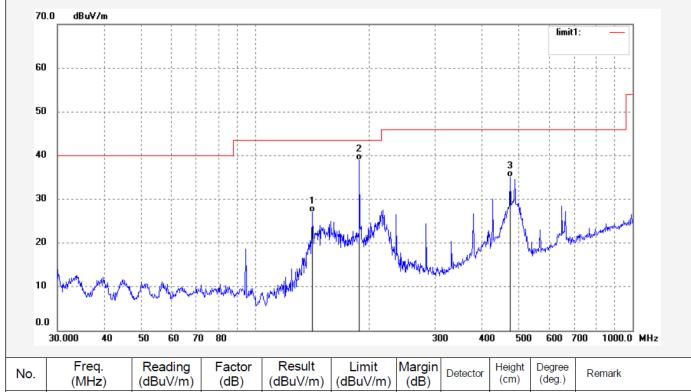

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	141.8262	50.56	-23.56	27.00	43.50	-16.50	QP			
2	189.0743	59.98	-21.04	38.94	43.50	-4.56	QP			
3	473.8347	49.31	-14.22	35.09	46.00	-10.91	QP			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #76

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Black Pearl Mode: 5.8 Receiver Model: RC801

Manufacturer:


Polarization: Vertical

Power Source: AC 120V

Date: 14/05/30/ Time: 9/31/01

Engineer Signature: LGWADE

Distance: 3m

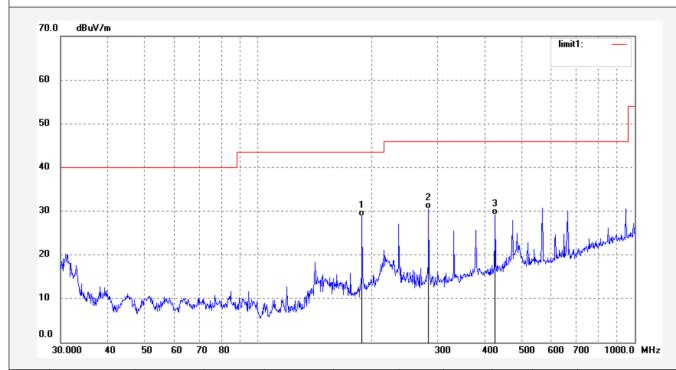

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0743	49.86	-21.04	28.82	43.50	-14.68	QP			
2	283.9791	48.79	-18.19	30.60	46.00	-15.40	QP			
3	426.5210	44.39	-15.27	29.12	46.00	-16.88	QP			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #83 Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Black Pearl Mode: HDMI+AV IN


Model: RC801 Manufacturer: Polarization: Horizontal

Power Source: AC 120V

Date: 14/05/30/ Time: 9/45/10

Engineer Signature: LGWADE

Distance: 3m

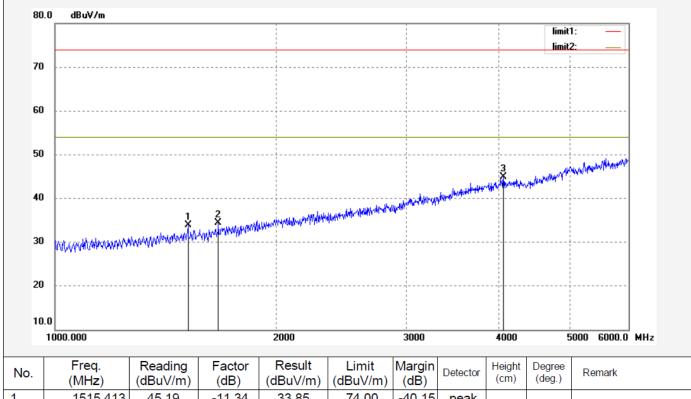

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)		Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1515.413	45.19	-11.34	33.85	74.00	-40.15	peak			
2	1666.376	45.01	-10.53	34.48	74.00	-39.52	peak			
3	4059.890	46.05	-1.18	44.87	74.00	-29.13	peak			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #84 Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Black Pearl Mode: HDMI+AV IN


Model: RC801 Manufacturer: Polarization: Vertical

Power Source: AC 120V Date: 14/05/30/

Engineer Signature: LGWADE

Distance: 3m

Time: 9/46/08

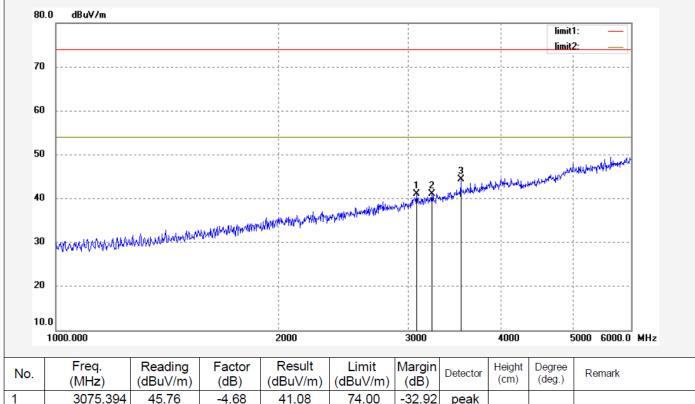



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #85 Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Black Pearl Mode: 5.8 Receiver

Model: RC801 Manufacturer:


Polarization: Vertical

Power Source: AC 120V

Date: 14/05/30/ Time: 9/46/50

Engineer Signature: LGWADE

Distance: 3m

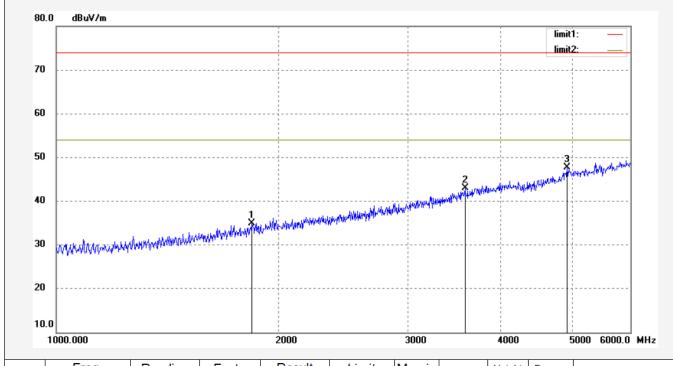

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1842.254	44.53	-9.58	34.95	74.00	-39.05	peak			
2	3581.325	45.67	-2.69	42.98	74.00	-31.02	peak			
3	4926.683	46.53	1.18	47.71	74.00	-26.29	peak			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: rucky3 #86 Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %


EUT: Black Pearl Mode: 5.8 Receiver

Model: RC801 Manufacturer: Polarization: Horizontal Power Source: AC 120V

Date: 14/05/30/ Time: 9/48/15

Engineer Signature: LGWADE

Distance: 3m

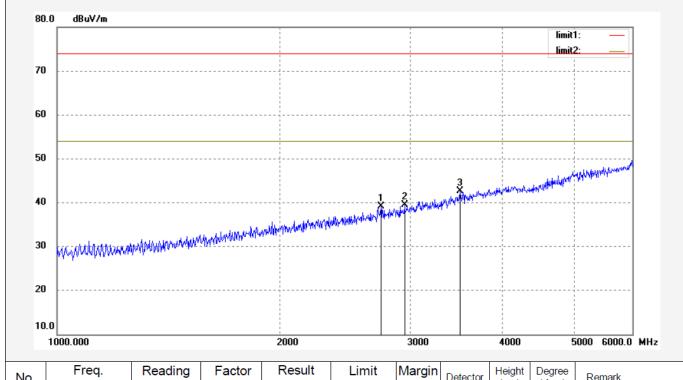

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2742.200	45.29	-6.19	39.10	74.00	-34.90	peak			
2	2951.232	45.12	-5.56	39.56	74.00	-34.44	peak			
3	3505.144	45.54	-2.98	42.56	74.00	-31.44	peak			