


110.0 mm

80.0 mm

SCUD Bluetooth Headset

SBH-102



Introduction

About your headset

with the SCUD Bluetooth Mono headset SBT-102, you can handle calls hands-free, even when using two phones at the same time. Read this user guide carefully before using the product. Also, read the user guide for the device that you connect to the product.

About Bluetooth connectivity

You can use Bluetooth to make a wireless connection to other compatible devices, such as mobile phones. Devices don't need to be in direct line-of-sight, but they must be within 10 metres of each other. The connection may be affected by obstructions such as walls or other electronic devices.

This device is compliant with Bluetooth specification 3.0 +EDR supporting the following profiles: headset profile (1.1), handsfree profile(1.5). Check with the manufactures of other devices to determine their compatibility with this device.

Product Parameter

Bluetooth headset version	V3.0+EDR
Bluetooth headset mode	Hands free / headset profile
Radio frequency	2.4GHz
Transmit power	Class 2
Transmit range	approximate 10M
Charging time	approximate 2-3 hours
Talking time	approximate 4 hours
Standby time	approximate 120 hours
Environment Temperature	-10°C - 45°C(14°F- 113°F)
Working Voltage	3.4V - 4.2V
Charge Input	5V \equiv 500mA max

Make calls

Make and receive calls

To make and receive calls using your headset, you need to connect it to your phone.

Make a call - Enter the phone number on your phone and press call control button, the call automatically transfers to the Bluetooth headset.

Answer a call - Press multifunction key to answer a call.

End a call - Press multifunction key to end a call.

Decline a call - Press multifunction key twice.

Switch a call between your headset and phone - Press and hold multifunction key for 2 seconds.

Redial the last call number - Press multifunction key twice.

Handle calls from two phones

Continue an ongoing call, and decline a call on another phone - press multifunction key twice.

End an ongoing call, and answer a call on another phone - press multifunction key.

Put an ongoing call on hold, and answer a call on another phone - press and hold multifunction key for 2 seconds.

Switch between active and held calls - press and hold multifunction key for 2 seconds.

End an ongoing call, and go back to a held call - press multifunction key.

Change the volume

Set the volume by press the voice control button.

Product and safety information Driving safety

Obey all local laws. Always keep your hands free to operate the vehicle while driving. Your first consideration while driving should be road safety.

Battery information

This device has an internal, nonremovable, rechargeable battery. Do not attempt to remove the battery from the devices as you may damage the device. Always keep the battery between -10°C and 45°C (14°F and 113°F). Extreme temperatures reduce the capacity and lifetime of the battery. A device with a hot or cold battery may not work temporarily. Do not dispose of batteries in a fire as they may explode. Dispose of batteries according to local regulations. Recycle when possible. Do not dispose as household waste.

Product Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.


If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the

Get started

Keys and parts

1. Charger connector
2. Indicator light
3. Multifunction key
4. Voice control button
5. Earpiece
6. Microphone

Charger the battery

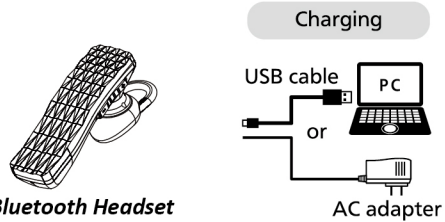

1. Connect SBH-102 and computer or AC adapter with micro-usb cable like the way show in above picture.
2. When charging, the indicator light turns to red.
3. Indicator light turns to blue after fully charged.
4. Pull out the cable after fully charged.

Check the battery charge

When the headset is switched on and you've not in a call, press multifunction key. A blue light means there is enough power. If the light is red, recharge the battery.

Switch the headset on or off

Switch on - press and hold multifunction key for 2 seconds, a blue indicator light flashes quickly.

Switch off - Press and hold multifunction key for 3 seconds to switch the headset off, a red indicator light flashes quickly.

Pair the device

Pair and connect the headset to your phone

Before using the headset, you must pair and connect it to a compatiable phone. You can pair your headset with 8 phones, but you can only connect it to a maximum of 2 phones at the same time. With some phones, you may need to make the connection separately after pairing. When the headset is connected to a phone, the Bluetooth indicator light flashes slowly.

Pair the headset manually

1. Make sure your headset is switched off and your compatible phone is on.
 2. If you've never paired the headset with a device, or you've cleared the pairings, switch the headset on. If you've previously paired your headset with another device, press and hold multifunction key for 5 seconds. Pairing model is switched on, and a blue and red indicator lights starts to flash quickly.
 3. Within 3 minutes, switch Bluetooth on in your phone, then set it to search for Bluetooth devices. For details, see the user guide of the phone.
 4. On your phone, select the headset from the list of found devices.
- In some devices, you may need to make the connection separately after pairing.

Pair and connect the headset to two devices

1. Make sure Bluetooth is switched on in both phone.
2. To switch the headset off, press and hold multifunction key for 5 seconds.
3. Press and hold multifunction key for 5 seconds to switch pairing mode on, then pair the headset with the second phone.
4. Switch the headset off and back on. The headset connects to both phones.

following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC NOTICE

This device complies with Part 15 of the FCC rules . Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CAUTION

caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Warning:



To prevent possible hearing damage, do not listen at high volume levels for long periods.

Product warranty card

User name: _____

Tel: _____

Address: _____

Product name: _____

Product model: _____

Purchase date: _____

Product fault description:

Saler's information

Tel: _____

Sale's date: _____

