



Q Station Quick Installation Guide For Android

1.Installation



Figure 1: Power up Q Station

Installation Steps:

- 1) Plug in Power Adapter to Q Station.
- 2) Connect the Q Station to the LAN of your Home Router with LAN cable (optional). (If you want to connect internet wirelessly, please refer to Q Station User Guide.)
- 3) Connect the Audio Cable from your Q Station to the AUX of your stereo or speaker.
- 4) Make sure the indicator light of Q Station is blinking with red (left) and blue (right).
- 5) Screw-in the Q Bulbs.

2.Connect your smart device to WiFi

By changing your WiFi connection to “bellnetXXXXXX”, you will connect to the Q Station.

Notice:

- By default, Q Station SSID is “bellnetXXXXXX”. No Encryption. (XXXXXX is the last 6 digit of your MAC)
- Once it is successfully connected to the Q Station, the right indicator light should be a steady blue color. Otherwise it will be blinking.



Figure 2: Connect Q Station SSID

3.Play music & Light show(use your smart phone)

- 1) Install any music APP which supports DLNA protocol (e.g. BubbleUPnP).
- 2) Run BubbleUpnp. (Figure 3)
- 3) Add one song in PLAYLIST.
- 4) In RENDERER, choose “bellmusicXXXXXX”. (Figure 4)
- 5) Click “Play” button to play music.

Notice:

- By default, Q Station Speaker Name is “bellmusicXXXXXX”. (XXXXXX is the last 6 digit of your MAC)
- DLNA protocol allows you to stream music to the stereo or speaker which is connected to the Q Station. And the Q Bulbs will blink synchronously with your music.

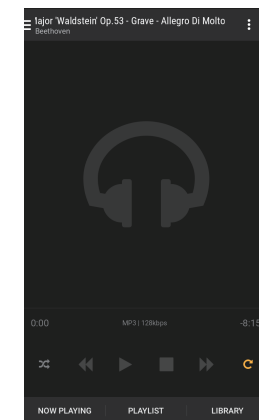


Figure 3: Use BubbleUPnP to play music

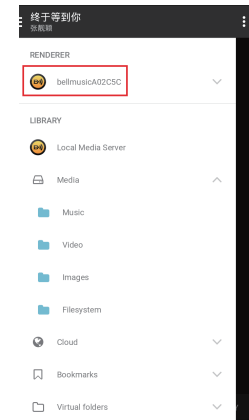


Figure 4: RENDERER choose “bellmusicXXXXXX” (e.g bellmusicA02C5C)

4.Lighting Control

Install BellQ

- 1) Search the APP “BellQ” in Google Play. Download and install it.
- 2) Run it.

Light Control

- 1) Click first.
- 2) Click Device SN (e.g. MQ1ACXXX00000XXX).
- 3) Click the LED ID (e.g. lightX MD1ACXXX00000XXX) to enter Light Control Page.

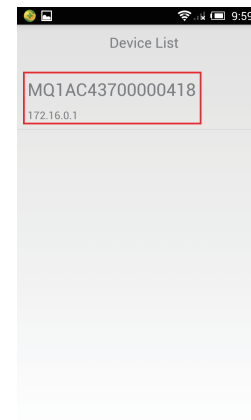


Figure 5: Click Device SN

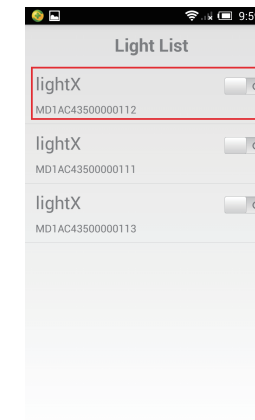


Figure 6: Click LED ID



Figure 7: Light Control Page

On Light Control Page

- 1) Click ON or OFF to turn on and turn off the LED Bulbs.
- 2) Slide the little circle to adjust the color of LED.
- 3) Move the intensity bar to adjust the brightness.

Notice:

The number at the lower left of the big circle means the brightness.

On BellQ main page, click to enter Network page:

Set password for your Q Station SSID

Click **Basic Settings** to modify the Q Station SSID & Password.

Change your speaker name

Click **Music Service** to modify the Speaker Name.

Connect to internet wirelessly

Click **Internet Connection** to connect to other WiFis.

On BellQ main page, click to enter Music List:

- 1) Select one song to enter Play Music Page.
- 2) Click to play the song. By default, it will play on mobile.
- 3) Click Speaker Name “bellmusicXXXXXX” (e.g. bellmusicA02C5C) to control play on mobile/ sound equipment. (XXXXXX is the last 6 digit of your MAC)

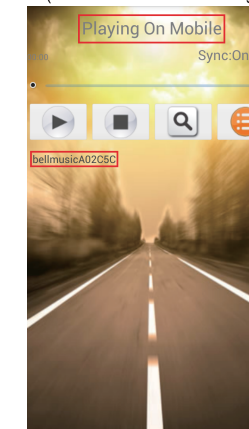


Figure 8: Play on mobile

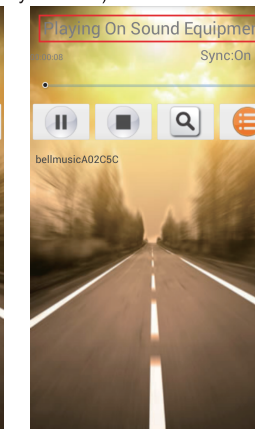


Figure 9: Play on Sound Equipment

FCC NOTE:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC NOTE:

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

(For more details, you can refer to Q Station User Guide from belLEDs.com.)