




Wireless Speaker & Alarm Clock  
with USB phone charger and dual alarms

CA-50i USER GUIDE



- 11 POWER ON LED indicator
- 12 BLUETOOTH LED indicator
- 13 ALARM 1 LED indicator
- 14 ALARM 2 LED indicator
- 15 PM LED indicator
- 16 SPEAKER
- 17 DC IN socket
- 18 AUX IN socket



# HELLO,

Thanks for choosing a Capello clock.

We believe in the simple joy of nicely designed products. We create electronics with modern features and delight in making them accessible to everyone.

We hope that you enjoy your new alarm clock. If you need help setting it up or just want to say hello,


visit us at:

[hellocapello.com](http://hellocapello.com)

or contact support via email at:

[support@hellocapello.com](mailto:support@hellocapello.com)

## LOCATION & DESCRIPTION OF CONTROLS

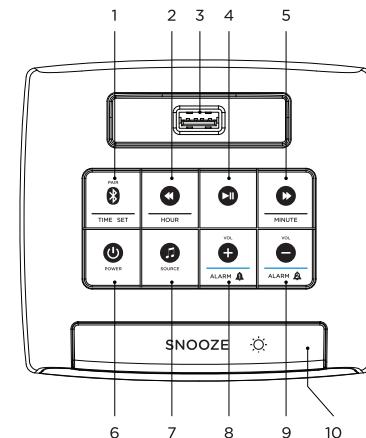

1 BLUETOOTH/TIME SET button	6 POWER button
2 HOUR/BACKWARD button	7 SOURCE button
3 USB socket	8 ALARM 1/VOL+ button
4 PLAY/PAUSE button	9 ALARM 2/VOL- button
5 MINUTE/FORWARD button	10 SNOOZE/DIMMER button



### INSIDE THE BOX

CA-50i Wireless Alarm Clock with USB Charging  
AC power adapter and user guide



### PLUGGING IN YOUR CLOCK

1. Insert the small end of the AC adapter into the DC In Jack (located on the rear of the unit).
2. Connect the other end to a wall outlet providing 100-240V AC, 50/60Hz.

The output of the provided AC/DC Adaptor is DC 5V, 1.5A. For battery backup 4 x 1.5V AAA (not included).

NOTE: Disconnect both ends of the power cord when not in use. Use only the supplied AC adapter with the specifications above.



### TURNING YOUR CLOCK ON

1. Plug the DC jack into the DC socket in the back, the device will be in standby mode, press the POWER button to turn the device ON.
2. When the device is in standby mode, the LED will blink. Press and hold the TIME SET button to set the current time.
3. To turn the device back to standby mode, press the POWER button again.



### USB CHARGING PORT

This device includes a USB port. The USB port supports powering and charging most devices including iPhone, iPad, iPod, Android devices, e-readers, digital cameras and more (USB cables sold separately).

The USB port supplies 5V/1A charging (see location of controls).



### SETTING THE TIME

1. Plug in the unit, press and hold the Time Set button for 2 seconds, the display will flash.
2. To set the time with HR for hours
3. To set the time with MIN for minutes
4. To press TIME set again for confirmation

NOTE: If during the adjustment time no key is activated for 10 seconds, the current display will be automatically stored.  
Only can set the time in standby mode.



### ADJUSTING THE BRIGHTNESS

There are three (3) levels of display brightness. Repeatedly press the Snooze/Dimmer button to select the desired setting.