

An OXfOrDTEC product. Manufacturer: VOXMICRO LTD, 8F.-3, No.5, Aly. 22, Ln. 513, Rueiguang Rd., Neihu Dist., Taipei City 114, Taiwan

High sensitivity dual band 2.4/5GHz rubber duck antenna - compact design - with RP-SMA (reverse polarity male) Part #: WAND5DBI-SMA

Model	WAND-5DBI	
Freq. Range	2400-2483.5MHz	5150-5850MHz
Bandwidth	83.5MHz	700MHz
Gain	3dBi	5dBi
V.S.W.R	<2	
Max Power	5 W	
Polarization	Vertical	
Impedance	50 Ω	
Connector	RP-SMA male	
Dimension	152x11mm	
Weight	150g	
Radome Material	ABS	

MECHANICAL SPECIFICATION


- Antenna Cover: PU
- Color: Black
- Operation Temperature: -20 ~ +60 degree
- Storage Temperature: -30 ~ +75 degree

The WAND-5DBI-SMA is the perfect replacement for standard stock antennae of a wireless devices when better signal to noise ratio is needed, combining compact size and great aesthetics. Stock antennae are only rated at 1-2dbi where the WAND series highly perform on both 2.4GHz and the full 5GHz bands. Will perfectly fit AP/Router devices, Media Players, Home Theater, Internet Appliance, MiniPCs etc.



- SOURCING ADVISORY
- SCHEDULED DELIVERIES
- PROACTIVE SUPPLY CHAIN

High sensitivity dual band 2.4/5GHz rubber duck antenna -
 compact design - with RP-SMA (reverse polarity male)
Part #: WAND5DBI-SMA

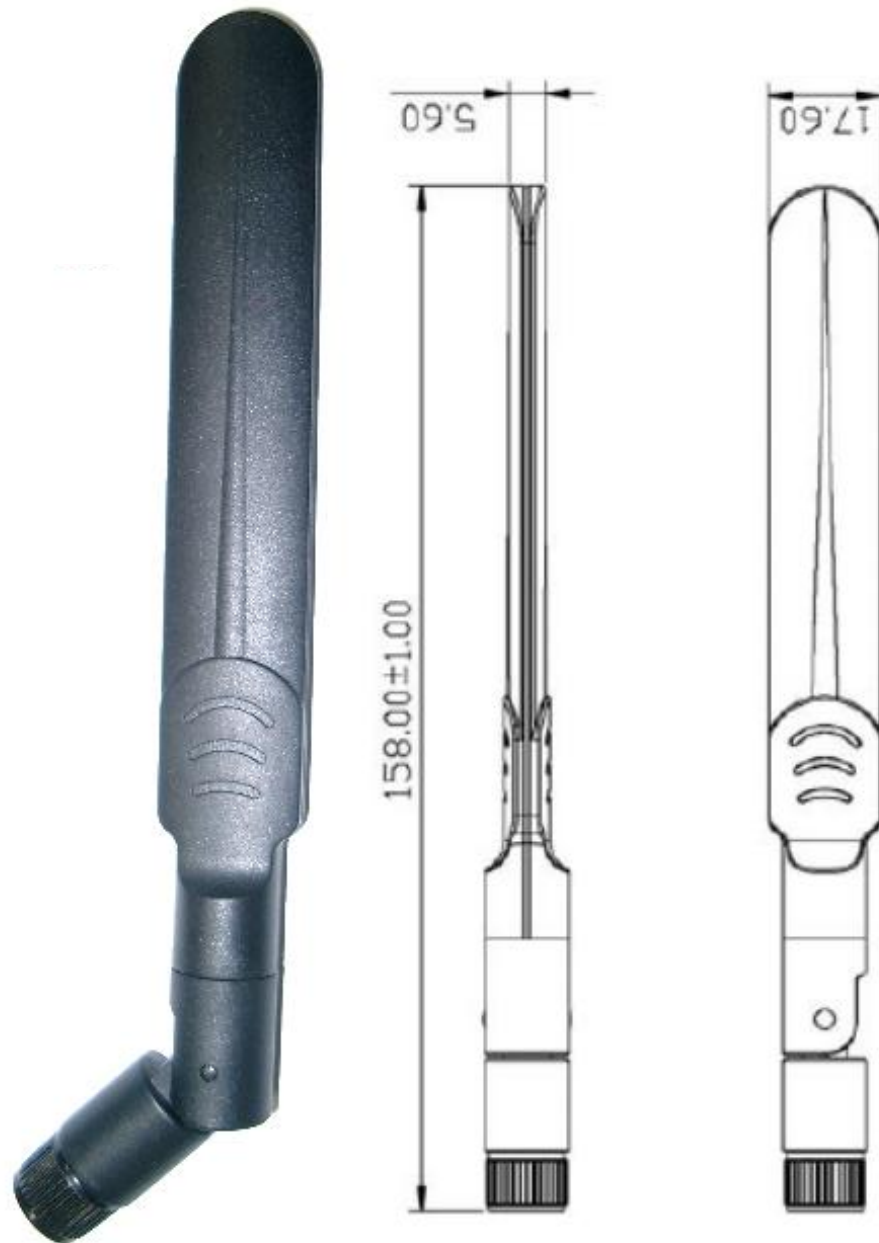


*real size representation in mm


FOR FURTHER INFORMATION, CUSTOMIZATION AND VOLUME PRICING CONTACT OXFORDTEC WHOLESALERS
 U.S.A./CANADA 877 411-WIFI OR +1 (562) 252-1420 - U.K. +44 1844 222001
 OR EMAIL SALES AT OXFORDTEC.COM

2400MHz


Total

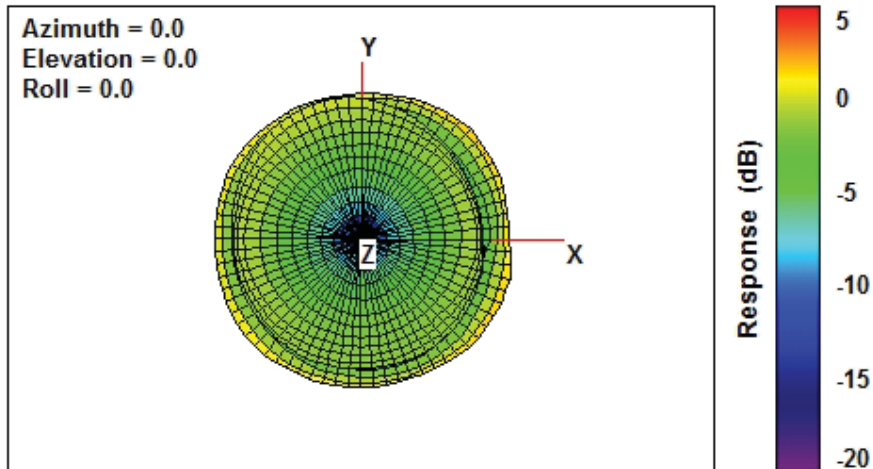

Total

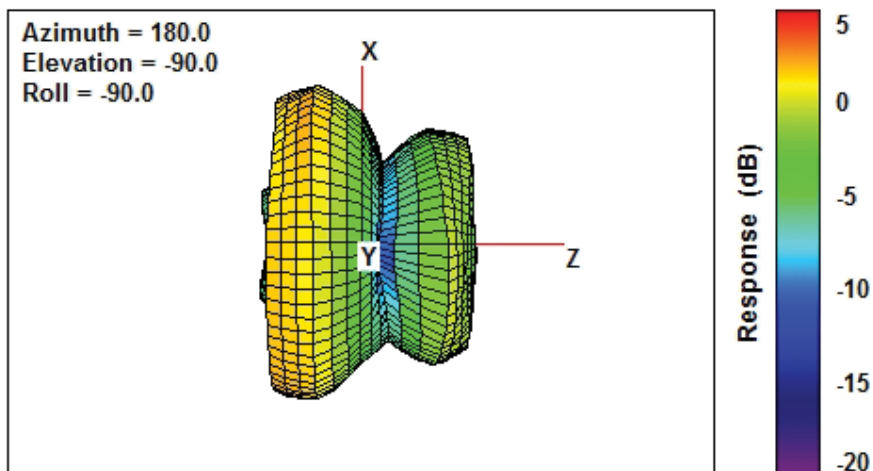


Total

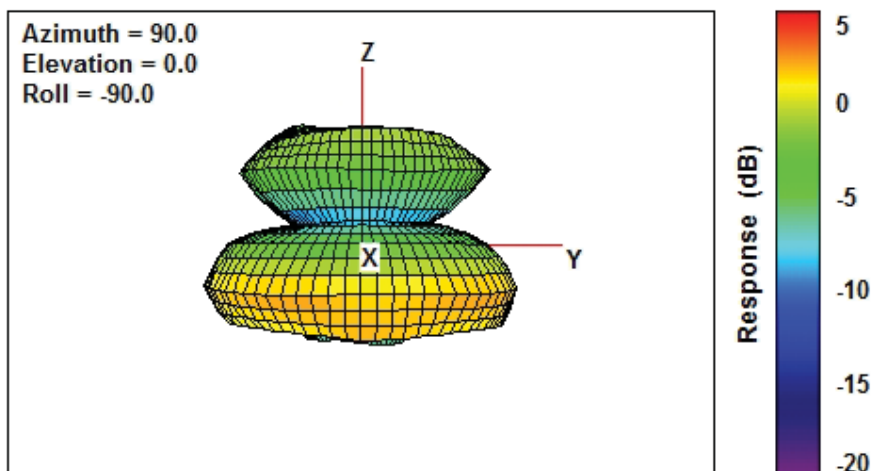


2450MHz


Total

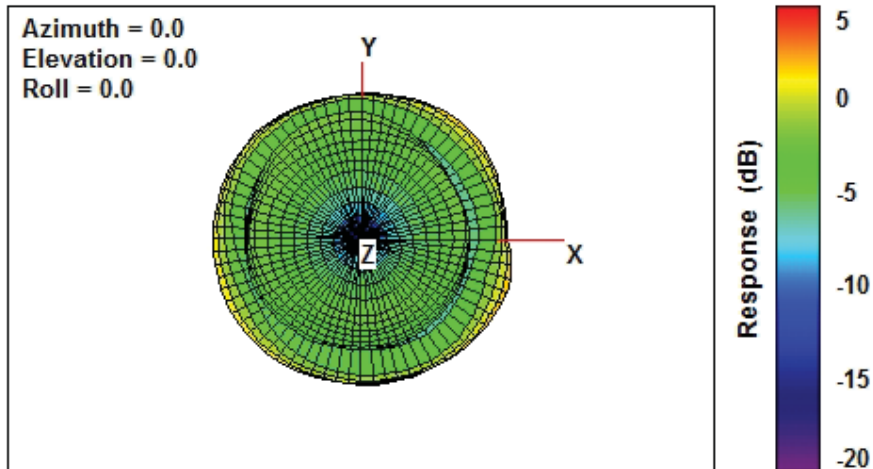

Total

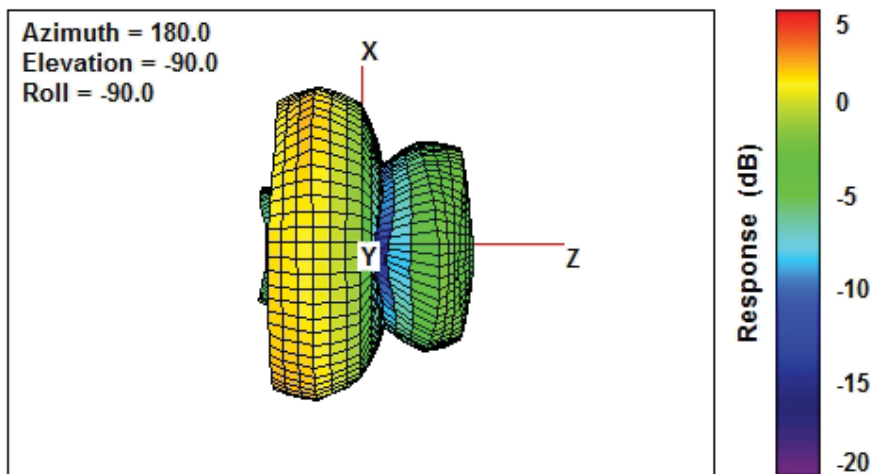


Total

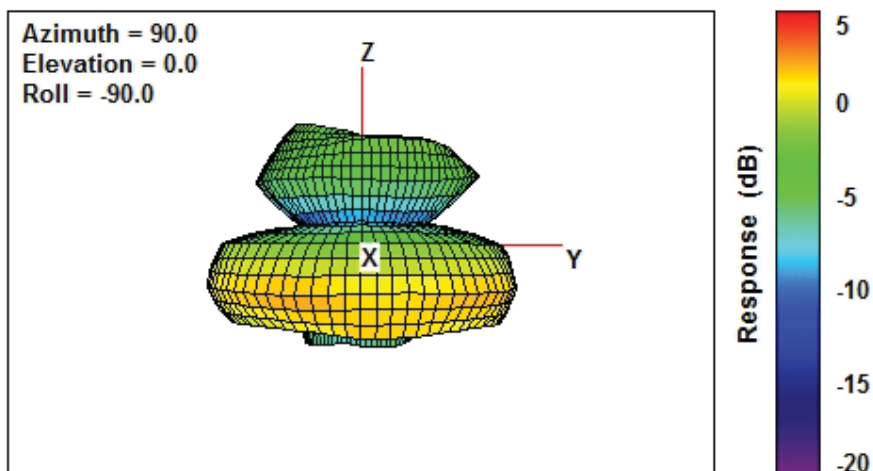


2500MHz


Total

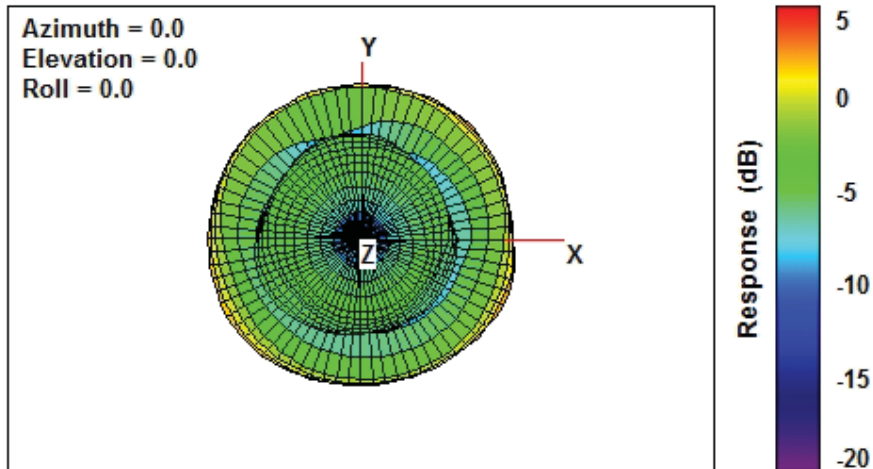

Total

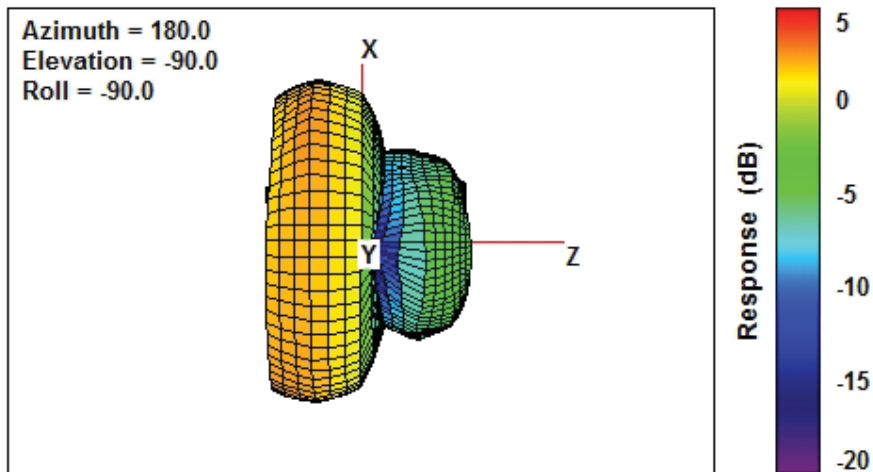


Total

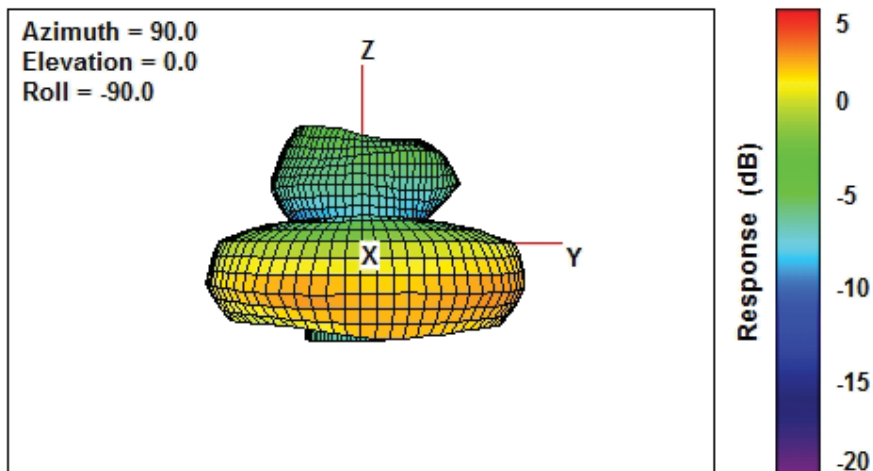


5150MHz


Total

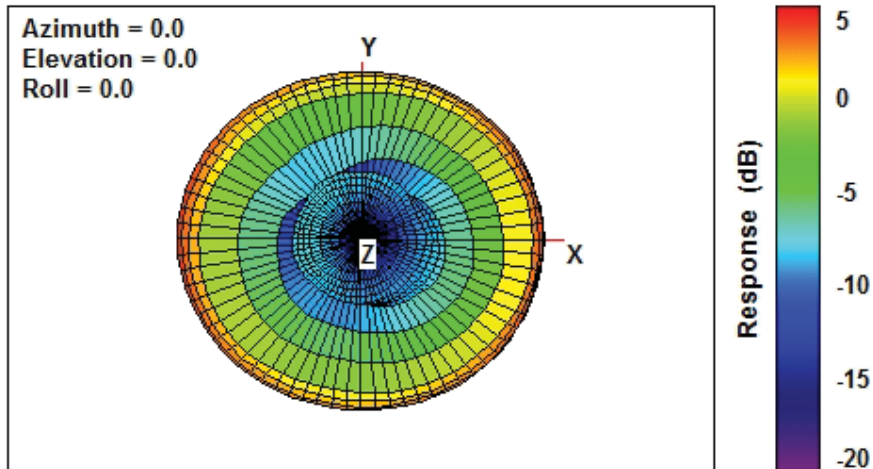

Total

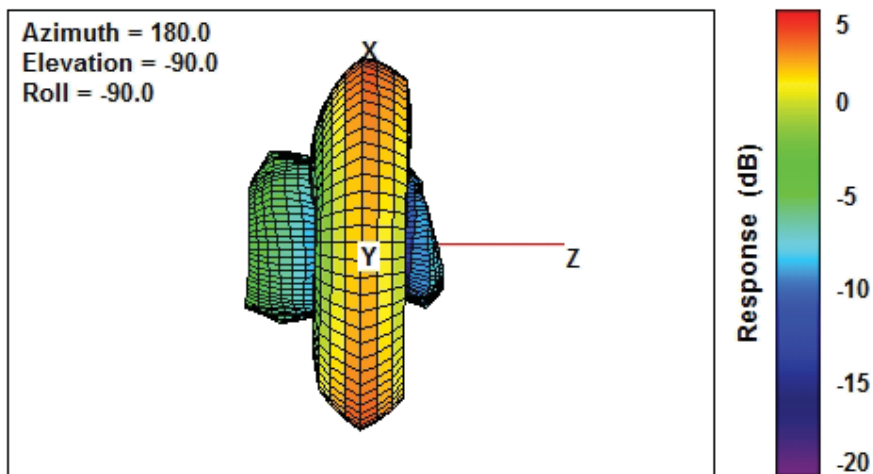


Total

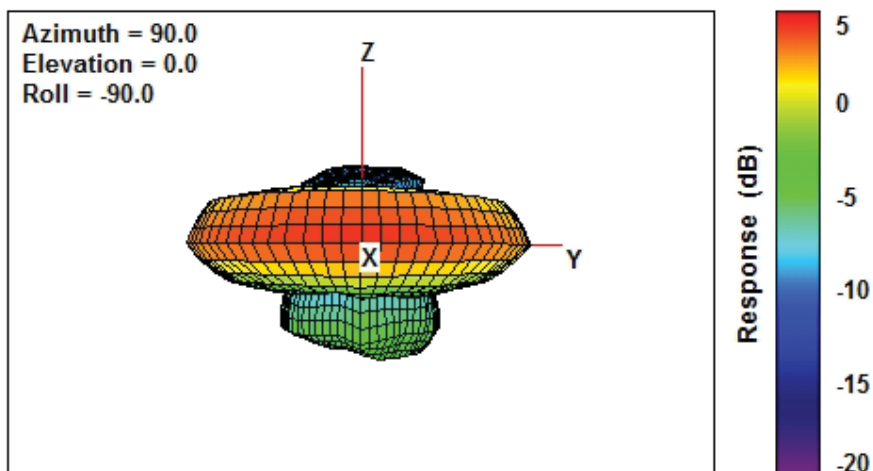


5375MHz


Total

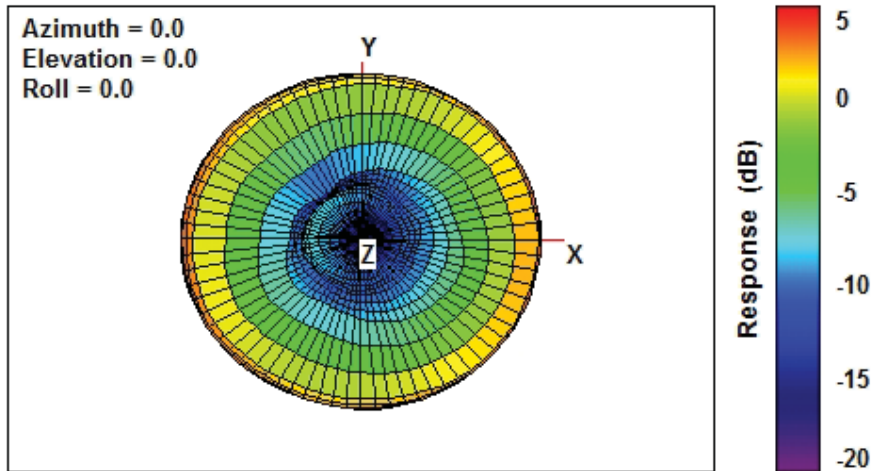

Total

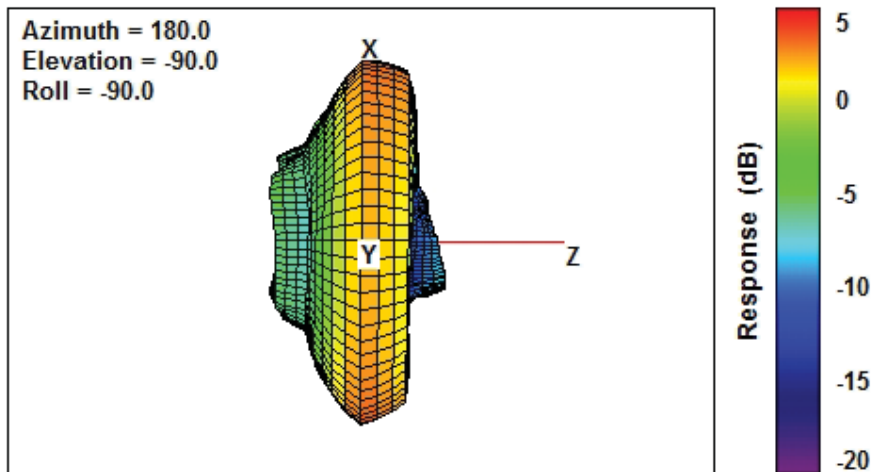


Total

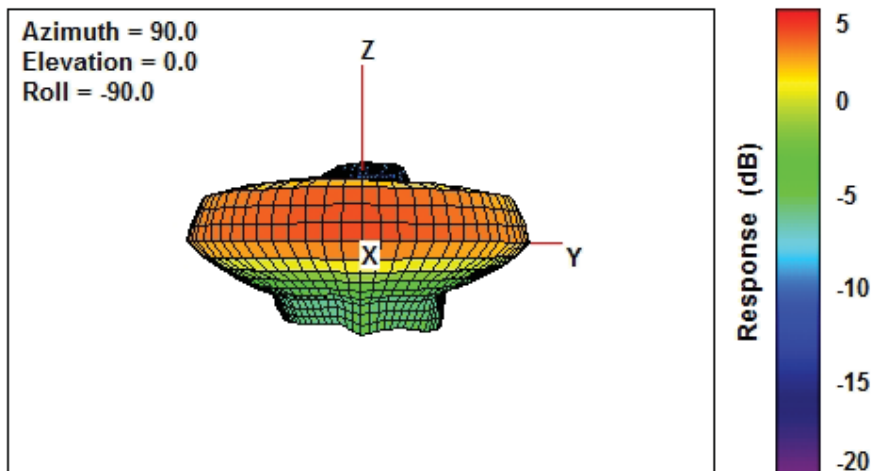


5750MHz


Total

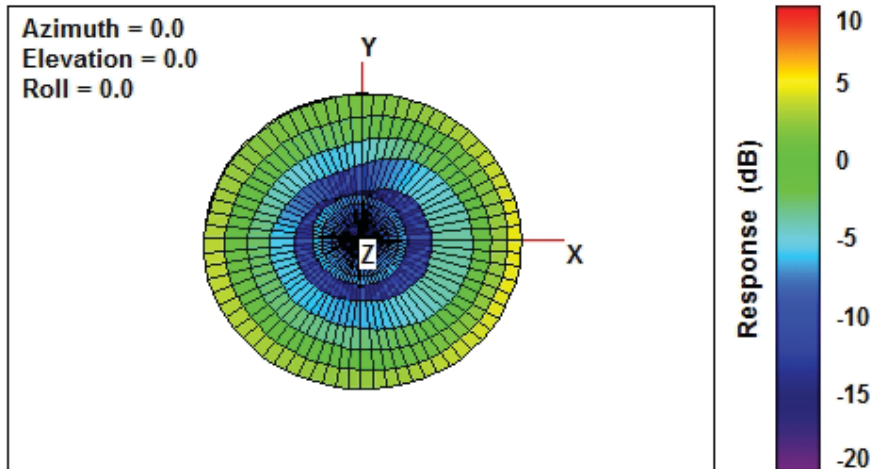

Total

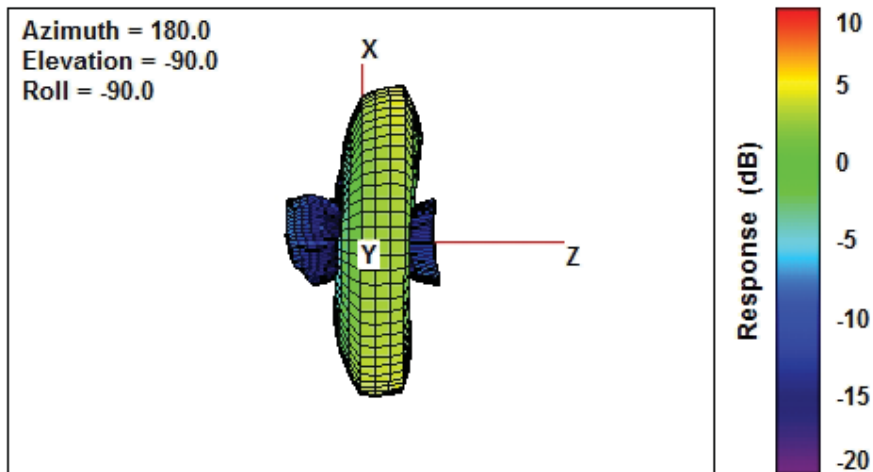


Total

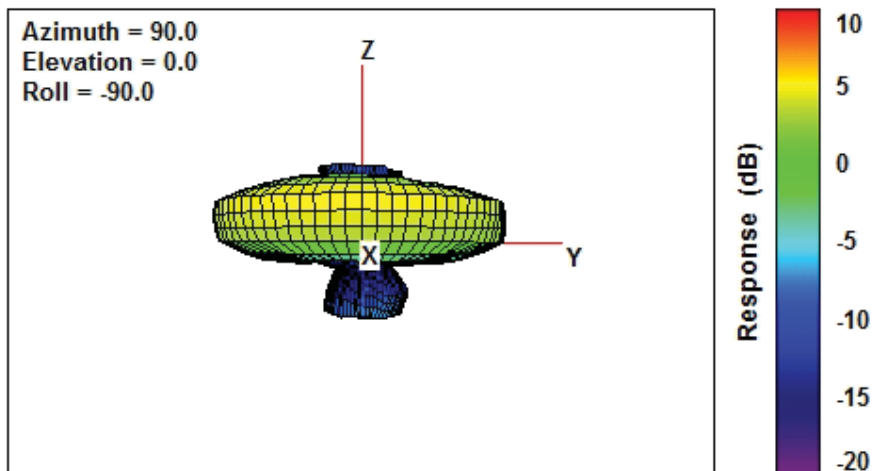


5850MHz

Total

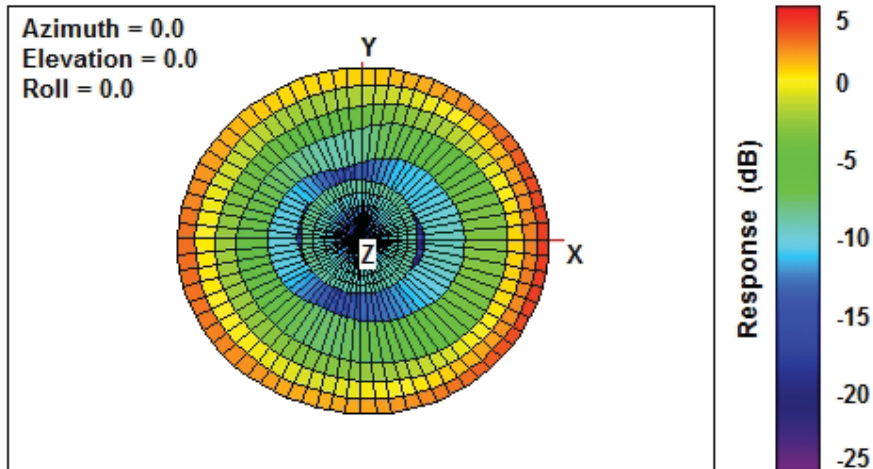

Total

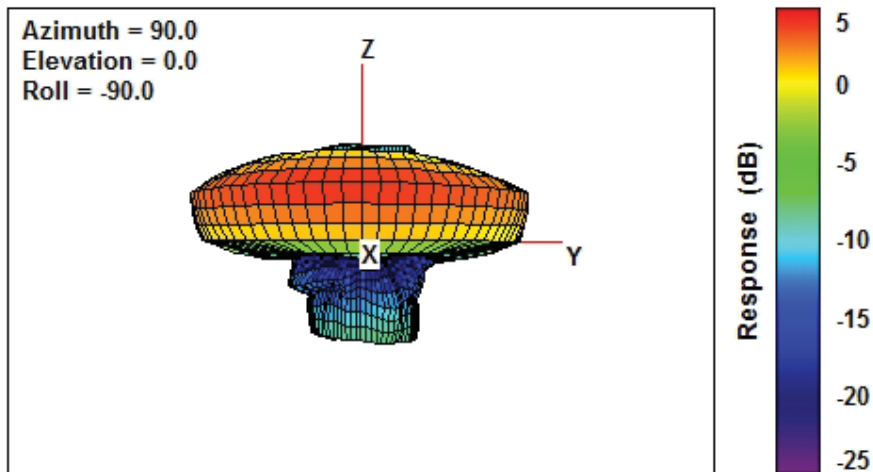

Total

