


磁悬浮蓝牙音箱

使用说明书

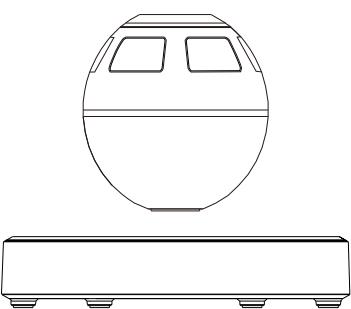

尊敬的用户，非常感谢您购买我公司的磁悬浮蓝牙音箱，在使用之前，请您务必仔细阅读本说明书，依照正确的指示操作使用，谢谢您的配合。

5.5该产品仅限室内使用，不防水，在使用过程中严防水滴或水溅。

5.6长时间不使用本产品，请拔掉电源。

5.7本产品内置聚合物电池，不要放置于过热的环境中。

5.8如有损坏，请联系我们。

6.售后服务

6.1.凡购买本产品起一年内，免费保修

6.2.在保修期内，以下情况将不执行保修：

- 因人为因素而造成的损坏
- 因操作不当而造成的故障或损坏
- 因对产品改造，分解，组装而发生的故障或损坏
- 如果您对本产品有任何的售后问题，请联系我们的经销商。


保修信息

客户名称: _____

购买日期: _____

维修记录: _____

1.功能说明

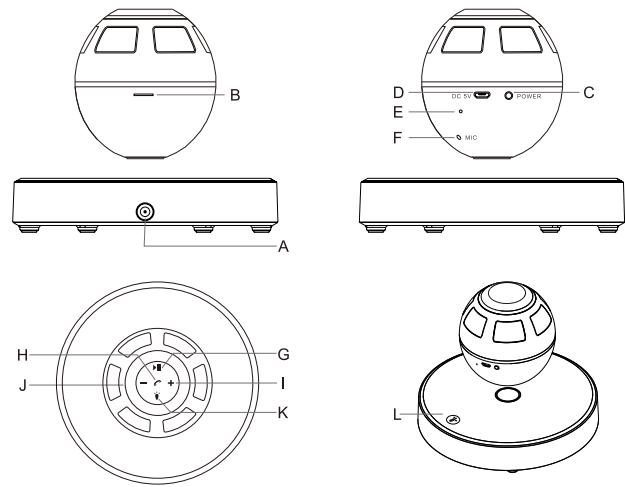

A: 底座适配器接口 B: TF卡接口 C: 音箱开关键 D: 音箱充电USB接口
E: 充电显示灯 F: MIC G: 播放/暂停键 H: 通话键(连按两次)
I: 长按音量增加/短按下一曲 J: 长按音量减小/短按上一曲
K: LED灯控制键 L: 底座灯触摸开关

2.主要参数

产品名称：磁悬浮音响
蓝牙版本：4.1
喇叭功率：5W
频率：40HZ~20KHZ
性噪比：≥85db
底座输入电压：15V 1A

蓝牙配对名称：SC-26
蓝牙接收距离：10米
电池：聚合物电池1000mAh
失真：3%
音箱充电电压：5V 0.5A


3.包装清单：

磁悬浮底座，音箱，电源适配器，说明书，USB充电线

4.使用及操作说明

4.1 使用环境：适合在水平的台面，附近不能有磁性或导磁性物体以及产生高频的物体

4.2 接入电源：将电源适配器AC端插入市电插座（100~240V），另一端插入磁悬浮底座的电源接口，LED灯点亮，说明已经接通电源（如图A）



4.3 放置音箱：用双手按图示姿势捧起音箱，磁铁部份朝下，将音箱自底座正中央正方慢慢放下。当音箱下降到接近悬浮位置时，会感觉到来自底座对音箱的磁斥力，此时双手不要太用力，让磁场的作用力至中心点，双手可作小范围的移动校正。当音箱接近至正中心点时，慢慢松开双手，音箱就能悬浮在底座上方了。（如图B）为了不使底座内部磁铁发烫，连续5次都不能将音箱浮于底座之上，请拔掉电源适配器，冷却30分钟后再尝试。



4.4 连接蓝牙：按音箱电源键“POWER”2秒后，会听到开机提示音启动音箱。
打开手机→设置→蓝牙→打开手机里面蓝牙开关→手机自动进入搜索模式
→已配对的设备：SC-26→播放音乐。

4.5 调节LED灯：因为底座的LED灯与音箱的LED灯没有自动调整同色的功能，请手动调整您需要的颜色。音箱短按 ⌂ 开灯或关灯，长按 ⌂ 改变灯的颜色。
底座短按 ⌂ 开灯或关灯，长按 ⌂ 固定灯的颜色。

4.6 如果需要播放手机TF卡里面的音乐，请将TF卡从手机里取出，插入音箱TF卡口，音箱自动识别TF卡里面的音乐自动播放，如果用蓝牙播放，请将TF卡从音箱里取出。

4.7 为了不使底座断电后，音箱直接掉下而导致外表受到损坏，请将音箱从底座上拿走后然后再拔掉电源适配器。

5.注意事项

5.1当音箱连续尝试几次未能悬浮成功，应暂停放置，以免底座系统过热。系统过热后，温度保护器会自动开启断电，实施保护。


5.2断电后应将音响与底座分开放置（距离30公分以上）

5.3由于磁悬浮产品带有永久磁铁，因此底座及地球仪应离电子类产品，比如手机，电脑等80公分远。

5.4此产品为带磁性非玩具类产品，不适合儿童及孕妇长时间使用。

LEVITATING BLUETOOTH SPEAKER

USER MANUAL

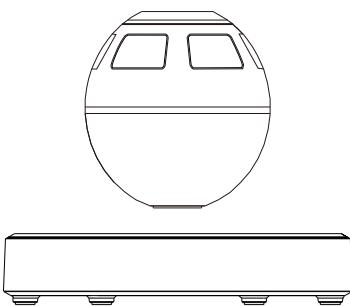

Dear customers, thank you for your purchase of our company's magnetic levitating bluetooth speaker, please be sure to carefully read this manual before using, follow the correct instructions to use this product, thank you for your cooperation.

5. Note:

5.1 When the speaker tried several times failed to suspend above base, should stop to avoid the base system overheating. If system overheating, the temperature protection device will automatically turn off the power to implement protection.

5.2 After turn off power, speaker and base should be placed separately (distance shall be at least 30 cm or more)

5.3 As the magnetic levitating products have permanent magnets, so the base and speaker orb should be at least 80cm away from electronic products, such as mobile phones, computers and so on.

5.4 This product is a magnetic instead of toy products, not suitable for children and pregnant women for long time playing.

5.5 This product is for indoor use only and not waterproof, shall avoid water droplets or water splashing .

5.6 If you do not use this product for a long time, please remove the power supply.

5.7 This product has built-in polymer battery and should not be placed in overheated environment.

5.8 If damaged, please contact us and professional maintenance personnel.


6. After-sales service

6.1. We guarantee 1 year warranty of this product to repair from customer purchase time.

6.2. During the warranty period, the following conditions will not be subject to warranty:

- Damage caused by human factors
- Malfunction or damage caused by improper operation
- Malfunction or damage caused by man-made transformation, decomposition and assembly
- If you have any after-sale issues with this product, please contact our dealer.

1. Functional description

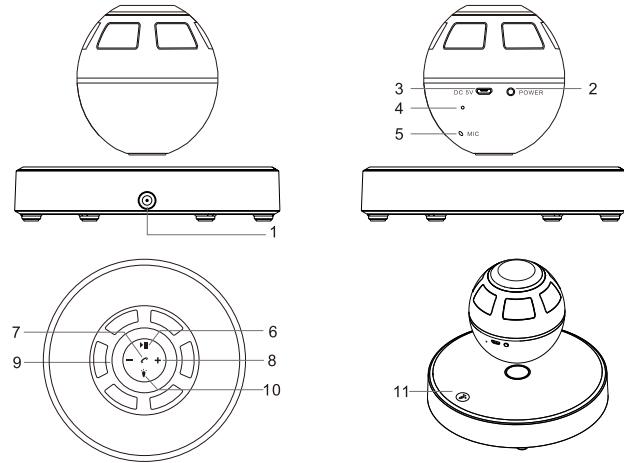

1:Base adapter interface 2:ON/OFF 3:Charging USB interface
4:Charging LED indicator light 5:MIC 6:Play/pause 7:Microphone
8:Long press increase the volume/short press switch to next song
9:Long press down the volume/short press switch to previous song
10:LED lights control key
11:Base LED light touch switch

2. Main parameter

Product Name: magnetic levitating bluetooth speaker
Bluetooth pairing name: SC-26
Wireless range: 10 meters
Battery: Polymer battery 1000mAh
Distortion:3%
Speaker orb charging voltage: 5V 0.5A
Base input voltage: 12V 2A

Bluetooth version: BK4.1
Output power: 5W
Frequency range:40HZ~20KHZ
SNR:S/N≥85db


3. Package:

magnetic levitating base, speaker, power adapter, manual, USB charging cable.


4. Operating instructions

4.1 Operating environment: suitable for horizontal desktop, any magnetic or magnetic objects or even objects which can generate high frequency near the speaker shall not be allowed.

4.2 Access Power: Plug the AC end of the power adapter into the electricity socket (100~240V) and the other end into the power interface of the magnetic levitating base. When the LED lights up, indicating that the power is turned on.



4.3 Place the speaker: with both hands holding the speaker orb as the posture shown in picture, the speaker bottom center with magnet part is put down slowly, which shall point to base center. When the speaker orb down close to the suspension position, hands will feel magnetic repulsion from the speaker base , at this time shall not force the hands to put speaker on, please wait the speaker magnetic field force exactly point to the base center, hands can make a small range of mobile correction with speaker orb. When the speaker very close to the base center , slowly release the hands, the speaker can be suspended on the top of the base. (As shown) In order not to make the base internal magnet hot, after 5 times if the speaker can not float above the base, please remove the power adapter, cooling base and then try again.



4.4 Connecting Bluetooth: Press the speaker power key "POWER" for 2 seconds to hear the start tone. Open the phone → Settings → Bluetooth → Open the phone bluetooth key → phone automatically enter the search mode → Paired equipment: SC-26 → play music.

4.5 Adjusting the LED light: Because the LED light of the base and the LED of the speaker do not automatically adjust to be the same color, please manually adjust the color you need. The speaker light color and mode changes by short press. Base light color changes through the base touch button, short press to turn on/off lights, long press to fix light color.

4.6 In order not lead to damage of the speaker appearance if the base power off then the speaker dropped directly and smashed , please remove the speaker from the base and then turn off the power

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.