



Sharetronic Data Technology Co., Ltd

CE2200

封底

材质：128g 双铜+双面哑油  
工艺：骑马钉

成品尺寸：148x95mm


THANK YOU FOR YOUR TRUST

Product User's Manual  
产品使用手册

封面

## Overview

### 1.1 Basic function

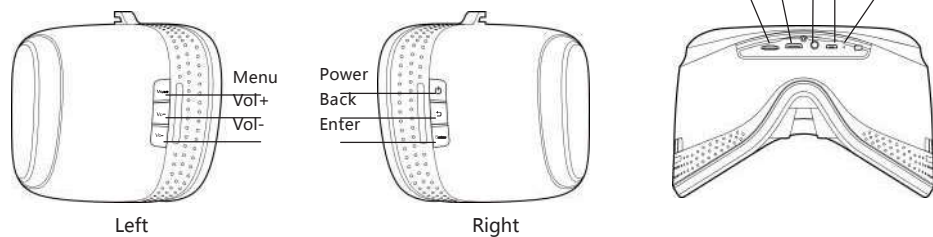

Power button : Long press(5 seconds) : Boot/Shutdown ; Short press : Sleep/wake-up

Back Button : Back to the previous menu


Enter Button : Enter the options

Volume Button : Adjust the volume

Menu Button : Pop-up menu. MENU contains helmet mouse/bright adjustment/VR mode switch/shortcut operation for Application closure

Reset Button : Restart the device

### 1.2 Remote control

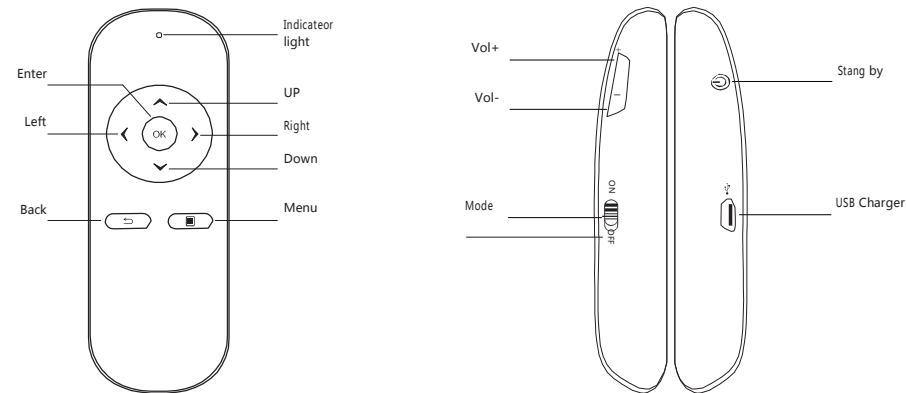

First time device search : press the power button first, then start to press OK button till the indicator flickers ; The indicator will stop flickering when pairing succeeds. The paired remote control unit will automatically connect to the all-in-one device in next starting up.

Note : when the bluetooth remote control failed to connect to all-in-one device, please choose the helmet mouse by pressing MENU button on the device. Enter "Setting" via helmet mouse to activate bluetooth scan function to search the signal of the remote control and connect it to all-in-one device again. The indicator will flicker when the remote control is in low power state. Please charge by USB cable.

### ➤ 1.3 Insert/take out TF card

Insert TF card : Insert TF card into the TF slot; cracking sound will be heard when you complete this step.

Take out TF card : Press down TF card, the TF card will pop out when you hear the cracking sound, then take it out.

Warning : please insert and take out the TF card when the device is in shutdown state, or it may lead to system default.

### 1.4 Lens Renewal

- Either anticlockwisely rotate (left lens) or clockwisely rotate (right lens) till it out of ring groove, then take out the lens. Select appropriate lens and put it into the ring groove, then clockwisely rotate (left lens) or anticlockwisely rotate (right lens) to fix it.

### 1.5 Packing Accessories

- Bluetooth Remote Control \*1
- USB2.0 Cable \*1
- HDMI HD line \*1
- Adapter \*1
- Earphone \*1
- User's Manual \*1
- Warrantee Card \*1

## 2 Quick Start Guide

### 2.1 TIPS

- In order to avoid unnecessary damage, please note the following information before using our all-in-one device :

- Do not turn on the device in the place where wireless device is forbidden, like aircraft, nearby place of medical locations or facilities
- where shows the ban mark for electronic products
- Don't turn on the device in the place where arouse distraction and risk, such as gas station, fuel or chemical products spots or its nearby place.
- Do use the original accessories and battery. Note: Replace the battery with wrong type will increase the hazard of explosion.
- Please keep the device dry.
- Please find the professional serviceman to maintain the device.
- Please refer to the manual to connect other device. Do not connect to the unmatched device in casual.
- The battery shall not exposed to sunshine, fire, or overheated environment.
- 

### 2.2 Battery charge

Please use the equipped charger to connect the device to power outlet or use the USB cable to connect the device to computer.

- The indicator of the device will flicker when charging ; and the indicator will in solid state when charged.
- The shutdown device will wake up when plug in the power charge.
- Please short press the power button to keep the device in sleep mode when not using the device.
- 

### 2.3 Connection to PC

Please connect the device to PC via USB cable. Part of the program in SD card will not be available when saving data.



#### ➤ 2.4 Headphones Usage

Please insert 3.5mm standard headphone into 3.5mm slot. You will hear the sound when you plug it into the device.

Increase volume : volume+ button

Reduce volume : volume- button

#### 2.5 HDMI IN HD input

- Please click the display function when using HDMI line to connect the device to PC or other device with HD video.

### 3 Main Content

#### ➤ 3.1 Main Interface

Main interface consists of Setting, Media player, APP store, HDMI In input and All Applications. Wear the VR device on your head, then press direction key of the remote control to enter the options. State of the bluetooth, wireless network, power, and time will be showed on the interface.

#### 3.2 Setting

- Setting options include five parts: wireless network, bluetooth, general, system, and peripherals device.

##### 3.2.1 wireless network

Scan the available network, and enter the password to connect it.

Disconnect and cancel the saved password of the selected wireless network if you don't want connect the device to it.

##### 3.2.2 Bluetooth

The device will automatically or artificially search bluetooth devices when bluetooth is on. The list will show the searched name of the bluetooth device. Users could connect the one they need.

Note: When the VR device cannot connect to the paired bluetooth device, cancel the bonded device and try to scan and reconnect the device.

Warnings :

1. Labelling requirements : This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2. Information to user : Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. Information to the user: Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

4. RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

FCC warnings: The user shall be cautioned that changes /modifications not approved by the responsible party could void the user's authority to operate the equipment.



### 3.2.3 General

The following operations can be available in General option :

Screen brightness and volume adjustment, language selection, theme selection, sleep time setting, Timezone set.

### 3.2.4 System

System option contains three parts: System update, Factory reset, About device.

System update : Two methods for update

1. Online update, you could download the system when new version is in the store.

2. Users could download the firmware to the device, then update it manually.

Factory Reset : Please select this function carefully. All information saved in the device will be eliminated if choose this function.

About device : Users can browse the system version, Android version, CPU frequency, memory of the built-in storage and extra storage, screen resolution, core version.

### 3.2.5 Peripheral Device

Check and manage the peripheral device connected to all-in-one device, such as hang ring, game pad, watch and computer.

### 3.3 Media player

Media player consists of two parts: local video and online video.

The local video can be saved in the built-in storage or extra TF card. The player support video of MP4,MKV,AVI,MOV,RMVB and other common video formats.

Selecting video : Use the paired remote control to select videos.

Playing video : Press the Enter button on the device or remote control to play videos.

Pause/playback : Re-press the Enter button

Quit playing : press the back button, then select back option. Selecting the Application closure option by pressing Menu button to exit. Fast forward/reverse : press the remote control's right button to fast forward and press the left one to reverse.

Online videos playing requires wireless network connection

Note : If the video on the All-in-one device is on the dual-screen format, then press the BACK button of remote control unit to choose Single/Dual-screen switch to enjoy full-screen video .



### 3.4 APP Store

Users could download and install common applications from APP Store.

Note : Please download the applications and games from our APP Store. Downloading from other informal channels may cause damage of the the device.

### 3.5 HDMI In input

HDMI In input aims to transmit the HD video signal into the all-in-one device. HD signal can be obtained from PC, OTT BOX, and other device with HD signal output. Before choosing HDMI In input function, please connect all-in-one device to device with signal output via HDMI cable.

Note: Switch Projection mode of the PC display to Copy mode, when video works fine on PC while blank screen showed on all-in-one device during the connection between PC and all-in-one device.

### 3.6 All APPLICATIONS

All your installed games and applications will be listed in All APPLICATIONS. User could manage all the installed APPs in All APPLICATIONS, including control of the content both in built-in storage and extra TF card.