

BUBBA®


INSTRUCTION MANUAL

SMART FISH SCALE *Life*

Instructions 1223085 Ver.004
PRODUCT #1219214


BATTERIES AND START-UP

1. To open the battery door, grasp the tab above the BUBBA logo and pull away from handle.
2. Remove the battery tray and insert the three AAA batteries into tray accordingly.
3. Reinsert the battery tray into the handle in the orientation shown.
4. Reinstall the battery door making sure it is firmly seated
5. Press and hold the CENTER HOOK button for 2 seconds to power on. Press and hold for 2 seconds to power off.

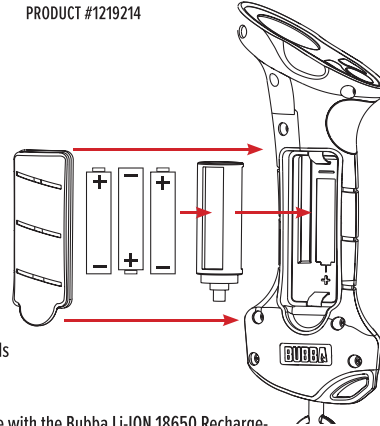

NOTE: OPTIONAL, the Smart Fish Scale Lite is compatible with the Bubba Li-ION 18650 Rechargeable battery. Make sure to fully charge that battery before insertion. Remove the AAA battery holder and insert the rechargeable battery directly in to the Handle in the same orientation.

BUTTON/SCREEN OVERVIEW

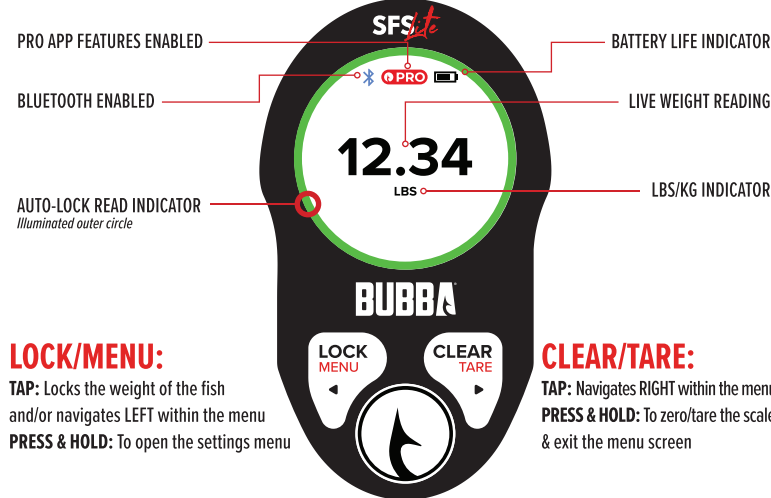

LOCK/MENU:

TAP: Locks the weight of the fish and/or navigates LEFT within the menu
PRESS & HOLD: To open the settings menu

CLEAR/TARE:


TAP: Navigates RIGHT within the menu
PRESS & HOLD: To zero/tare the scale & exit the menu screen

CENTER HOOK:

TAP: Functions as a select button when navigating menus/screens
PRESS & HOLD: To power the unit on and off

WEIGHING A FISH

1. Before attaching the fish, hold the scale vertically with hook or lip clip hanging freely. Press and hold the CLEAR/TARE button to zero the weight.
2. Attach your fish to the hook or lip clip, suspend and wait for the weight reading to appear stable, then press the LOCK/MENU button.



SETTINGS

- MODE:** Weigh (Default). *Tournament, Rally, and Competition mode unlocked with PRO app subscription.*
- SLEEP TIME:** Set time the scale waits for user input before shutting down.
- BAG:** Set the bag limit of 2-8 fish for Tournament mode.
- AUTO-LOCK:** Toggle the Auto-Lock ON/OFF.
- UNITS:** Set the weight units displayed LB/oz or Kg/gr.
- DEVICE INFO:** View firmware information.
- CLEAR MEMORY:** Clear saved weights.
- FACTORY RESET:** Resets all settings and erases all weights.

AMERICAN OUTDOOR BRANDS™
1800 N. Route Z,
Columbia, MO 65202
www.aob.com




©2025 AOB PRODUCTS COMPANY

UNLOCK THE FULL *Potential* BUBBA PRO App subscription features

COMPETITION MODE

Competition Mode allows up to four anglers to log their catches on one Smart Fish Scale Lite. Each bag retains the total number of fish and the total weight of those fish. During competition mode, the Smart Fish Scale Lite displays the heaviest bag weight leader within the group.

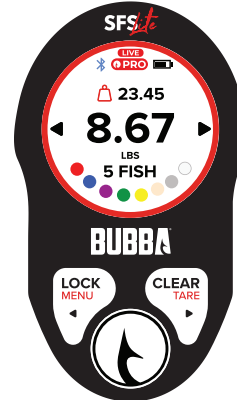

TOURNAMENT MODE

Tournament Mode manages up to 8 fish by (colored) cull ball and individual weight. When a new fish is weighed, the Smart Culling System will automatically highlight the **SMALLEST** fish in the bag so it can be easily replaced with a heavier fish. Using the Bubba Pro App you can host your own fishing tournaments.




RALLY MODE

Rally Mode will store your total weight and total fish count as well as display your largest fish.



SCAN THE QR CODE to see the full capabilities of the Smart Fish Scale Lite with our mobile app!

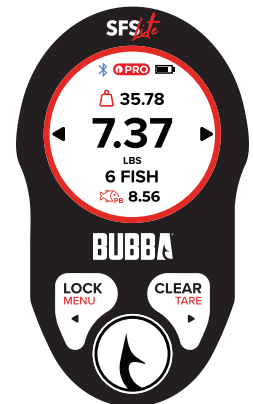

WARRANTY

THIS BUBBA® PRODUCT IS WARRANTED TO BE FREE FROM DEFECTS IN MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF MANUFACTURE OR, UPON PRESENTMENT OF A DATED SALES RECEIPT, FROM THE DATE OF ORIGINAL RETAIL PURCHASE.
For complete warranty terms and conditions, please visit: www.bubba.com/warranty
For warranty service call Customer Service at:
1-844-486-7265 or visit www.bubba.com for a Return Authorization Number (RMA).

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Industry Canada technical specifications.
Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux normes CNR exemptes de licence d'Innovation, Sciences et Développement économique Canada. Son fonctionnement est assujéti aux deux conditions suivantes :
(1) Cet appareil ne doit pas causer d'interférences.
(2) Cet appareil doit accepter toute interférence, y compris celles qui peuvent entraîner un fonctionnement indésirable de l'appareil.

BUBBA®


BALANCE À POISSONS INTELLIGENTE

GUIDE D'INSTRUCTIONS


INSTALLATION DES PILES ET DÉMARRAGE

1. Pour ouvrir le couvercle du compartiment à piles, saisissez la languette au-dessus du logo BUBBA et tirez-la à l'écart de la poignée.
2. Retirez le compartiment à piles et insérez les trois piles AAA dans le compartiment comme indiqué.
3. Remplacez le compartiment à piles dans la poignée dans le sens indiqué.
4. Remplacez le couvercle du compartiment à piles en vous assurant qu'il est bien placé.
5. Maintenez enfoncé le bouton CROCHET CENTRAL pendant 2 secondes pour allumer l'appareil. Maintenez enfoncé pendant 2 secondes pour éteindre l'appareil.

REMARQUE : EN OPTION, la balance à poissons intelligente Lite est compatible avec le bloc-piles rechargeable Bubba Li-ION 18650. Veuillez à charger complètement le bloc-piles avant de l'insérer. Retirez le support de piles AAA et insérez le bloc-piles rechargeable directement dans la poignée dans le même sens.

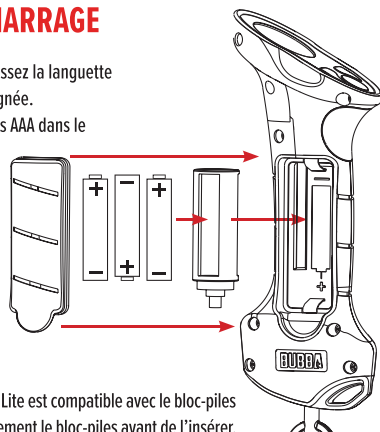

PRÉSENTATION GÉNÉRALE DES BOUTONS/ÉCRAN

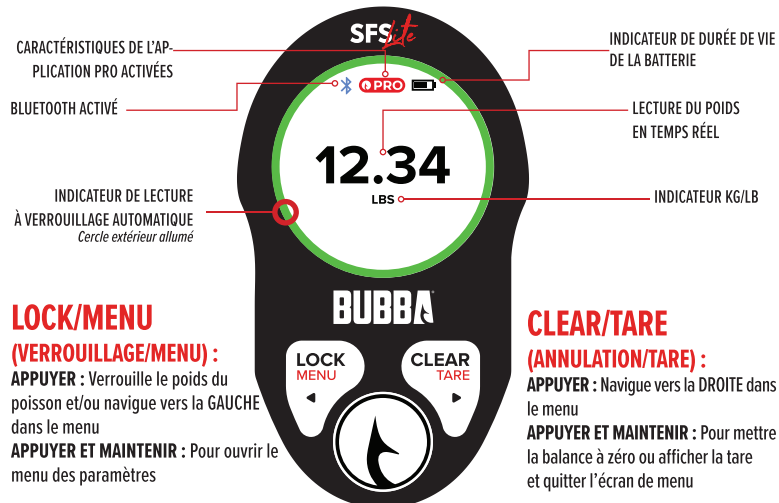

LOCK/MENU

(VERROUILLAGE/MENU) :

APPUYER : Verrouille le poids du poisson et/ou navigue vers la GAUCHE dans le menu

APPUYER ET MAINTENIR : Pour ouvrir le menu des paramètres

CLEAR/TARE

(ANNULATION/TARE) :

APPUYER : Navigue vers la DROITE dans le menu

APPUYER ET MAINTENIR : Pour mettre la balance à zéro ou afficher la tare et quitter l'écran de menu

CROCHET CENTRAL :

APPUYER : Fonctionne comme un bouton de sélection lors de la navigation dans les menus/écrans

APPUYER ET MAINTENIR : Pour allumer et éteindre l'unité

WEIGHING A FISH (PESER UN POISSON)

1. Avant d'attacher le poisson, tenez la balance à la verticale, avec le crochet ou la pince à lèvres qui pend librement. Appuyez et maintenez le bouton CLEAR/TARE (ANNULATION/TARE) pour mettre le poids à zéro.
2. Attachez votre poisson à l'hameçon ou à la pince à lèvres, suspendez-le et attendez que le poids semble stable, puis appuyez sur le bouton LOCK/MENU (VERROUILLAGE/MENU).

REMARQUE : VERROUILLAGE AUTOMATIQUE Si vous utilisez la fonctionnalité de verrouillage automatique, la lecture du poids est automatiquement verrouillée une fois que la mesure est stable. La barre rouge autour du bord extérieur de l'écran deviendra verte. Une fois que la barre verte forme un cercle complet, le poids sera verrouillé.

3. Une fois que le poids est verrouillé, enregistrez le poisson en appuyant sur le bouton CROCHET CENTRAL.
4. Pour effacer un poids verrouillé, maintenez le bouton CLEAR/TARE (ANNULATION/TARE) appuyé.

SETTINGS (PARAMÈTRES)

MODE : Poids (par défaut). Les modes Tournoi, Rallye et Compétition sont déverrouillés avec l'abonnement à l'application PRO.

SLEEP TIME (DURÉE DE VEILLE) : Déterminer la durée pendant laquelle la balance attend une intervention de l'utilisateur avant de s'éteindre.

BAG (SAC) : Régler la limite du sac à 2 - 8 poissons pour le mode tournoi.

AUTO-LOCK (VERROUILLAGE AUTOMATIQUE) : Basculer le verrouillage automatique entre MARCHE/ARRÊT.

UNITS (UNITÉS) : Déterminer l'affichage du poids en LB/oz ou kg/g.


DEVICE INFO (INFORMATIONS SUR L'APPAREIL) : Voir les informations du micrologiciel.

CLEAR MEMORY (EFFACER LA MÉMOIRE) :

Effacer les poids enregistrés.

FACTORY RESET (REINITIALISATION AUX PARAMÈTRES D'USINE) :

Reinitialiser tous les paramètres et effacer tous les poids.




LIBÉREZ LE POTENTIEL MAXIMAL

BUBBA PRO Caractéristiques de l'abonnement à l'application


MODE COMPÉTITION

Le mode Compétition permet à quatre pêcheurs au maximum d'enregistrer leurs prises sur la balance à poissons intelligente Lite. Chaque sac mémorise le nombre total de poissons et le poids total de ces poissons. En mode compétition, la balance à poissons intelligente Lite affiche le meneur en fonction du poids du sac le plus lourd parmi le groupe.

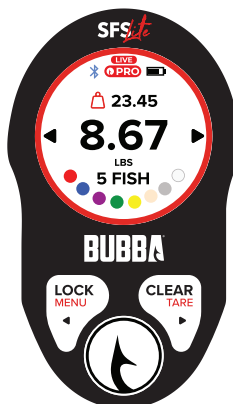

MODE TOURNOI

Le mode Tournoi gère jusqu'à 8 poissons par balle de tri (de couleur) et par poids individuel. Lorsque la balance intelligente pèse un nouveau poisson, le système de tri intelligent met automatiquement en évidence LE PLUS PETIT poisson du sac afin qu'il puisse être facilement remplacé par un poisson plus lourd. En utilisant l'application Bubba Pro, vous pouvez animer vos propres tournois de pêche.

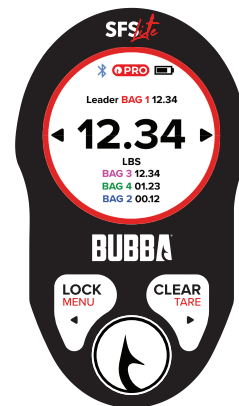

MODE RALLYE


Le mode Rallye enregistre le poids total et le nombre total de poissons et affiche votre plus gros poisson.



Download on the App Store

GET IT ON Google Play

SCANNEZ LE CODE QR pour découvrir toutes les capacités de la balance à poissons intelligente Lite avec notre application mobile!

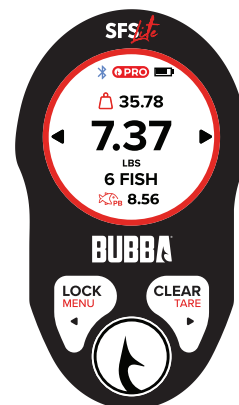

GARANTIE

CE PRODUIT BUBBA® EST GARANTI COMME ÉTANT EXEMPT DE DÉFAUTS DE MATÉRIAU ET DE FABRICATION PENDANT UNE PÉRIODE D'UN (1) AN À COMPTER DE LA DATE DE FABRICATION OU, SUR PRÉSENTATION D'UN REÇU DE CAISSE DATÉ, À COMPTER DE LA DATE D'ACHAT D'ORIGINE.

Pour consulter les modalités complètes de la garantie, veuillez visiter le site : www.bubba.com/warranty

Pour le service de garantie, communiquez avec le service à la clientèle au :

1 844 486-7265 ou visitez le site www.bubba.com pour obtenir un numéro d'autorisation de retour (NAR).

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Industry Canada technical specifications.

Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux normes CNR exemptes de licence d'Innovation, Sciences et Développement économique Canada. Son fonctionnement est assujéti aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toute interférence, y compris celles qui peuvent entraîner un fonctionnement indésirable de l'appareil.