

BT Usermanual/QSG copy deck

**Front Cover:**

Bluetooth cable Owner's Manual

**Section 1: Intro and product registration (no copy header)**

Congratulations on purchasing your new Bluetooth cable! Make sure to register your new cable and be the first one to know about new products, promotions, contests and accessories.

Register at: <https://www.westone.com/productregistration>

**Section 2: Cable Overview**



- MMCX Audio Connector
- Volume Up
- Power
- Volume Down
- USB Charging Port

- Cable Management Bolo

## Section 2: Connecting your Cable (Steal images from current UM)

1. To disconnect your MMCX cable from your monitor
  - a. Hold the monitor and the tip of the cable firmly with each hand pulling at a straight angle from the socket. 加图片说明。
    - i. DO NOT PULL FROM THE WIRE OR AT AN ANGLE!
2. To connect your Bluetooth cable
  - a. Identify which cable is the left and the right by the “L” and the “R” at the tip of the cable
  - b. Match the cable to the appropriate earphone
  - c. Insert the cable into the earphone by pushing directly into the socket

## Section 3: Pair your device




1. Hold down the power button for 5 seconds. The indicator light located next to the power button will begin flashing red and blue to indicate the pairing process has begun.
2. To activate Bluetooth® on your phone and set it to search for new devices follow the below steps for your phone.
  - a. iPhone: Go to Settings > General > Bluetooth > On\*
  - b. Android: Go to Settings > Bluetooth > On > Scan for devices\*
  - c. Windows: Go to Settings > Bluetooth > On\*

\*Pairing steps can vary by device.

3. Select “Westone BT”
  - a. If your phone asks for a passcode, enter four zeros (0000) for the passcode or accept the connection.
  - b. Once successfully paired, you will hear a single beep and the indicator light switches from flashing red and blue to just flashing blue.

## Section 4: Button Functionality

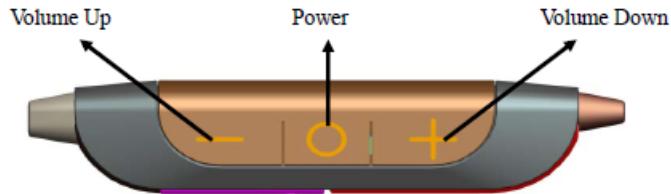

### Button Function Definitions

Order	Button icon	Button name	Event	Operate method
1	+/-	Volume Up	Volume up normally	Single press
			Volume up continuously	Hold on pressing
2	-/-	Volume Down	Volume down normally	Single press
			Volume down continuously	Hold on pressing
3	O	Power	Power on	Long press → 1s
			Power off	Very long press → 2. 5s
			Enter pairing mode	Very very long press → 5s
			Music play/pause	Single press
			Receive incoming call	Single press
			Reject incoming call	Long press → 1s
			Cancel/End active call	Single press
4	+/-	Combined Button	Enter DUT mode	Very very long press → 5s

## Section 5: LED Indications

order	Event	LED indicate
1	Power on	Blue&Red LEDs flash once
2	Power off	Blue&Red LEDs flash once
3	Pairing mode	Blue/Red LED alternately flash
4	Connectable state	Blue LED flash twice/2s
5	Connected state	Blue LED flash 3 times/2s
6	Battery low level	Red LED flash twice/1s
7	Charging	Red LED on
8	Charge completed	Blue LED on

## Section 6: Charging your cable

Here are a few simple guidelines that can greatly increase your listening enjoyment and the lifespan of your Westone Bluetooth Cable:

Your Bluetooth cable comes partially charged so that you can pair your device and start to listen to your music immediately.

To charge your cable, remove the USB cover with your fingernail and insert the micro USB to USB cable that came with your cable. Plug the other end into a USB to 120V adapter or into a device that charges USB cables such as a computer.

## Section 7: Care and Maintenance

Avoid exposing your cable and monitors to liquids and temperature extremes.

Avoid strong impacts to the cable modules.

To disconnect your cable grasp the plug at the end of the cable and pull straight out. Never pull on the cable itself as this could break the unit and avoid bending the cable at the connection to the monitors.

## Section 8: Warranty

### **Limited Product Warranty**

Westone warrants this product to be free of defects in material or workmanship for a period of one (1) year from the date of original retail purchase. This warranty is available only to the original purchaser, and only if purchased from an authorized Westone distributor or reseller. If your product is found to be defective during the warranty period, Westone will, at its sole option, either repair the product or replace the product with a new or factory reconditioned or substantially equivalent model. This limited warranty does not apply to loss, theft, or any defects attributable to damage beyond the reasonable control of Westone including damage caused by abuse, misuse, misapplication or modifications performed by anyone other than Westone. This warranty applies only to the external shell of the product, the internal components and cable.

### **Repair/Replacement Warranty**

This Limited Warranty shall apply to any repair, replacement part or replacement product for the remainder of the original warranty period or for ninety (90) days, whichever period of time is greater. Any parts or product replaced under warranty will become the property of Westone.

### **Requesting Warranty Support**

Valid warranty claims are generally processed through the point of purchase during the first thirty (30) days after retail purchase.

### **United States & Canada**

If it is necessary to return your product to Westone for warranty or post-warranty service, contact Westone to request a return merchandise authorization (RMA) number. You may call 1-800-525-5071 or go to <http://www.westoneaudio.com/support/returns.html> to submit a Product Return Request Form. Please note you will be required to submit reasonable proof of purchase date, ownership, and that the product was purchased from an authorized Westone retailer. Once you receive your RMA number, package the product securely to prevent damage in transit, include the documentation, and send prepaid and insured through a trackable shipping carrier to:

Westone Laboratories, Inc.

Attn: Music Returns Dept.

2260 Executive Circle, Colorado Springs, CO 80906 USA

Westone will be responsible for shipping to the consumer after warranty repair/replacement only. The customer is responsible for all shipping/handling charges related to returning the product to Westone.

### **International**

The warranty on this product if it is sold to a consumer outside of the United States and Canada shall comply with applicable law. To obtain warranty service, contact the dealer from which you purchased or the distributor that supplied this product. Additional charges and limitations may apply. If purchased through an authorized Westone retailer, but not through the local distributor or distributor's network, contact Westone directly (see United States & Canada instructions above). If purchased in an international location without a Westone distributor, contact Westone directly (see United States & Canada instructions above).

### **Limitation of Liability**

Westone disclaims any and all implied warranties, warranties of merchantability and fitness for a particular purpose to the maximum extent permissible by law. Westone shall not be liable for any special, incidental or consequential damages caused by the use, misuse, or inability to use this product. If purchased under a government contract, those contract terms supersede terms stated herein. In some locations, implied warranties cannot be limited. Under certain conditions, these limitations or exclusions may therefore not apply to you. This warranty replaces all other warranties for this product.

### **Section 9: FCC**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio

frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.