


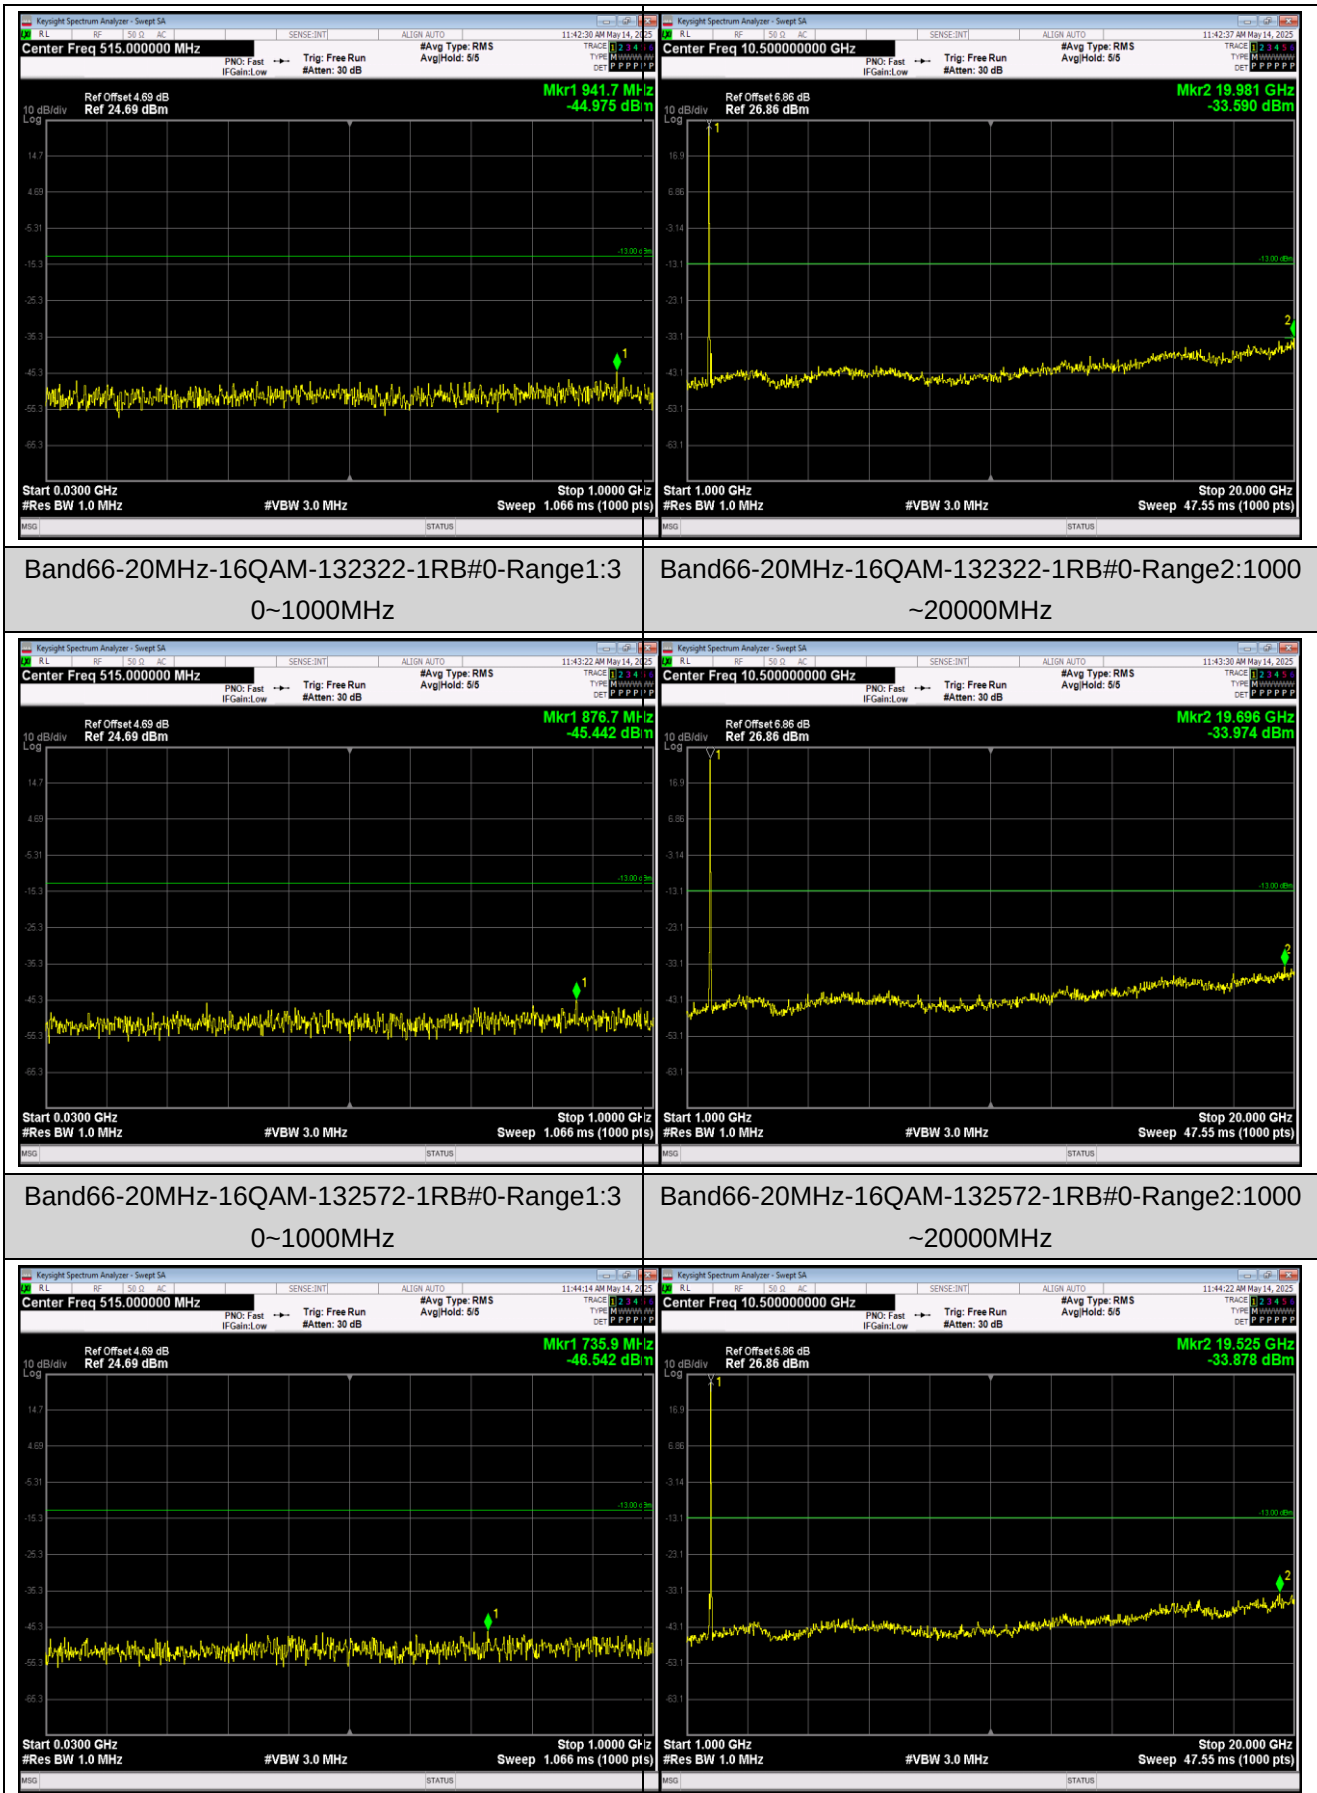



JianYan Testing Group Shenzhen Co., Ltd.

No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2504067

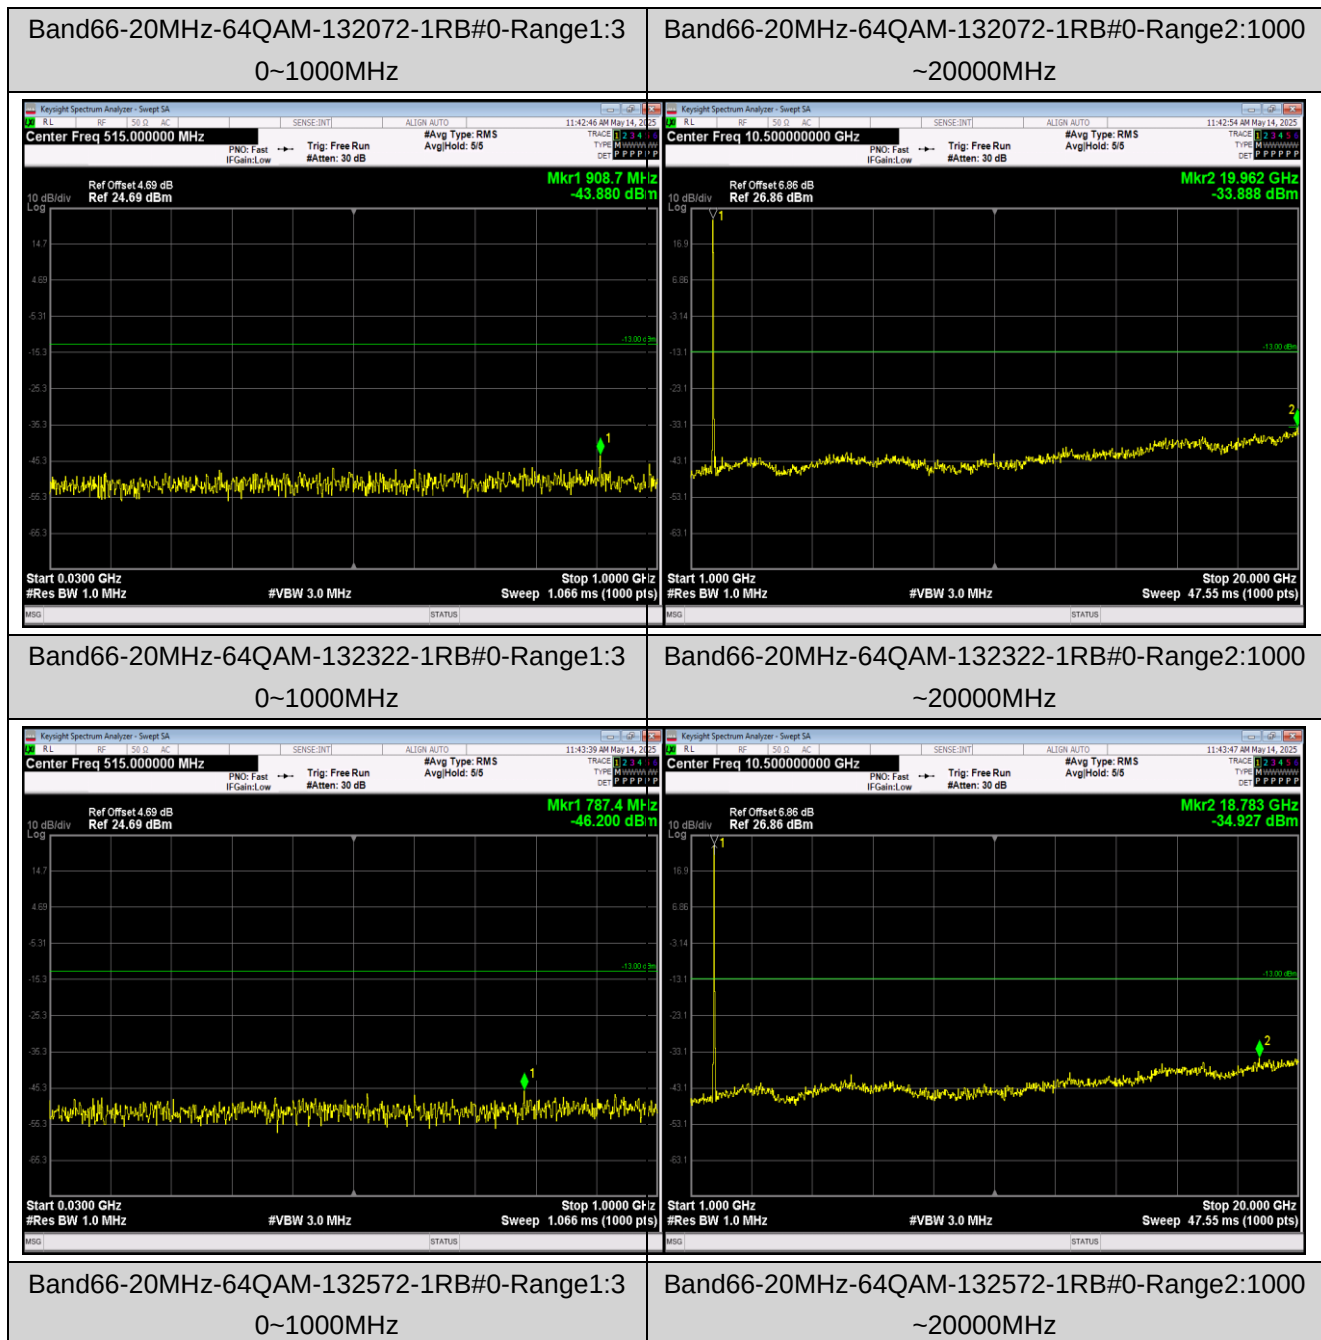

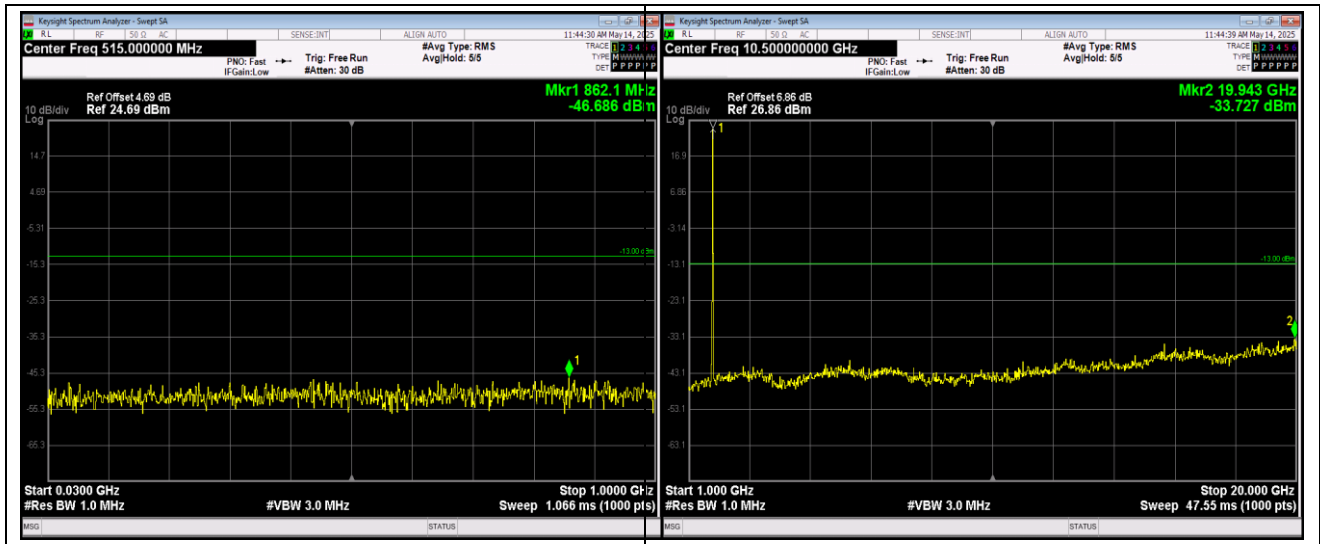

Appendix F: Frequency Stability

Test Result

LTE Band 2 part:

Reference Frequency: LTE Band 2 (10MHz) Middle channel=18900 Frequency=1880.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-41.44	-0.022043	Within authorized band for Band 2	Pass
	-20	-33.76	-0.017957		
	-10	-44.25	-0.023537		
	0	-39.30	-0.020904		
	10	-49.68	-0.026426		
	20	19.48	0.010362		
	30	16.57	0.008814		
	40	11.40	0.006064		
	50	13.83	0.007356		
16QAM					
3.85	-30	19.76	0.010511	Within authorized band for Band 2	Pass
	-20	26.22	0.013947		
	-10	19.71	0.010484		
	0	16.58	0.008819		
	10	23.36	0.012426		
	20	20.56	0.010936		
	30	28.52	0.015170		
	40	29.18	0.015521		
	50	26.79	0.014250		
64QAM					
3.85	-30	15.54	0.008266	Within authorized band for Band 2	Pass
	-20	33.13	0.017622		
	-10	25.46	0.013543		
	0	34.85	0.018537		
	10	30.06	0.015989		
	20	30.73	0.016346		
	30	28.34	0.015074		
	40	33.27	0.017697		
	50	32.76	0.017426		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-42.79	-0.022761	Within authorized band for Band 2	Pass
	3.85	-34.86	-0.018543		
	4.40	-44.69	-0.023771		
16QAM					
25	3.50	13.76	0.007319	Within authorized band for Band 2	Pass
	3.85	9.80	0.005213		
	4.40	14.03	0.007463		
64QAM					
25	3.50	-10.67	-0.005676	Within authorized band for Band 2	Pass
	3.85	31.24	0.016617		
	4.40	16.59	0.008824		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 4 part:

Reference Frequency: LTE Band 4(10MHz) Middle channel=20175 Frequency=1732.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-38.61	-0.022286	Within authorized band for Band 4	Pass
	-20	21.96	0.012675		
	-10	31.51	0.018188		
	0	-7.77	-0.004485		
	10	22.22	0.012825		
	20	31.79	0.018349		
	30	12.27	0.007082		
	40	16.77	0.009680		
	50	25.41	0.014667		
16QAM					
3.85	-30	28.92	0.016693	Within authorized band for Band 4	Pass
	-20	36.62	0.021137		
	-10	10.97	0.006332		
	0	19.71	0.011377		
	10	27.77	0.016029		
	20	14.62	0.008439		
	30	37.15	0.021443		
	40	43.20	0.024935		
	50	14.46	0.008346		
64QAM					
3.85	-30	-27.84	-0.016069	Within authorized band for Band 4	Pass
	-20	-32.74	-0.018898		
	-10	-25.62	-0.014788		
	0	-26.45	-0.015267		
	10	-30.63	-0.017680		
	20	-12.25	-0.007071		
	30	-6.44	-0.003717		
	40	-17.25	-0.009957		
	50	-28.40	-0.016392		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-8.63	-0.004981	Within authorized band for Band 4	Pass
	3.85	-31.09	-0.017945		
	4.40	-19.20	-0.011082		
16QAM					
25	3.50	-14.79	-0.008537	Within authorized band for Band 4	Pass
	3.85	38.08	0.021980		
	4.40	31.21	0.018014		
64QAM					
25	3.50	15.09	0.008710	Within authorized band for Band 4	Pass
	3.85	26.08	0.015053		
	4.40	18.51	0.010684		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 5 part:

Reference Frequency: LTE Band 5(10MHz) Middle channel=20525 Frequency=836.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	47.11	0.056318	±2.5	Pass
	-20	-16.62	-0.019868		
	-10	-9.37	-0.011201		
	0	-13.20	-0.015780		
	10	-8.31	-0.009934		
	20	-20.81	-0.024877		
	30	-26.88	-0.032134		
	40	-15.61	-0.018661		
	50	-6.22	-0.007436		
16QAM					
3.85	-30	9.06	0.010831	±2.5	Pass
	-20	-8.88	-0.010616		
	-10	-17.54	-0.020968		
	0	-6.64	-0.007938		
	10	6.01	0.007185		
	20	8.34	0.009970		
	30	-7.18	-0.008583		
	40	-5.24	-0.006264		
	50	-4.08	-0.004877		
64QAM					
3.85	-30	-13.00	-0.015541	±2.5	Pass
	-20	-10.20	-0.012194		
	-10	-18.05	-0.021578		
	0	-30.36	-0.036294		
	10	-47.66	-0.056975		
	20	-17.32	-0.020705		
	30	-25.16	-0.030078		
	40	-17.18	-0.020538		
	50	-26.58	-0.031775		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	22.24	0.026587	±2.5	Pass
	3.85	-3.71	-0.004435		
	4.40	32.77	0.039175		
16QAM					
25	3.50	13.09	0.015649	±2.5	Pass
	3.85	4.73	0.005655		
	4.40	6.05	0.007233		
64QAM					
25	3.50	-18.21	-0.021769	±2.5	Pass
	3.85	-6.27	-0.007496		
	4.40	-13.96	-0.016689		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 7 part:

Reference Frequency: LTE Band 7(10MHz) Middle channel=21100 Frequency=2535.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-31.41	-0.012391	Within authorized band for Band 7	Pass
	-20	-32.27	-0.012730		
	-10	-39.45	-0.015562		
	0	-47.51	-0.018742		
	10	-60.45	-0.023846		
	20	11.39	0.004493		
	30	-4.94	-0.001949		
	40	-9.68	-0.003819		
	50	-17.50	-0.006903		
16QAM					
3.85	-30	-33.13	-0.013069	Within authorized band for Band 7	Pass
	-20	-40.50	-0.015976		
	-10	-39.80	-0.015700		
	0	-36.25	-0.014300		
	10	-36.06	-0.014225		
	20	-37.78	-0.014903		
	30	-30.44	-0.012008		
	40	-27.37	-0.010797		
	50	-25.86	-0.010201		
64QAM					
3.85	-30	36.44	0.014375	Within authorized band for Band 7	Pass
	-20	-23.50	-0.009270		
	-10	10.56	0.004166		
	0	43.73	0.017250		
	10	31.51	0.012430		
	20	-7.31	-0.002884		
	30	18.25	0.007199		
	40	33.66	0.013278		
	50	53.01	0.020911		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-28.47	-0.011231	Within authorized band for Band 7	Pass
	3.85	-32.87	-0.012966		
	4.40	-27.01	-0.010655		
16QAM					
25	3.50	-31.16	-0.012292	Within authorized band for Band 7	Pass
	3.85	-25.16	-0.009925		
	4.40	-37.36	-0.014738		
64QAM					
25	3.50	18.30	0.007219	Within authorized band for Band 7	Pass
	3.85	-13.07	-0.005156		
	4.40	27.05	0.010671		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 12 part:

Reference Frequency: LTE Band 12(10MHz) Middle channel=23095 Frequency=707.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-7.72	-0.010912	Within authorized band for Band 12	Pass
	-20	-6.78	-0.009583		
	-10	-8.40	-0.011873		
	0	-9.61	-0.013583		
	10	-9.40	-0.013286		
	20	-8.14	-0.011505		
	30	-8.73	-0.012339		
	40	-7.84	-0.011081		
	50	-8.44	-0.011929		
16QAM					
3.85	-30	-2.40	-0.003392	Within authorized band for Band 12	Pass
	-20	5.38	0.007604		
	-10	4.26	0.006021		
	0	9.81	0.013866		
	10	15.16	0.021428		
	20	18.30	0.025866		
	30	24.10	0.034064		
	40	25.85	0.036537		
	50	31.13	0.044000		
64QAM					
3.85	-30	45.96	0.064961	Within authorized band for Band 12	Pass
	-20	48.68	0.068806		
	-10	-6.57	-0.009286		
	0	6.08	0.008594		
	10	11.43	0.016155		
	20	17.90	0.025300		
	30	25.18	0.035590		
	40	27.77	0.039251		
	50	34.05	0.048127		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-10.81	-0.015279	Within authorized band for Band 12	Pass
	3.85	-7.17	-0.010134		
	4.40	-7.47	-0.010558		
16QAM					
25	3.50	-7.22	-0.010205	Within authorized band for Band 12	Pass
	3.85	-10.99	-0.015534		
	4.40	-5.12	-0.007237		
64QAM					
25	3.50	39.53	0.055873	Within authorized band for Band 12	Pass
	3.85	34.06	0.048141		
	4.40	43.29	0.061187		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 13 part:

Reference Frequency: LTE Band 13(10MHz) Middle channel=23230 Frequency=782.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	38.64	0.049412	Within authorized band for Band 13	Pass
	-20	37.48	0.047928		
	-10	38.87	0.049706		
	0	34.06	0.043555		
	10	32.89	0.042059		
	20	29.87	0.038197		
	30	27.85	0.035614		
	40	25.56	0.032685		
	50	22.22	0.028414		
16QAM					
3.85	-30	23.35	0.029859	Within authorized band for Band 13	Pass
	-20	21.76	0.027826		
	-10	24.96	0.031918		
	0	21.60	0.027621		
	10	24.59	0.031445		
	20	28.37	0.036279		
	30	29.74	0.038031		
	40	31.84	0.040716		
	50	34.43	0.044028		
64QAM					
3.85	-30	46.55	0.059527	Within authorized band for Band 13	Pass
	-20	49.55	0.063363		
	-10	56.63	0.072417		
	0	6.49	0.008299		
	10	15.42	0.019719		
	20	18.75	0.023977		
	30	24.98	0.031944		
	40	30.53	0.039041		
	50	37.05	0.047379		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	36.64	0.046854	Within authorized band for Band 13	Pass
	3.85	37.47	0.047916		
	4.40	38.92	0.049770		
16QAM					
25	3.50	21.94	0.028056	Within authorized band for Band 13	Pass
	3.85	21.87	0.027967		
	4.40	21.50	0.027494		
64QAM					
25	3.50	40.25	0.051471	Within authorized band for Band 13	Pass
	3.85	35.51	0.045409		
	4.40	41.87	0.053542		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 17 part:

Reference Frequency: LTE Band 17(10MHz) Middle channel=23790 Frequency=710.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-47.36	-0.066704	Within authorized band for Band 17	Pass
	-20	-4.01	-0.005648		
	-10	-3.40	-0.004789		
	0	-15.72	-0.022141		
	10	-21.40	-0.030141		
	20	-32.20	-0.045352		
	30	-41.08	-0.057859		
	40	-51.24	-0.072169		
	50	-10.16	-0.014310		
16QAM					
3.85	-30	-44.15	-0.062183	Within authorized band for Band 17	Pass
	-20	-7.41	-0.010437		
	-10	-12.04	-0.016958		
	0	-21.74	-0.030620		
	10	-33.25	-0.046831		
	20	-26.75	-0.037676		
	30	-3.82	-0.005380		
	40	14.45	0.020352		
	50	24.28	0.034197		
64QAM					
3.85	-30	3.98	0.005606	Within authorized band for Band 17	Pass
	-20	-17.94	-0.025268		
	-10	-31.23	-0.043986		
	0	11.84	0.016676		
	10	-12.27	-0.017282		
	20	-26.14	-0.036817		
	30	-40.38	-0.056873		
	40	-5.64	-0.007944		
	50	-22.54	-0.031746		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-32.06	-0.045155	Within authorized band for Band 17	Pass
	3.85	-22.06	-0.031070		
	4.40	-43.29	-0.060972		
16QAM					
25	3.50	-30.01	-0.042268	Within authorized band for Band 17	Pass
	3.85	-17.38	-0.024479		
	4.40	-37.64	-0.053014		
64QAM					
25	3.50	17.57	0.024746	Within authorized band for Band 17	Pass
	3.85	23.57	0.033197		
	4.40	11.80	0.016620		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 26 part:

Reference Frequency: LTE Band 26(10MHz) Middle channel=26740 Frequency=819.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-41.87	-0.051123	Within authorized band for Band 26	Pass
	-20	-40.73	-0.049731		
	-10	-37.78	-0.046129		
	0	-34.73	-0.042405		
	10	-30.18	-0.036850		
	20	-25.72	-0.031404		
	30	-24.38	-0.029768		
	40	-20.60	-0.025153		
	50	-18.08	-0.022076		
16QAM					
3.85	-30	4.25	0.005189	Within authorized band for Band 26	Pass
	-20	4.84	0.005910		
	-10	5.84	0.007131		
	0	6.31	0.007705		
	10	5.97	0.007289		
	20	5.34	0.006520		
	30	10.23	0.012491		
	40	11.49	0.014029		
	50	13.12	0.016020		
64QAM					
3.85	-30	24.08	0.029402	Within authorized band for Band 26	Pass
	-20	28.25	0.034493		
	-10	32.04	0.039121		
	0	33.59	0.041013		
	10	35.76	0.043663		
	20	38.58	0.047106		
	30	37.04	0.045226		
	40	41.03	0.050098		
	50	43.92	0.053626		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-44.42	-0.054237	Within authorized band for Band 26	Pass
	3.85	-42.60	-0.052015		
	4.40	-43.82	-0.053504		
16QAM					
25	3.50	-7.50	-0.009158	Within authorized band for Band 26	Pass
	3.85	-10.51	-0.012833		
	4.40	-5.55	-0.006777		
64QAM					
25	3.50	18.20	0.022222	Within authorized band for Band 26	Pass
	3.85	15.95	0.019475		
	4.40	19.44	0.023736		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 26 part:

Reference Frequency: LTE Band 26(10MHz) Middle channel=26915 Frequency=836.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-24.25	-0.028990	Within authorized band for Band 26	Pass
	-20	-23.75	-0.028392		
	-10	-26.82	-0.032062		
	0	-26.12	-0.031225		
	10	-25.71	-0.030735		
	20	-27.95	-0.033413		
	30	-32.44	-0.038781		
	40	-33.96	-0.040598		
	50	-40.87	-0.048858		
16QAM					
3.85	-30	-46.23	-0.055266	Within authorized band for Band 26	Pass
	-20	-46.35	-0.055409		
	-10	-48.11	-0.057513		
	0	4.62	0.005523		
	10	-2.68	-0.003204		
	20	-4.31	-0.005152		
	30	-7.25	-0.008667		
	40	-10.94	-0.013078		
	50	-6.92	-0.008273		
64QAM					
3.85	-30	-8.55	-0.010221	Within authorized band for Band 26	Pass
	-20	-6.61	-0.007902		
	-10	-1.50	-0.001793		
	0	-4.21	-0.005033		
	10	-4.26	-0.005093		
	20	-5.64	-0.006742		
	30	-8.37	-0.010006		
	40	-5.54	-0.006623		
	50	-2.95	-0.003527		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-19.28	-0.023048	Within authorized band for Band 26	Pass
	3.85	-11.62	-0.013891		
	4.40	-23.62	-0.028237		
16QAM					
25	3.50	-45.39	-0.054262	Within authorized band for Band 26	Pass
	3.85	-45.33	-0.054190		
	4.40	-45.10	-0.053915		
64QAM					
25	3.50	-10.31	-0.012325	Within authorized band for Band 26	Pass
	3.85	-10.54	-0.012600		
	4.40	-8.40	-0.010042		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 41 part:

Reference Frequency: LTE Band 41 (10MHz) Middle channel=40640 Frequency=2595.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	-13.33	-0.005141	Within authorized band for Band 41	Pass
	-20	-10.37	-0.003999		
	-10	-11.62	-0.004481		
	0	-14.35	-0.005534		
	10	-17.67	-0.006815		
	20	-17.61	-0.006791		
	30	-21.84	-0.008423		
	40	-25.32	-0.009765		
	50	-28.98	-0.011176		
16QAM					
3.85	-30	-24.28	-0.009364	Within authorized band for Band 41	Pass
	-20	-22.60	-0.008716		
	-10	-11.93	-0.004601		
	0	6.35	0.002449		
	10	11.16	0.004304		
	20	15.94	0.006147		
	30	16.98	0.006548		
	40	26.87	0.010363		
	50	29.61	0.011419		
64QAM					
3.85	-30	50.30	0.019398	Within authorized band for Band 41	Pass
	-20	-26.45	-0.010201		
	-10	-18.20	-0.007019		
	0	-6.81	-0.002626		
	10	12.69	0.004894		
	20	22.50	0.008677		
	30	28.41	0.010956		
	40	35.89	0.013841		
	50	30.20	0.011647		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	-10.39	-0.004007	Within authorized band for Band 41	Pass
	3.85	9.76	0.003764		
	4.40	-7.54	-0.002908		
16QAM					
25	3.50	-20.21	-0.007794	Within authorized band for Band41	Pass
	3.85	-24.73	-0.009537		
	4.40	-21.93	-0.008457		
64QAM					
25	3.50	36.49	0.014073	Within authorized band for Band41	Pass
	3.85	34.63	0.013355		
	4.40	48.89	0.018855		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 66 part:

Reference Frequency: LTE Band 66 (10MHz) Middle channel=132322 Frequency=1745.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.85	-30	35.69	0.020453	Within authorized band for Band 66	Pass
	-20	27.19	0.015582		
	-10	6.24	0.003576		
	0	-23.46	-0.013444		
	10	-4.99	-0.002860		
	20	-42.10	-0.024126		
	30	-32.09	-0.018390		
	40	-20.79	-0.011914		
	50	-44.56	-0.025536		
16QAM					
3.85	-30	-31.04	-0.017788	Within authorized band for Band 66	Pass
	-20	-25.23	-0.014458		
	-10	-16.42	-0.009410		
	0	-27.09	-0.015524		
	10	-6.42	-0.003679		
	20	-18.77	-0.010756		
	30	-33.67	-0.019295		
	40	-17.82	-0.010212		
	50	-31.34	-0.017960		
64QAM					
3.85	-30	16.47	0.009438	Within authorized band for Band 66	Pass
	-20	23.26	0.013330		
	-10	26.76	0.015335		
	0	30.70	0.017593		
	10	26.31	0.015077		
	20	36.44	0.020883		
	30	34.30	0.019656		
	40	35.33	0.020246		
	50	35.49	0.020338		

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.50	5.54	0.003175	Within authorized band for Band 66	Pass
	3.85	-14.58	-0.008355		
	4.40	24.40	0.013983		
16QAM					
25	3.50	-37.31	-0.021381	Within authorized band for Band 66	Pass
	3.85	-56.38	-0.032309		
	4.40	7.81	0.004476		
64QAM					
25	3.50	15.95	0.009140	Within authorized band for Band 66	Pass
	3.85	12.57	0.007203		
	4.40	20.03	0.011479		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result	Verdict
Band2	20MHz	QPSK	18900	100RB#0	PASS	PASS
Band2	20MHz	16QAM	18900	100RB#0	PASS	PASS
Band2	20MHz	64QAM	18900	100RB#0	PASS	PASS
Band4	20MHz	QPSK	20175	100RB#0	PASS	PASS
Band4	20MHz	16QAM	20175	100RB#0	PASS	PASS
Band4	20MHz	64QAM	20175	100RB#0	PASS	PASS
Band5	10MHz	QPSK	20525	50RB#0	PASS	PASS
Band5	10MHz	16QAM	20525	50RB#0	PASS	PASS
Band5	10MHz	64QAM	20525	50RB#0	PASS	PASS
Band7	20MHz	QPSK	21100	100RB#0	PASS	PASS
Band7	20MHz	16QAM	21100	100RB#0	PASS	PASS
Band7	20MHz	64QAM	21100	100RB#0	PASS	PASS
Band12	10MHz	QPSK	23095	50RB#0	PASS	PASS
Band12	10MHz	16QAM	23095	50RB#0	PASS	PASS
Band12	10MHz	64QAM	23095	50RB#0	PASS	PASS
Band13	10MHz	QPSK	23230	50RB#0	PASS	PASS
Band13	10MHz	16QAM	23230	50RB#0	PASS	PASS
Band13	10MHz	64QAM	23230	50RB#0	PASS	PASS
Band17	10MHz	QPSK	23790	50RB#0	PASS	PASS
Band17	10MHz	16QAM	23790	50RB#0	PASS	PASS
Band17	10MHz	64QAM	23790	50RB#0	PASS	PASS
Band26	10MHz	QPSK	26740	50RB#0	PASS	PASS
Band26	10MHz	16QAM	26740	50RB#0	PASS	PASS
Band26	10MHz	64QAM	26740	50RB#0	PASS	PASS
Band26	15MHz	QPSK	26915	75RB#0	PASS	PASS
Band26	15MHz	16QAM	26915	75RB#0	PASS	PASS
Band26	15MHz	64QAM	26915	75RB#0	PASS	PASS
Band41	20MHz	QPSK	40620	100RB#0	PASS	PASS
Band41	20MHz	16QAM	40620	100RB#0	PASS	PASS
Band41	20MHz	64QAM	40620	100RB#0	PASS	PASS
Band66	20MHz	QPSK	132322	100RB#0	PASS	PASS
Band66	20MHz	16QAM	132322	100RB#0	PASS	PASS
Band66	20MHz	64QAM	132322	100RB#0	PASS	PASS

Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

