


EN

E ERATO

## MUSE 5 True Wireless Earphone

Left earbud Right earbud  
(Master)  
Four golden dots on top



① CHECK "R" AND "L" MARKS AT BACK OF THE EARBUDS



② PUT ON THE EARBUDS AS SHOWN



③ TURN THE EARBUDS FORWARD TO FIT COMFORTABLY IN EARS



④ 5 SEC PUSH ON THE LEFT EARBUD - LISTEN FOR VOICE PROMPT



Left earbud (Master)

⑤ PAIRING



⑥ TAP ON "MUSE 5"



YOUR HEADSET IS CONNECTED

1

E ERATO



Right earbud

⑦ 2 SEC PUSH ON THE RIGHT EARBUD - LISTEN FOR VOICE PROMPT



POWER ON  
TRUE WIRELESS STEREO CONNECTED

### Button functions



Left earbud  
(Master)

Basic	Phone Call	Play Music
ON/OFF	Pairing	▶
—	—	—
Siri	Google	—
••	••	—
ERATOSURROUND	••••	—



Right earbud

Basic	Play Music
ON/OFF	▶
—	—
—	—
—	—

• One click    •• Double click    •••• Click 4 times  
— Long press 2 secs    — Long press 5 secs

### ERATOSURROUND

1. When using earbuds for the first time, 3D surround is enabled as default mode.
2. At standby mode, click 4 times on the left earbud button to switch modes.
3. When listening to music, one click on the left earbud button first, then click 4 times on the left earbud button to switch modes.



Left earbud  
(Master)

2

## E ERATO

3D enable  
(Red flashing 2 times  
Beep sound 2 times)



click 4 times on the left  
earbud button

3D disable  
(Red flashing 4 times  
Beep sound 4 times)



Wide 3D enable  
(Red flashing 3 times  
Beep sound 3 times)



click 4 times on the left  
earbud button

### Ear tips and FitSeal™

FitSeal™ SILICON SLEEVES




SILICON EAR TIPS



### FITS EAR CONCH AREA + FITS INSIDE EAR CANAL

For optimal comfortable and sound choose from a variety of FitSeal™ Sleeves and silicone ear tips.

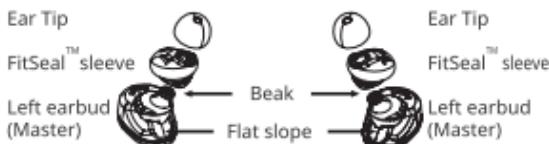

When changing the FitSeal™ Sleeve, make sure the beak of the sleeve lines up with the flat slope of the earbud.

## E ERATO

### LED indicators



Left earbud (Master)



Right earbud

Event	LED pattern description
Power on	Left: Blue / Right : Red
Power off	Purple
Charging, battery not full	Red breathing
Low battery	Changed to red
Pairing	Red and blue flash alternating
Standby	Red flashing

### Charging indicators

Left earbud Right earbud  
(Master)



Place the earbuds into the  
charging case.

Close lid until it clicks.

Event	LED pattern description
Charging the Earbuds	Erbuds: Red breathing Charger case: Red
Full battery	Erbuds: Blue for 1 minutes then light off. Charger case: Light off
Pushing the Charging case button	Blue light: Full battery Red light: less than 30% electricity



## Specifications

Bluetooth specification	BT Version 4.1
Bluetooth Profile	A2DP 1.2 , AVRCP 1.4 , HFP 1.6 ,HSP 1.2
Supported Audio Codecs	aptX / AAC / SBC
Wireless range (from paired device)	10 meters (30feet)
Battery capacity	100 mAh / each one 700 mAh / Charging Case
Driver size	Ø 5.8mm Micro Driver
Sensitivity	101dB @ 1kHz
Frequency	20Hz ~ 20KHz
Impedance	16 Ohm
Microphone	-42dB (+, - 3dB)
MEMS Omni Direction Type Input Sensitivity	
Waterproof for earpiece	Nano Coating IPX5
Dimensions	Earphone : 25.2mm(L) x 20mm(D) x 30mm(H) Charging case : 78.1mm (L) x 39.2mm (D) x 39.77mm(H)
Weight	Earphone: 8.5g x 2pcs / Charging case : 46g

## Operation

- Earphone : 4hrs music play time / 6hrs talk time
- Time to fully charge : 2hrs
- Charging case capacity : Minimum of two full earphone battery charges while on the go.