Brightwrist

Smartwatch
Wearable Technology

BW09PRO

User Guide

Please read the manual before use.

* For further information, please visit *www.brightwrist.com*

About this manual

You can use this BW09PRO as a companion device to some Android™ and IOS mobile devices. This user manual is specially designed to explain applications and features that are available when the BW09PRO is connected to a mobile device.

- Please read this manual before using the BW09PRO to ensure safe and proper use.
- Descriptions are based on the BW09PRO's default settings.
- Images and screenshots may differ in appearance from the actual product.
- Available features and additional services may vary by BW09PRO, software.
- Applications and their functions may vary by country, region, or hardware specifications. Brightwrist is not liable for performance issues caused by applications from any provider other than Brightwrist.
- Brightwrist is not liable for performance issues or incompatibilities caused by edited registry settings or modified operating system software. Attempting to customize the operating system may cause the BW09PRO or applications to work improperly.
- Software, sound sources, wallpapers, images, and other media provided with this BW09PRO are licensed for limited use. Extracting and using these materials for commercial or other purposes is an infringement of copyright laws. Users are entirely responsible for illegal use of media.
- Default applications that come with the BW09PRO are subject to updates and may no longer be supported without prior notice.
- Modifying the BW09PRO's operating system or installing software's from unofficial sources may result in BW09PRO malfunctions and data corruption or loss. These actions are violations of your Brightwrist license agreement and will void your warranty.

Copyright

Trademarks

- BRIGHTWRIST and the BRIGHTWRIST logo are registered trademarks of Brightwrist, LLC.
- Bluetooth® is a registered trademark of Bluetooth SIG, Inc. worldwide.
- All other trademarks and copyrights are the property of their respective owners.

Getting started

About Brightwrist BW09PRO

Use as a Bluetooth Device. When you connect the Brightwrist Smartwatch (also referred to as BW09PRO) to your mobile device, you can use the BW09PRO to view call logs or set alarms. You can use mobile devices more conveniently by connecting to various applications with the BW09PRO. Set your exercise goal and monitor the data on the BW09PRO.

For Android devices, install "BTNotification" on the mobile device to connect your BW09PRO to a mobile device. Scan the QR code on the box or download it at: *https://unibuying.blob.core.windows.net/apks/BTNotification_K6.apk*

For IOS mobile device, the BW09PRO works as a Bluetooth device. Turn on Bluetooth on both mobile device and the BW09PRO, and simply search and pair. You can use the BW09PRO to receive and make calls via Bluetooth. "BTNotification" software is currently unavailable for IOS devices, thus applications including "Remote Notification" (Notification Push), "Remote Capture" and "Anti-lost" will not work with IOS mobile devices.

Use as a Smart Watch Phone.
To use the BW09PRO as an individual watch phone (meaning to use without connecting to a mobile device), you need to place your SIM card into it (only micro SIM card is suitable for the slot, if you are using full-size or Nano SIM card, please change). Remove your SIM card from your mobile device. Open the back cover and remove the battery. Gently slide the metal cover upwards according to the "OPEN" direction written on it. Lift the metal cover up and place your micro SIM into the slot with the SIM chip facing down. Close the metal cover and slide it downwards according to the "LOCK" direction. Insert the battery, and now the BW09PRO is ready to use as a watch phone.

If the BW09PRO cannot find your mobile network provider, go to "Settings → Network Settings → Network Selection → Select Network". It will search your mobile network provider automatically. This will take a few seconds. When the searching is done, you should be able to find your network provider. Tap the provider and your BW09PRO is connected to the network.

Note: the BW09PRO only support 2G network: GSM 850/900/1800/1900 MHz. If you are using a 3G network, the BW09PRO will automatically choose the 2G network.
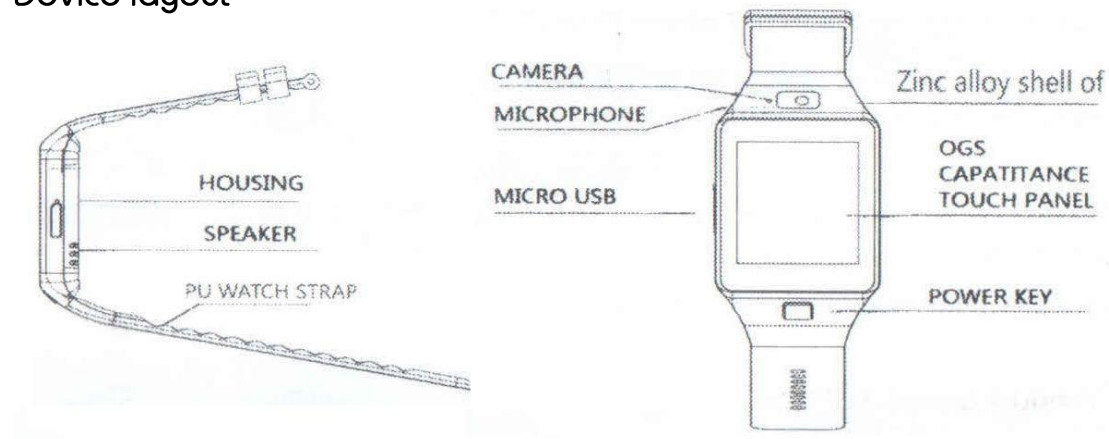
Package contents

Check the product box for the following items:
* Brightwrist BW09PRO
* Charging adapter
* USB cable
* User guide

Other accessories may not be compatible with your BW09PRO. Malfunctions caused by using unapproved accessories are not covered by the warranty service.

Device layout

Cautions

* Humidity and liquids may damage your BW09PRO. Keep your BW09PRO dry.
* Ensure that the strap is kept clean. Contact with contaminants, such as dust and dye, can cause stains on the strap that may not be fully removed.
* Do not allow water to contact the touch screen. The touch screen may malfunction in humid conditions or when exposed to water.
* If the speaker is wet, sound may be distorted. Ensure that the speaker is dry.

Maintaining water and dust resistance

The device may be damaged if water or dust enters the device. Follow these tips carefully to prevent damage to the device and to maintain the performance of the device.
* Do not immerse the device in water.
* If the device or your hands are wet, dry them thoroughly before handling the device.
* If the device is exposed to freshwater, dry it thoroughly with a clean, soft cloth. If the device is exposed to any liquid other than freshwater, wipe the device with freshwater immediately and dry it thoroughly with a clean, soft cloth.
* If the device has been immersed in water or the microphone or the speaker is wet, sound may not be heard clearly during a call. Ensure that the microphone or the speaker is clean and dry by wiping it with a dry cloth.
* The touch screen and other features may not work properly if the device is used in water or in other liquids.

Charging the battery

Charge the battery before using the BW09PRO for the first time. A computer can be also used to charge the BW09PRO by connecting them via the USB cable.

• When the battery power is low, the battery icon appears empty.
• If the battery is completely discharged, the BW09PRO cannot be turned on immediately when the charger is connected. Allow a depleted battery to charge for a few minutes before turning on the BW09PRO.

Connecting the charger improperly may cause serious damage to the BW09PRO. Any damage caused by misuse is not covered by the warranty.

• If the BW09PRO receives an unstable power supply while charging, the touch screen may not function. If this happens, unplug the charger from the BW09PRO.
• While charging, the BW09PRO may heat up. This is normal and should not affect the BW09PRO's lifespan or performance. If the battery gets hotter than usual, unplug the charger immediately.
• To save energy, unplug the charger when not in use. The charger does not have a power switch, so you must unplug the charger from the electric socket when not in use to avoid wasting power. The charger should remain close to the electric socket and easily accessible while charging.

About using battery

• Battery operating time is affected by device usage patterns and the condition of the battery.
• The battery is a consumable item. Battery life can be reduced when multiple applications or features are running simultaneously. Also, even if the device is not being used, battery life may be reduced.
• The battery is consumable and the useful charge will get shorter over time.
• Battery power can also be affected when you play high-definition video. The effects on battery power may vary depending on the situation.

Turning the BW09PRO on and off

Press and hold the Power button for a few seconds to turn on the BW09PRO. You can use the BW09PRO either with SIM card inserted, or as a Bluetooth device after BTNotification is installed on the mobile device. Refer to "Connecting the BW09PRO to a mobile device" for details. Follow all posted warnings and directions from authorized personnel in areas where the use of wireless devices is restricted, such as airplanes and hospitals. To turn off the BW09PRO, press and hold the Power button, and then tap "Yes" to Power off.

Notices for using Bluetooth

- To avoid problems when connecting your BW09PRO to another mobile device, place the devices close to each other.
- Ensure that your BW09PRO and the other Bluetooth device are within the Bluetooth connection range (10 m). The distance may vary depending on the environment the devices are used in.
- Ensure that there are no obstacles between your BW09PRO and a connected mobile device, including human bodies, walls, corners, or fences.
- Do not touch the Bluetooth antenna of a connected mobile device.
- Bluetooth uses the same frequency as some industrial, scientific, medical, and low power products and interference may occur when making connections near these types of products.
- Brightwrist is not responsible for the loss, interception, or misuse of data sent or received via the Bluetooth feature.
- Always ensure that you share and receive data with devices that are trusted and properly secured. If there are obstacles between the devices, the operating distance may be reduced.
- Some devices, especially those that are not tested or approved by the Bluetooth SIG, may be incompatible with your BW09PRO.
- Do not use the Bluetooth feature for illegal purposes (for example, pirating copies of files or illegally tapping communications for commercial purposes). Brightwrist is not responsible for the repercussion of illegal use of the Bluetooth feature.

Connecting the BW09PRO to a mobile device

Install BTNotification on the mobile device and connect the BW09PRO to the device via Bluetooth.

- You can connect only one mobile device to one BW09PRO. You cannot use multiple BW09PRO at the same time.

1   On BW09PRO's Home screen, tap "Menu" and flick to the "Quick Response" panel.
2   Tap "Quick Response" icon and scan the QR code using any QR Code scanner. (If any problems occur, see step 3)
3   On your mobile device, you can also download it via visit:
    https://unibuying.blob.core.windows.net/apks/BTNotification_K6.apk
4   On mobile device, tap BTNotification. Click the up right-hand corner and tap "Bluetooth Settings". Activate Bluetooth in your phone and search for BW09PRO. Select Brightwrist BW09PRO (DZ09 may show as the model number). When the Bluetooth pairing request window appears both on mobile phone and BW09PRO, tap "Pair" on your phone screen and tap "Yes" on the BW09PRO screen.
5   On mobile device, follow the on-screen instructions.

- You can adjust the BW09PRO's configuration in BTNotification.
- Connection methods may vary depending on the type of device and the device's software version.

Locking and unlocking the BW09PRO

When not in use, lock the BW09PRO to prevent unwanted operation. Pressing the Power button on the Home screen turns off the screen and puts the BW09PRO into lock mode. The BW09PRO automatically gets locked if it is not used for a specified period. To unlock the BW09PRO, press the Power button and flick down to go to the Home panel.

Basics

Using the touch screen

Use only fingers to use the touch screen.
- Do not allow the touch screen to come into contact with other electrical devices. Electrostatic discharges can cause the touch screen to malfunction.
- To avoid damaging the touch screen, do not tap it with anything sharp or apply excessive pressure to it with your fingertips.
- The BW09PRO may not recognize touch inputs close to the edges of the screen, which are outside of the touch input area.
- Leaving the touch screen idle for extended periods may result in afterimages (screen burn-in) or ghosting. Turn off the touch screen when you do not use the BW09PRO.

Using the Clock screen

While using the BW09PRO, press the Power button to open the Clock screen. Tap screen to switch clock type.

Viewing the Home screen
View the BW09PRO's Home screen when you connect it to the mobile device. It displays the clock, shortcuts to applications, and others. The Home screen can have multiple panels. To view other panels, scroll left or right.

Apps screen
The Apps screen displays icons for all applications. To view other panels, scroll left or right.

Changing the Theme
The BW09PRO has five sets of theme. You can change the theme by tapping into the "Theme" icon.

Using calling features

Making a call
On the Home screen, tap Dialer, enter a number using the keypad, and then tap the green button to make a call. Alternatively, on the Home screen, tap Contacts →a contact →a phone number, or tap Menu →Logs → Missed/ Dialed / Received / All Calls → a contact.

During a call

You can select from the following actions:

•Adjust the volume.
•Turn off the microphone so that the other party cannot hear you.
•Open the keypad.
•Open settings to hold call, etc.
•End the current call.

Answering a call

When a call comes in, tap the green button.

Rejecting a call

When a call comes in, tap the red button.

Using notifications

Stay up-to-date with a variety of events, such as missed calls or new messages, received on the connected mobile device. If a message includes long text or attachments, check the message details on your connected mobile device.

Featured Applications

Anti-lost

Use this application to find or to be found by the connected mobile device. Tap "Anti-lost" on the Apps screen, and select "Looking Phone". The mobile device rings. This feature is available only when the BW09PRO and the mobile device are connected and both are on "Sound Mode".

BT Dialer

Use this application to make Bluetooth calls. This feature is only available if the BW09PRO Connected to the mobile device via Bluetooth.

Image Viewer

Use this application to view images stored in the BW09PRO. Tap "Image Viewer" on the Apps screen. Scroll left or right to view the next or previous image.

Video Player

Use this application to view videos stored in the BW09PRO.

Pedometer

On the step count screen, start the pedometer to count your steps and view the distance walked and burned calories.

Sleep Monitor

Use this application to monitor your sleep patterns and record how much sleep you get by detecting body movements while you sleep.

Sedentary Reminder

Use this application to set the time to remind to stand up and relax.

Audio Player

Use this application to play music stored in the BW09PRO or the mobile device only if they are connected.

Sound Recorder

Use this application to record voice. The sound recorded are stored on the BW09PRO.

Contacts

Use this application to view the connected mobile device's contacts list on the BW09PRO.

Logs

Use this application to view the connected mobile device's call and message logs on the BW09PRO.

Quick Response

Use this application to generate the QR code to download the BTNotification.

Camera

Use this application to take photos.

Remote Capture

Use this application to control your phone camera and take photos. Photos are stored in your phone.

Bluetooth

Configure settings for the Bluetooth feature.
On the Home screen, tap Menu → Bluetooth.
- Bluetooth: Turn the Bluetooth feature on or off.
- Make visible: Set the BW09PRO to appear on other devices' lists when they search for Bluetooth devices.
- Name: Customize the name of your BW09PRO.

Profile

Switch profiles by selecting different modes.

Browser: Use this application to browse website. The BW09PRO needs an activated SIM card inserted to use the internet.

FM Radio

Use this application to listen to the FM radio. A customized 7-pin earphone is needed for this function.

Settings

Use this application to set date and time, change system languages, call and notification settings, security and reset.

- Reset settings to the factory default values and delete all data. Default applications are not deleted. Security code is 1122 by default.

BTNotification

Download BTNotification

BTNotification can be downloaded by:

1. Input the website link in your mobile device browser:

https://unibuying.blob.core.windows.net/apks/BTNotification_K6.apk

or

2. Scan the QR code using a QR code Scanner:

Launching BTNotification

This application allows you to connect to a mobile device and customize your BW09PRO's settings. Also, you can use it to access the connected mobile device's features. On the connected mobile device's Apps screen, tap BTNotification. Some features may not be available depending on the type of connected mobile device.

Connecting a new BW09PRO

At the top of the BTNotification screen, tap the up right-hand corner → Bluetooth Settings → Search for new devices. Disconnect the currently-used BW09PRO and connect another BW09PRO.

Looking Watch

If you misplace the BW09PRO, BTNotification can help you find it. Tap "Looking watch" on the BTNotification screen. The BW09PRO emits sounds and turns on the screen, only if the mobile device and the BW09PRO are connected, and both are on "Sound Mode".

Regulatory & Safety Notices

USA: FEDERAL COMMUNICATIONS COMMISSION (FCC) STATEMENT

This device complies with FCC part 15 FCC Rules.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

• Reorient or relocate the receiving antenna
• Increase the separation between the equipment and receiver
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.

This device meets the FCC requirements for RF exposure in public or uncontrolled environments.

FCC ID: 2AHNH-BW17X629T