



Feature

- ※ High gain
- ※ Omani-directional
- ※ Wide bandwidth

Application

※GSM850/900/DCS/PCS/WCDMA B1/B2/B4/B5/B8


LTE B1/B2/B3/B4/B5/B7/B8/B12/B13/B17/B25/B26/B28/B38/B40/B41/B66

Name and address of the antenna manufacturer	Model number of the antenna
Huizhou SPEED Wireless Technology Co., Ltd. No. SX-01-02, Shangxia District, Dongjiang High-Tech Zone, Huizhou City, Guangdong Province	DIV: SPD-X6836-ANT0 MAIN: SPD-X6836-ANT1 5G Wi-Fi: SPD-X6836-ANT14 3IN1: SPD-X6836-ANT12 2.4G Wi-Fi: SPD-X6836-ANT13


Transmitter Frequency		GSM 850/WCDMA B5/LTE B5/B26: 824 – 849 MHz
		GSM 900/WCDMA B8/LTE B8: 880 – 915 MHz
		DCS /WCDMA B4/LTE B3/B4/B66: 1710 – 1785 MHz
		PCS/WCDMA B2/LTE B2/B25:1850-1910MHz
		WCDMA B1/LTE B1: 1920 – 1980MHz
		LTE B7:2496-2565MHz
		LTE B40:2305-2315MHz&2350-2360MHz
		LTE B38/B41:2565-2645MHz
		LTE B12/B17:699-716MHz
		LTE B13:777-787MHz
		LTE B28:710-755MHz
Receiver Frequency		GSM 850/WCDMA B5/LTE B5/B26: 869 – 894 MHz
		GSM 900/WCDMA B8/LTE B8: 925 – 960 MHz
		DCS/LTE B3: 1805 – 1880 MHz
		WCDMA 4/LTE B4: 2110-2155 MHz
		PCS/WCDMA B2/LTE B2/B25:1930-1990MHz
		WCDMA B1/LTE B1/B66: 2110–2170MHz
		LTE B7:2620-2690MHz
		LTE B40 :2305-2315MHz &2350-2360MHz
		LTE B38/41:2565-2645MHz
		LTE B12/17:729-746MHz
		LTE B13:746-756MHz
		LTE B28:758-803MHz
Antenna Gain	ANT1	GSM 850/WCDMA B5/LTE B5/B26: -5.7dBi
		GSM 900/WCDMA B8/LTE B8: -3.9dBi
		DCS /WCDMA B4/LTE B3/B4/B66: -1.65dBi
		PCS/WCDMA B2/LTE B2/B25: -0.2dBi
		WCDMA B1/LTE B1: -0.2dBi
		LTE B7/B38/B41: -0.51dBi
		LTE B40: -1.83dBi &-1.62dBi
		LTE B12/B13/B17/B28:-4.9dBi
	ANT12	Bluetooth, 2.4G Wi-Fi: -1.22dBi
	ANT14	5G Wi-Fi:-0.9dBi
	ANT13	2.4G Wi-Fi:-2.21dBi

※ Antenna Gain


ANT1

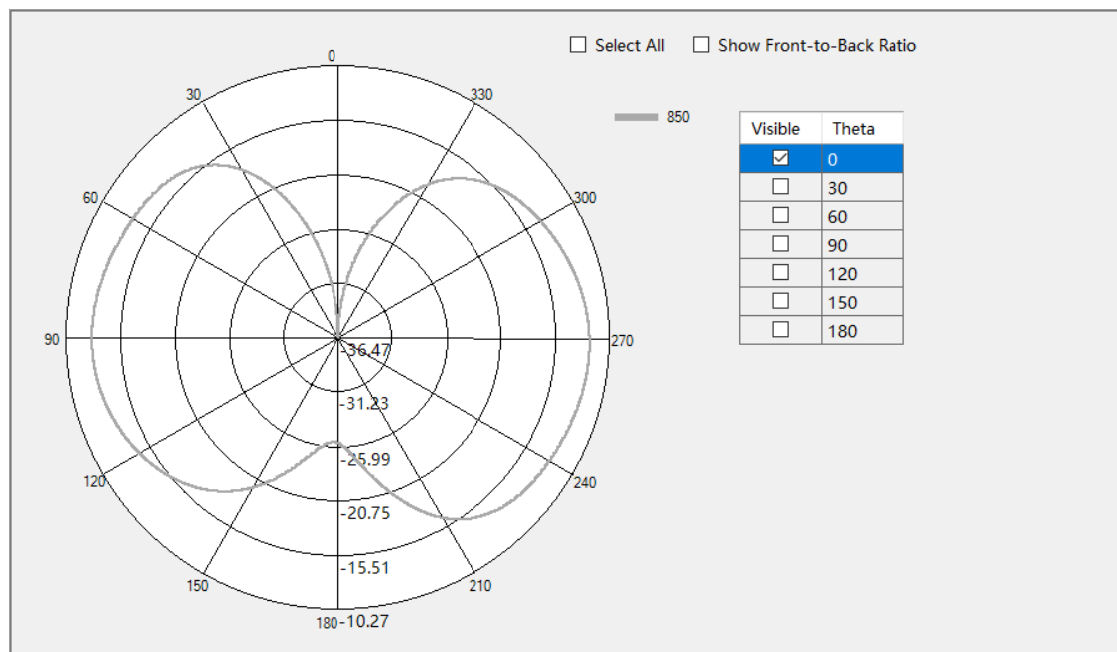


GSM850 / WCDMA B5 / LTE B5/B26 $\Phi=0^\circ$

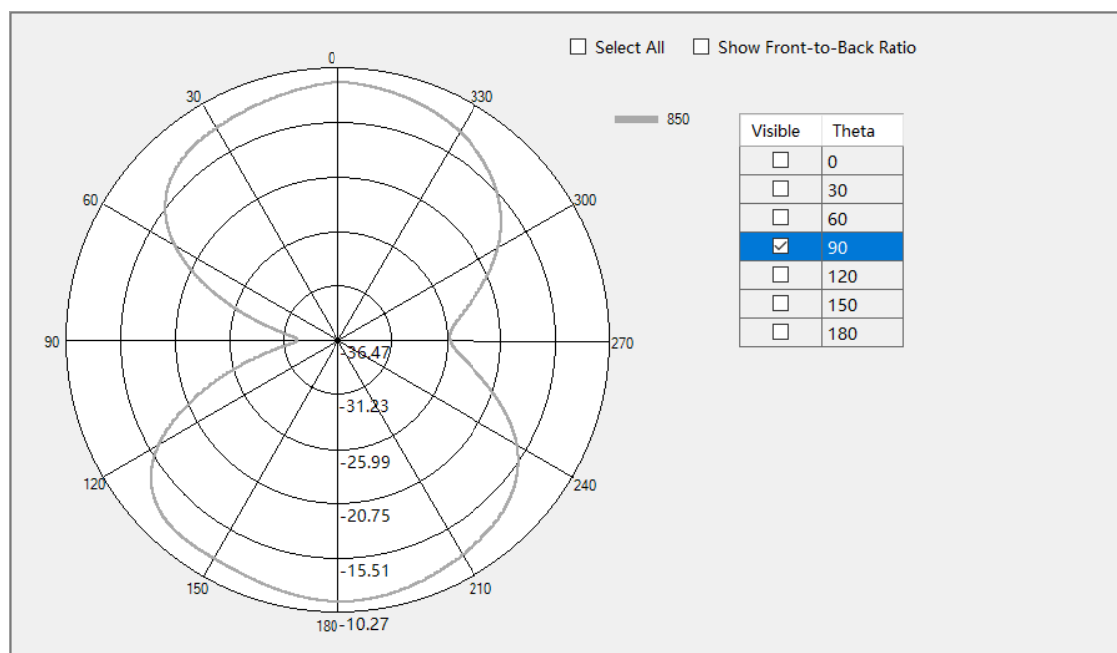


GSM850 / WCDMA B5 / LTE B5/B26 $\Phi=90^\circ$

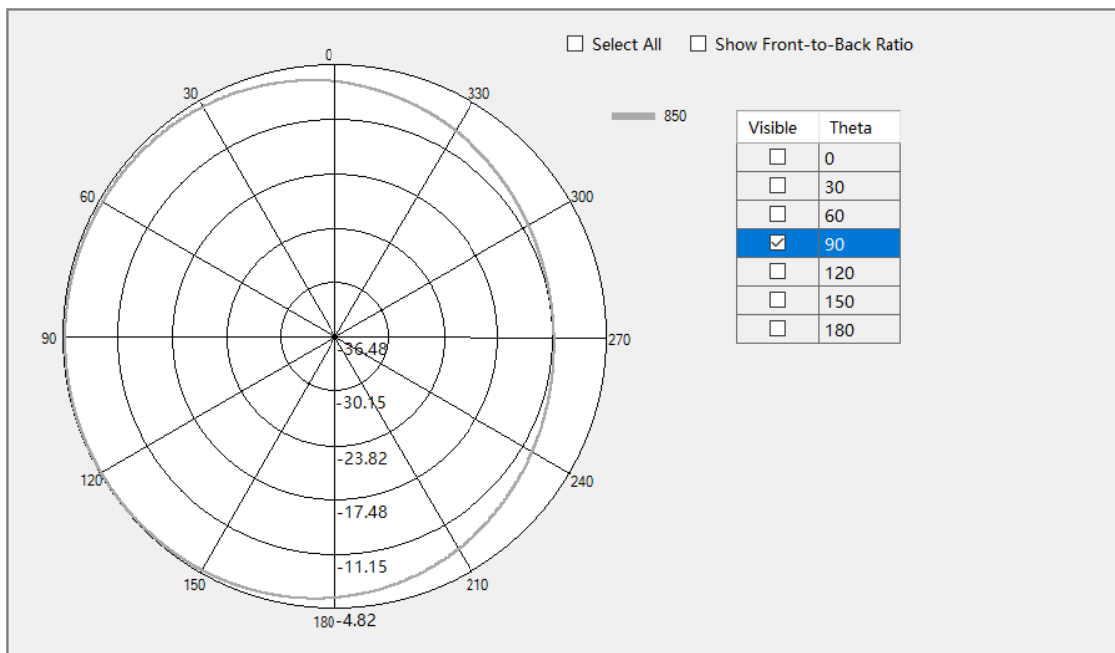


GSM850 / WCDMA B5 / LTE B5/B26 Theta=90deg

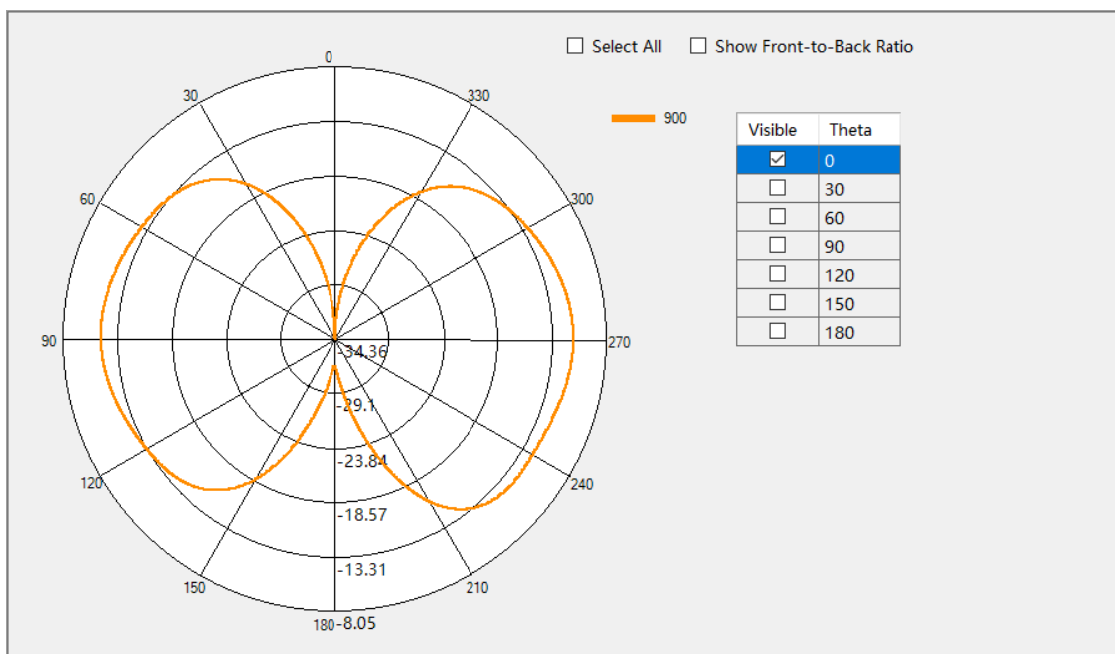


LTE B8 G900 W8 Phi=0deg

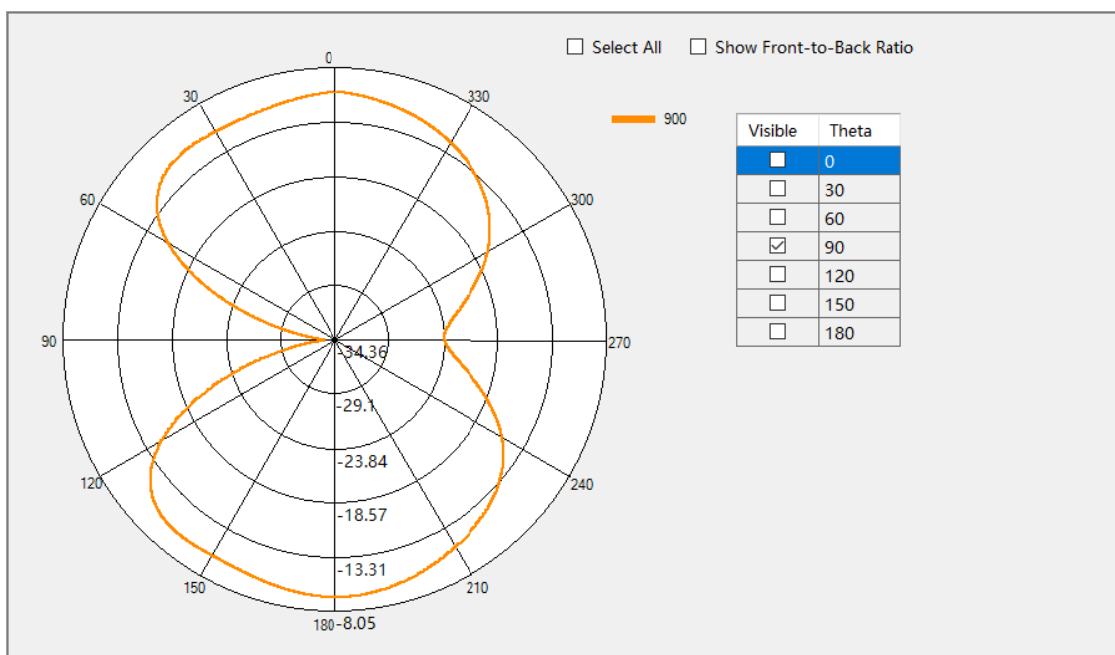


LTE B8 G900 W8Phi=90deg

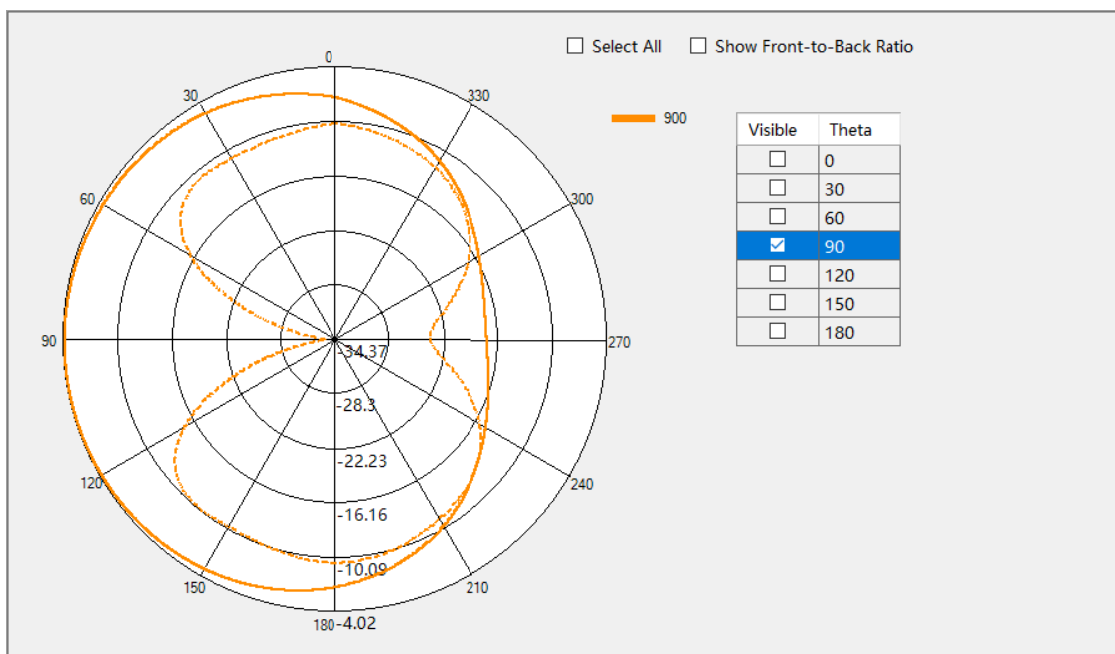


LTE B8 G900 W8 Theta=90deg

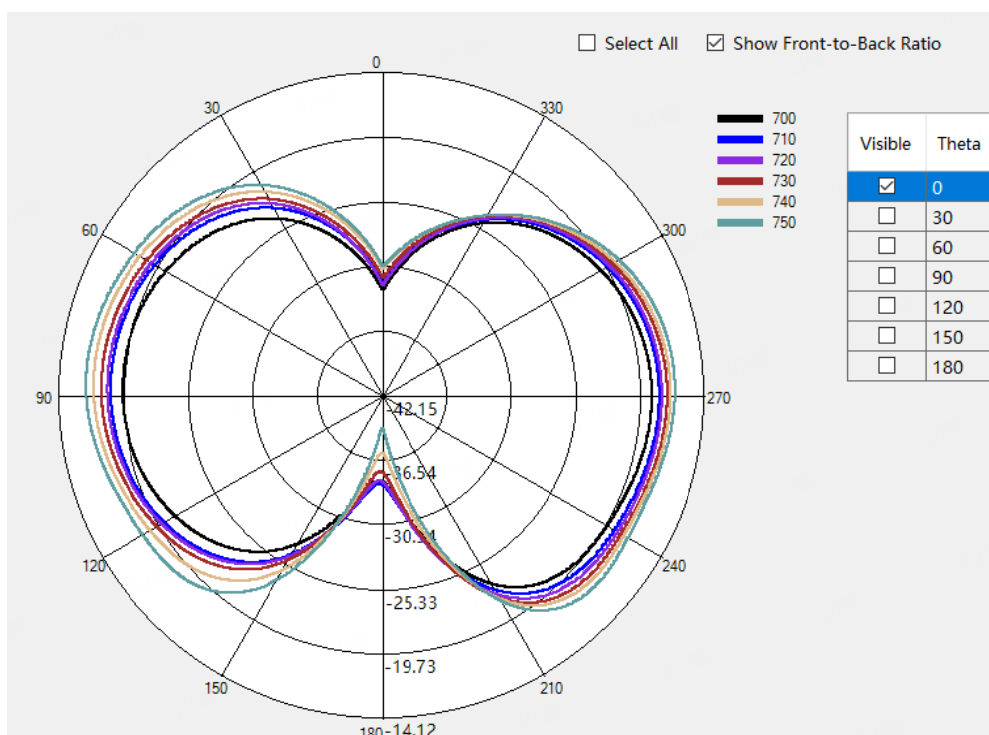


B12 B17 Phi=0deg

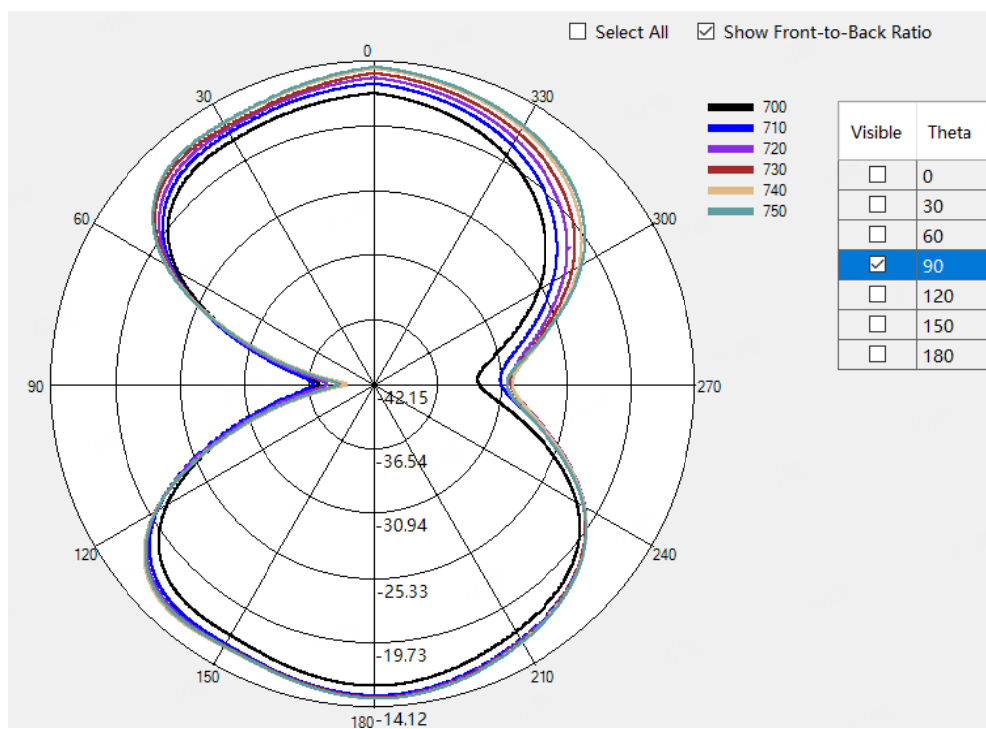


B12 B17 Phi=90deg

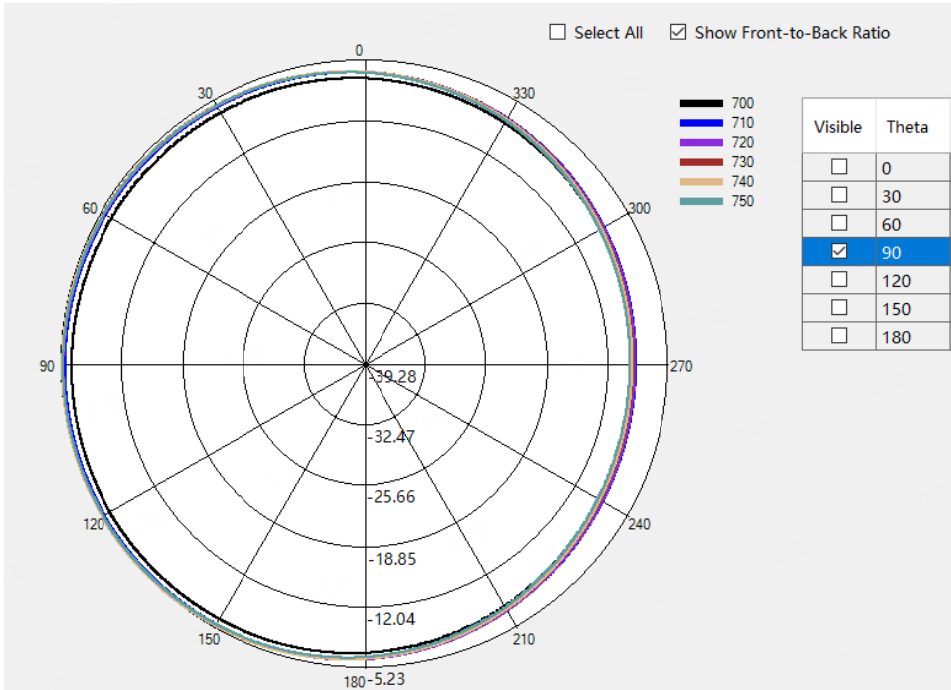


B12 B17 Theta=90deg

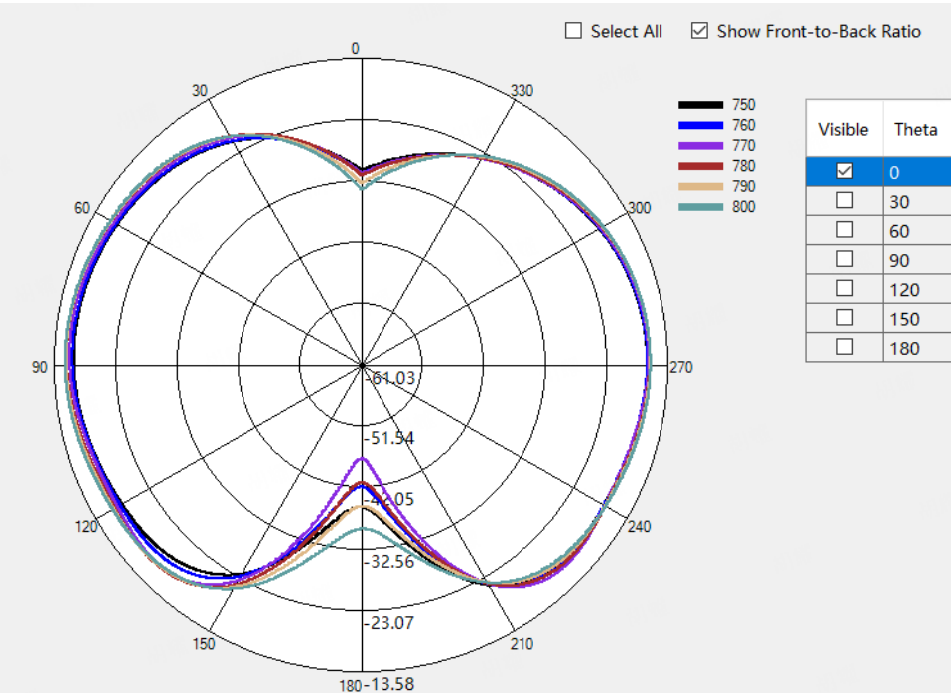


B13 Phi=0deg

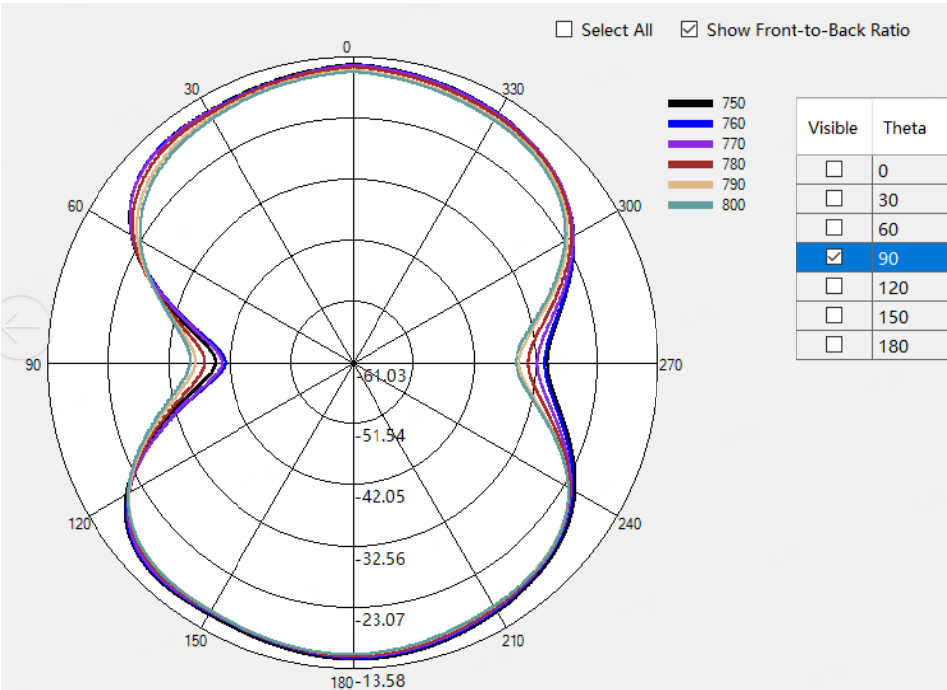


B13 Phi=90deg

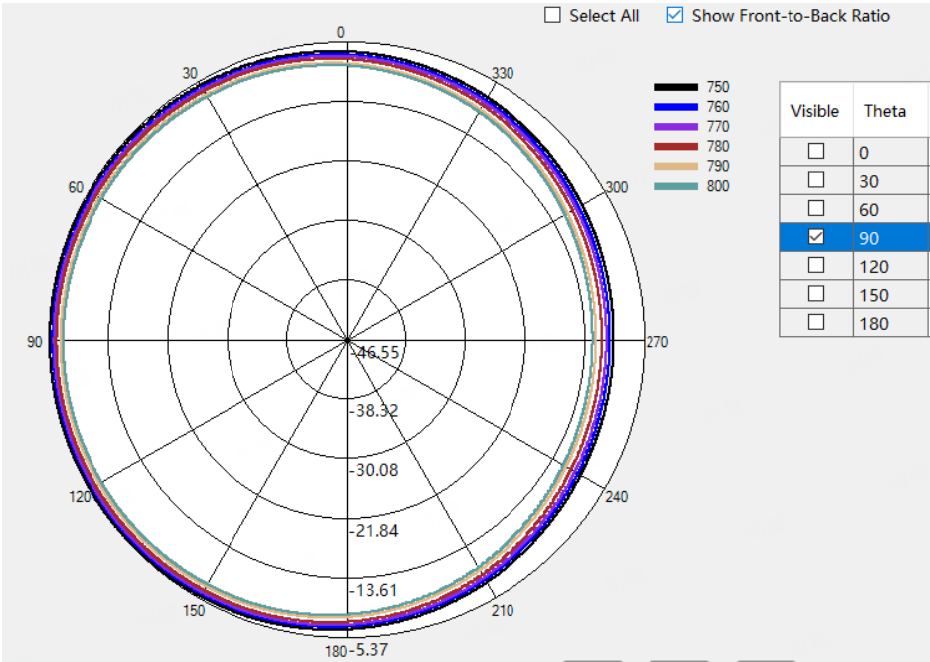


B13Theta=90deg

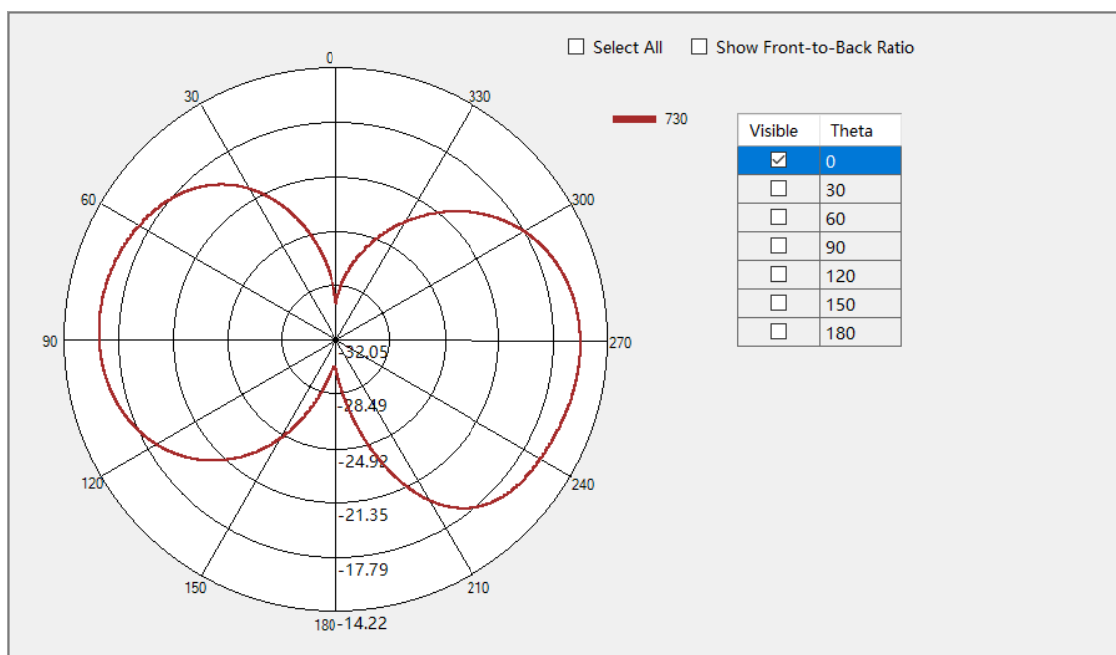


LTE B28 Phi=0deg

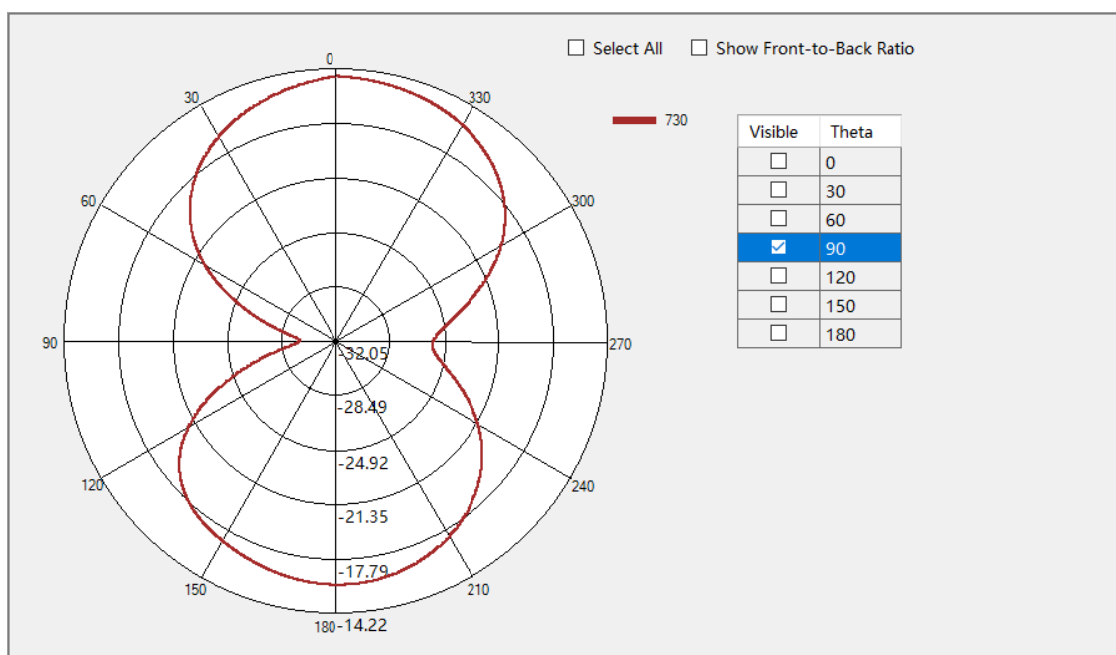


LTE B28 Phi=90deg

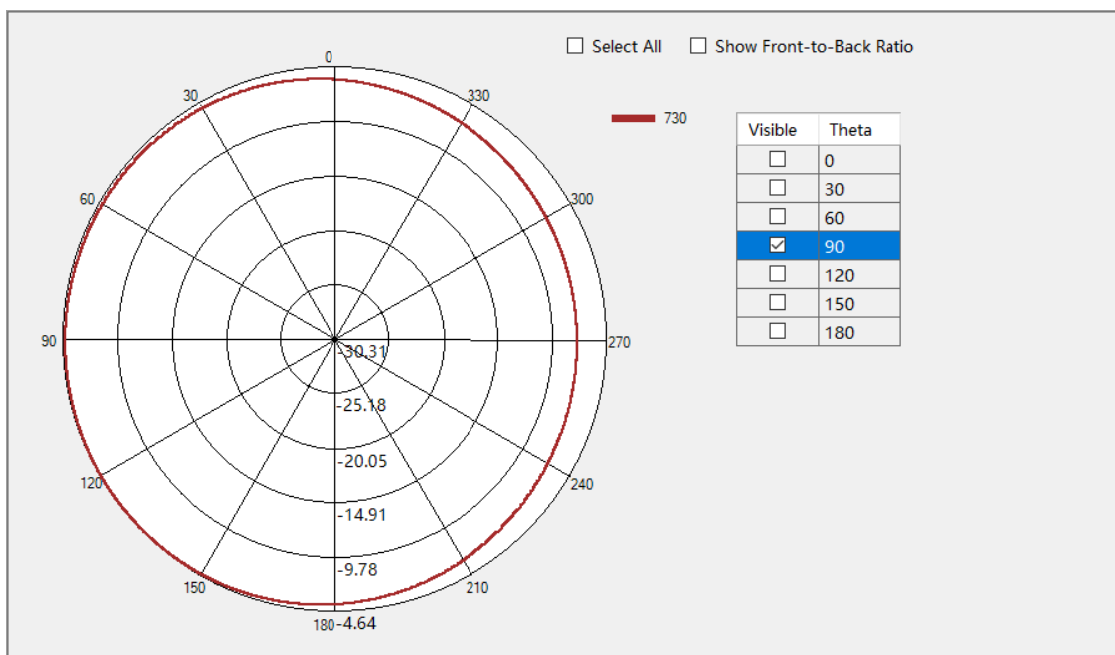


LTE B28 Theta=90deg

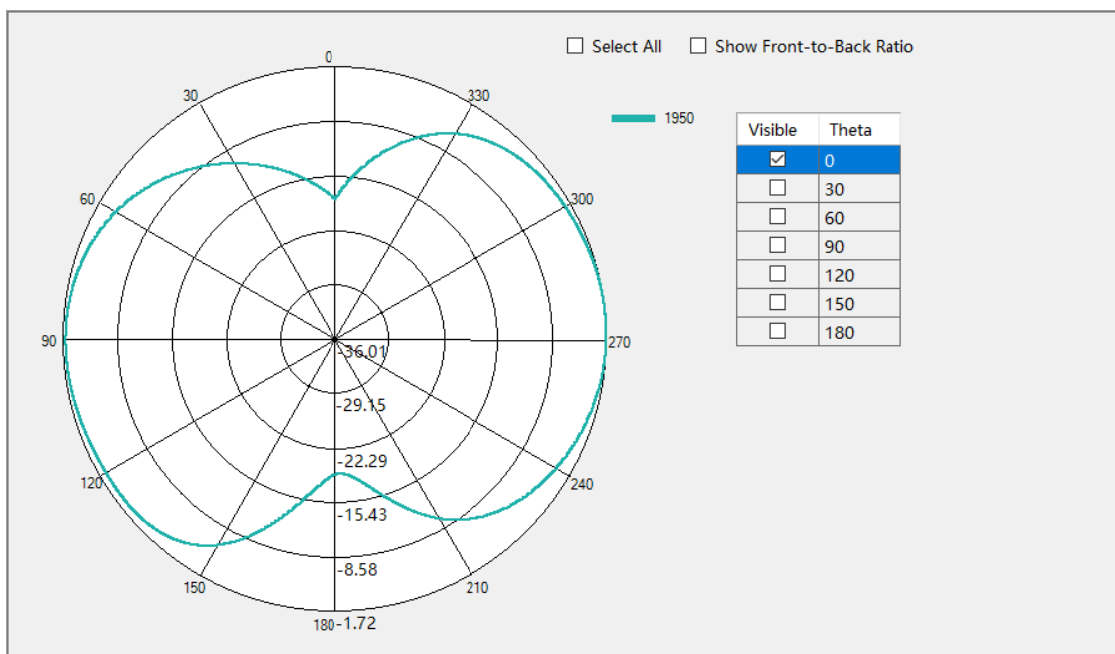


LTE B1 W1 Phi=90deg

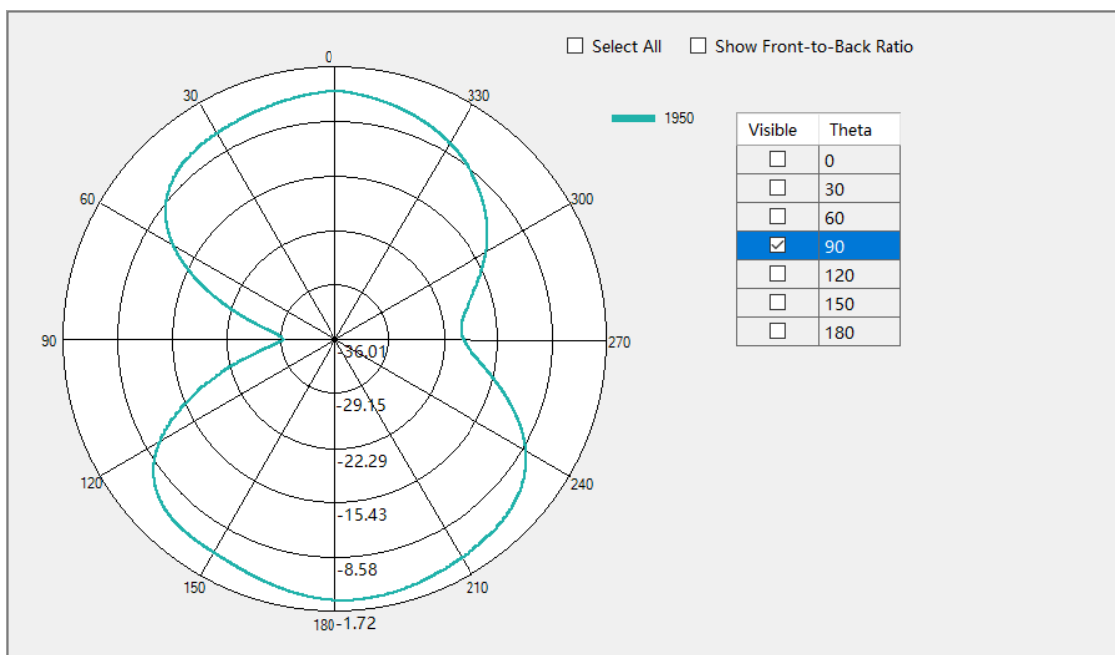


LTE B1 W1 Phi=90deg

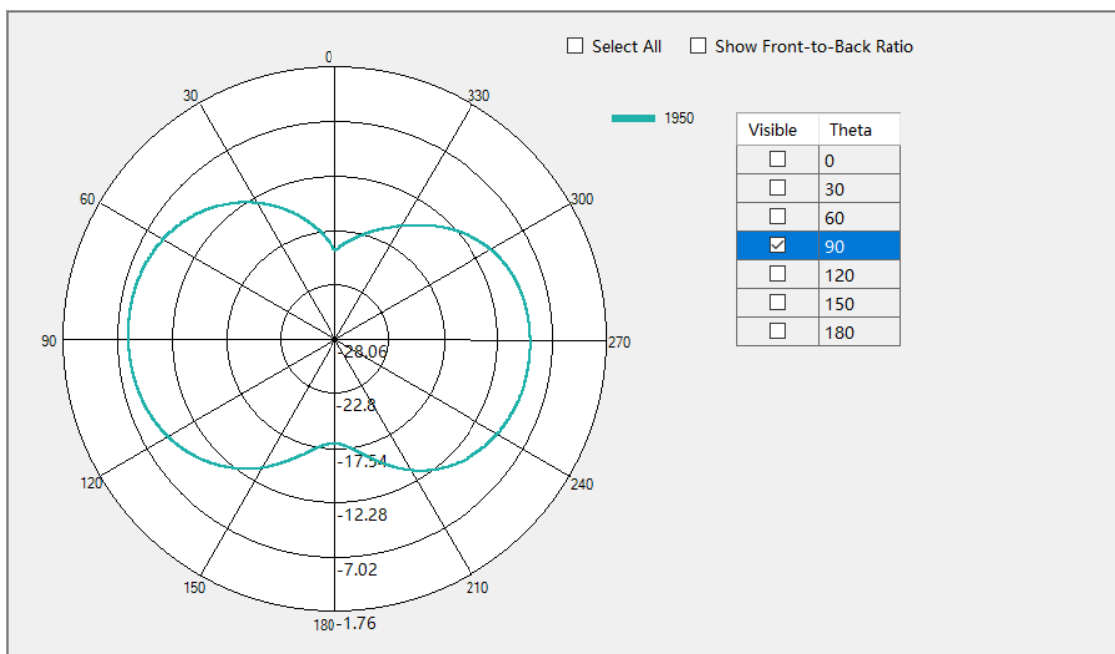


LTE B1 W1 Theta=90deg

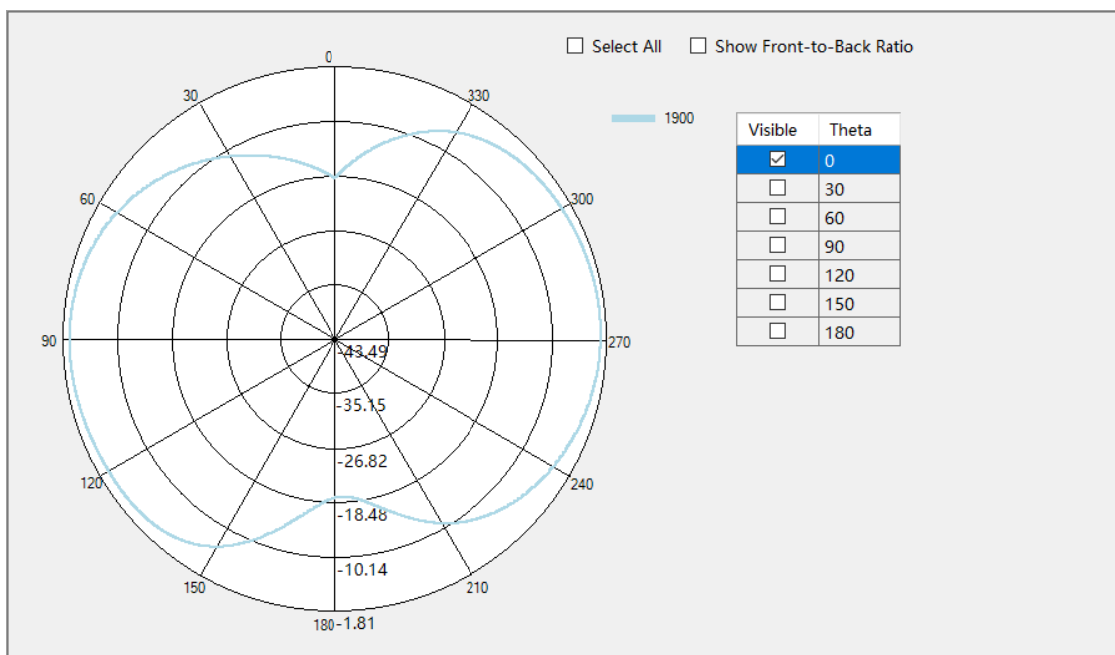


LTE B2/B25 G1900 W2 Phi=0deg

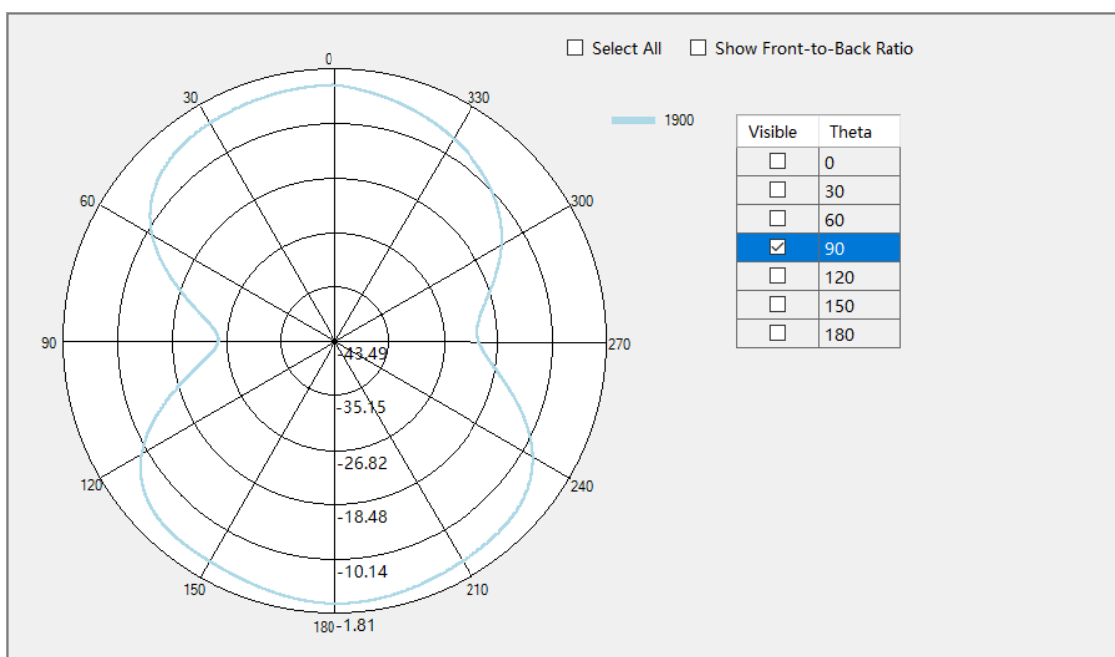


LTE B2/B25 G1900 W2 Phi=90deg

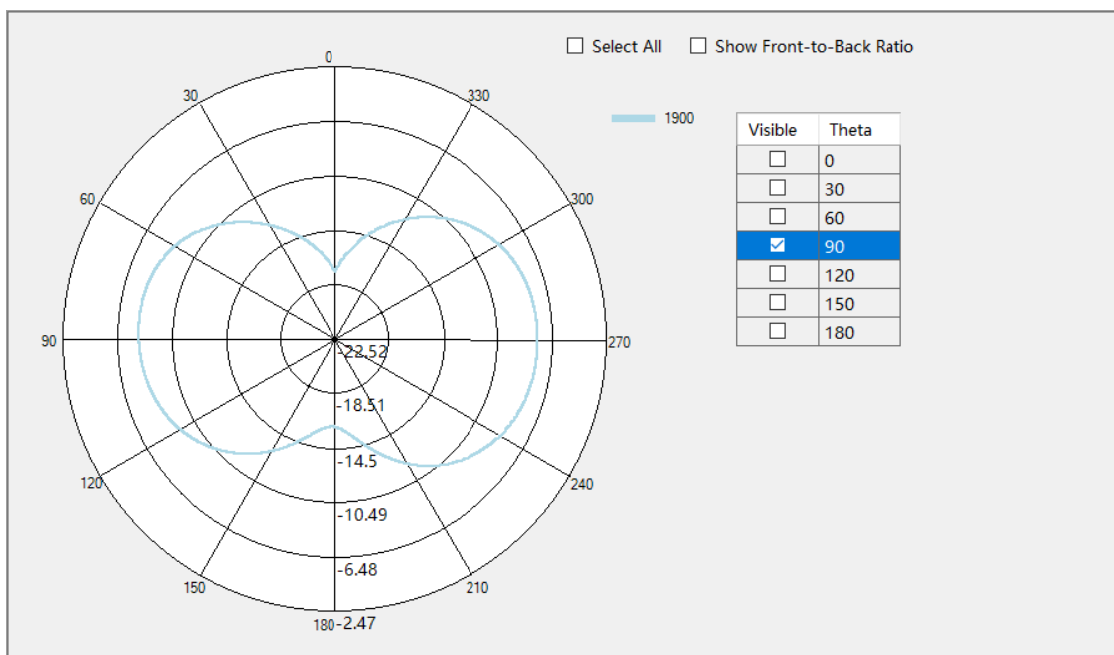


LTE B2/B25 G1900 W2 Theta=90deg

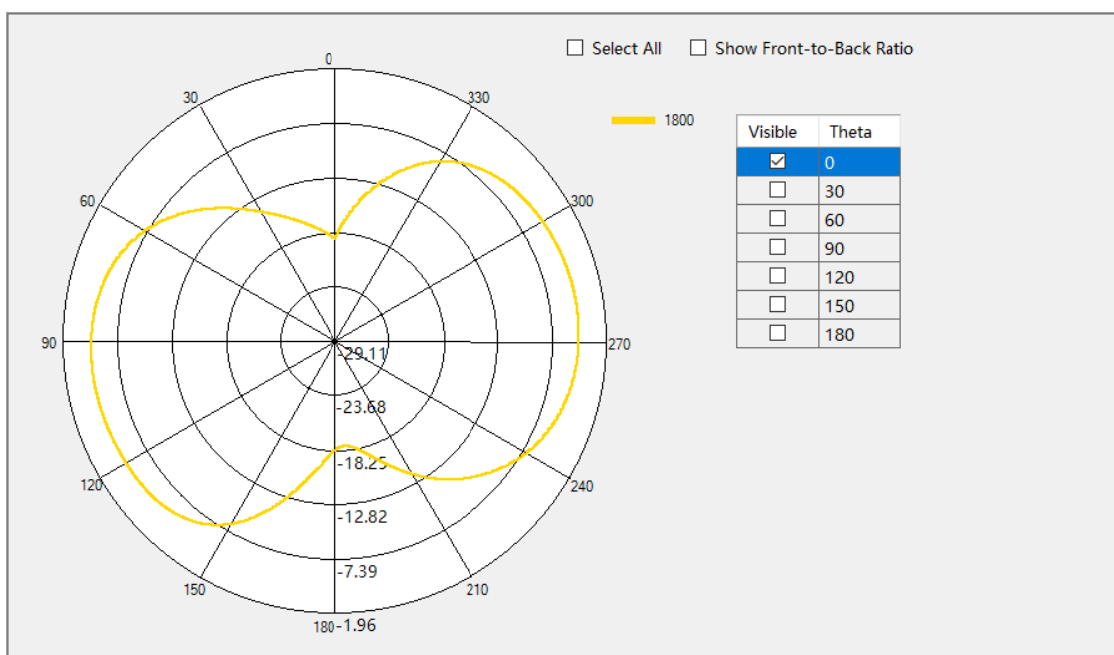


LTE B3B4 B66 G1800 W4 Phi=0deg

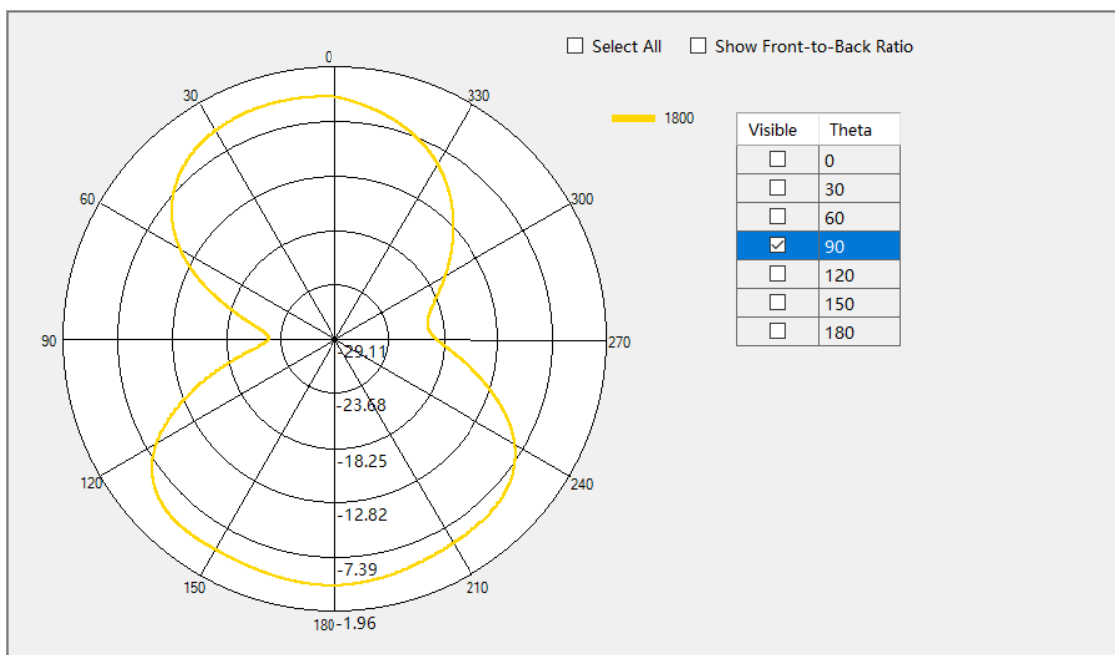


LTE B3B4 B66 G1800 W4 Phi=90deg

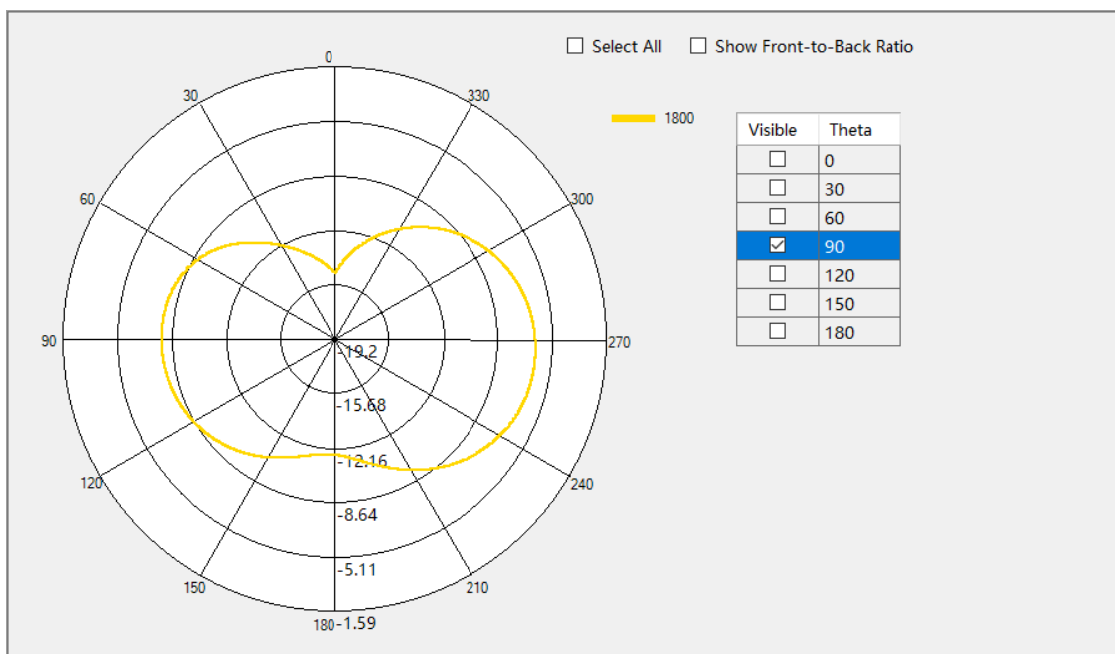


LTE B3 B4 B66 G1800 W4 Phi=90deg

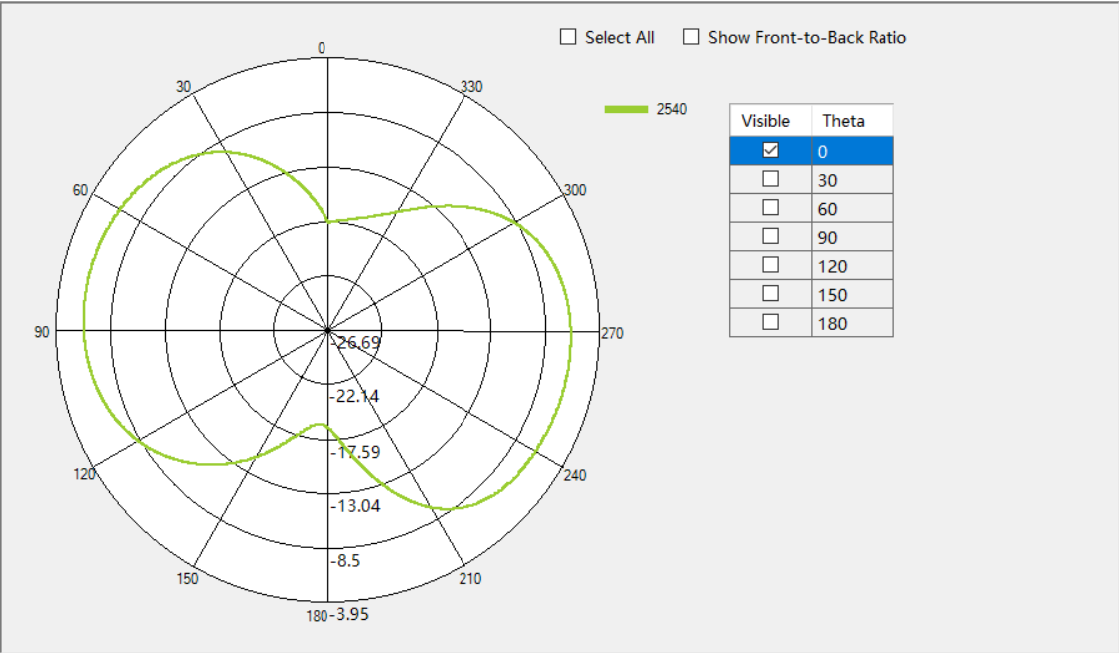


LTE B7 Phi=0deg

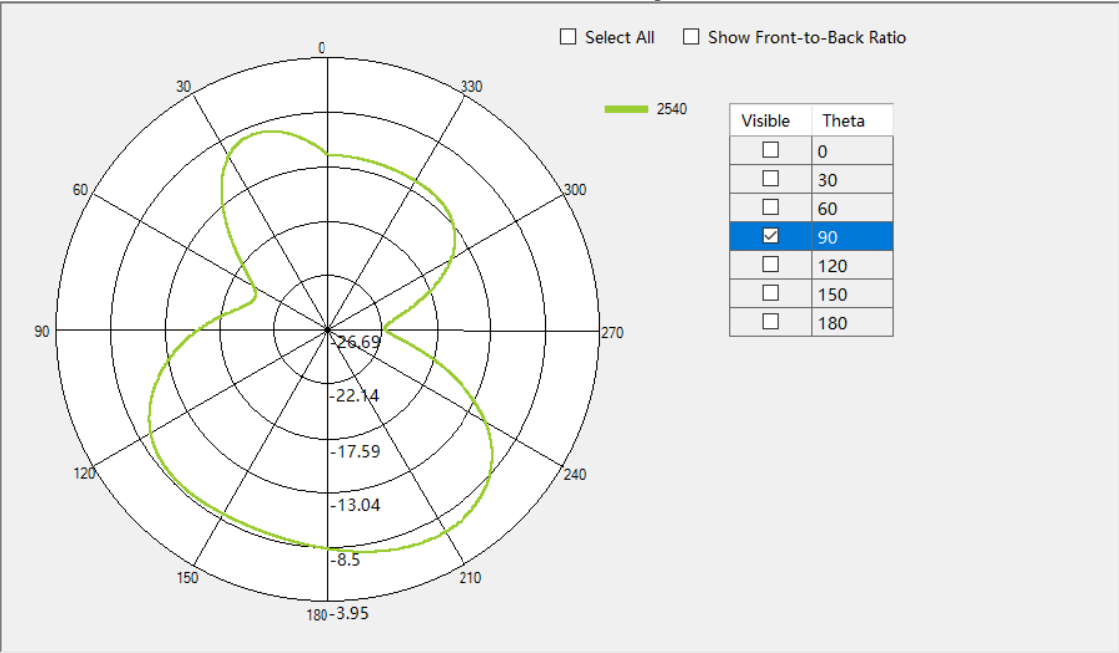


LTE B7 Phi=90deg

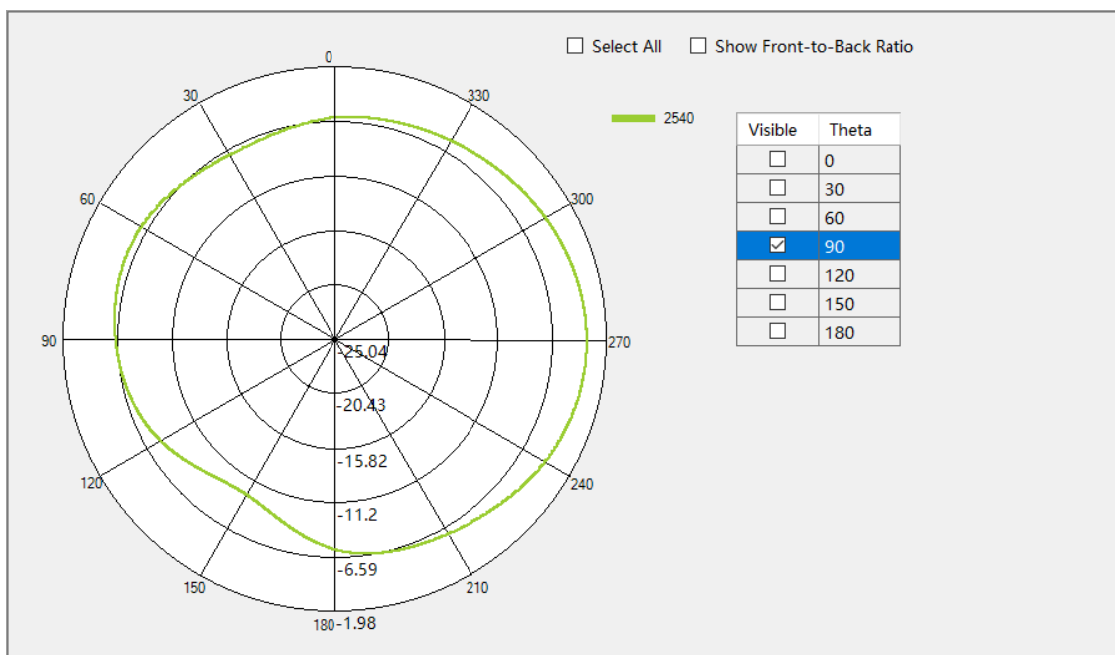


LTE B7 Theta=90deg

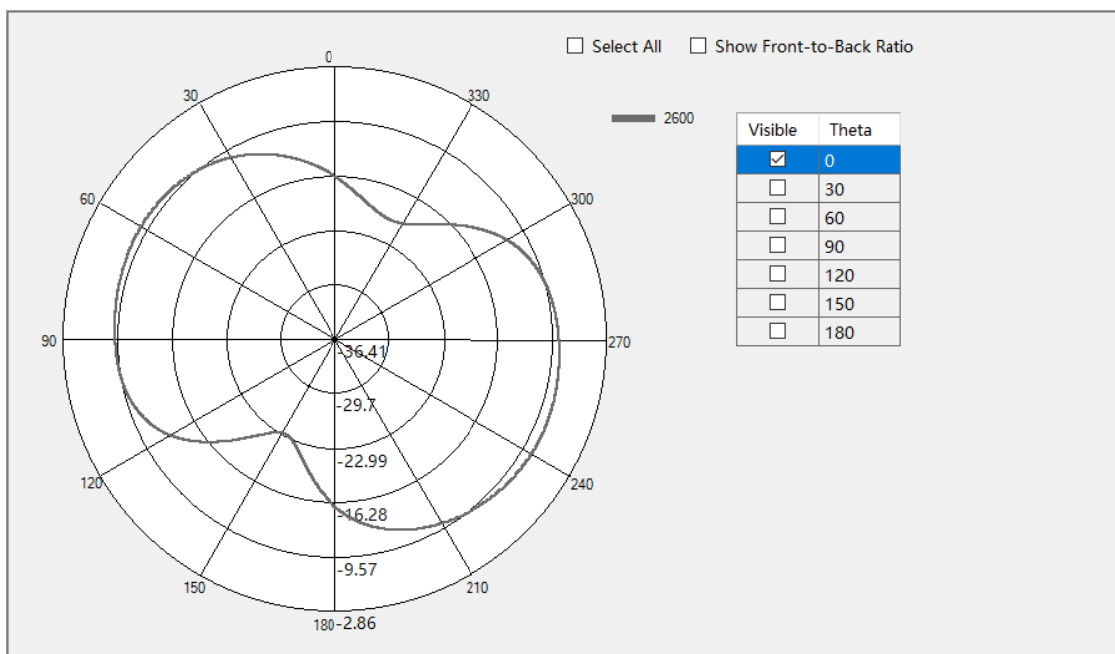


LTE B38 Phi=0deg

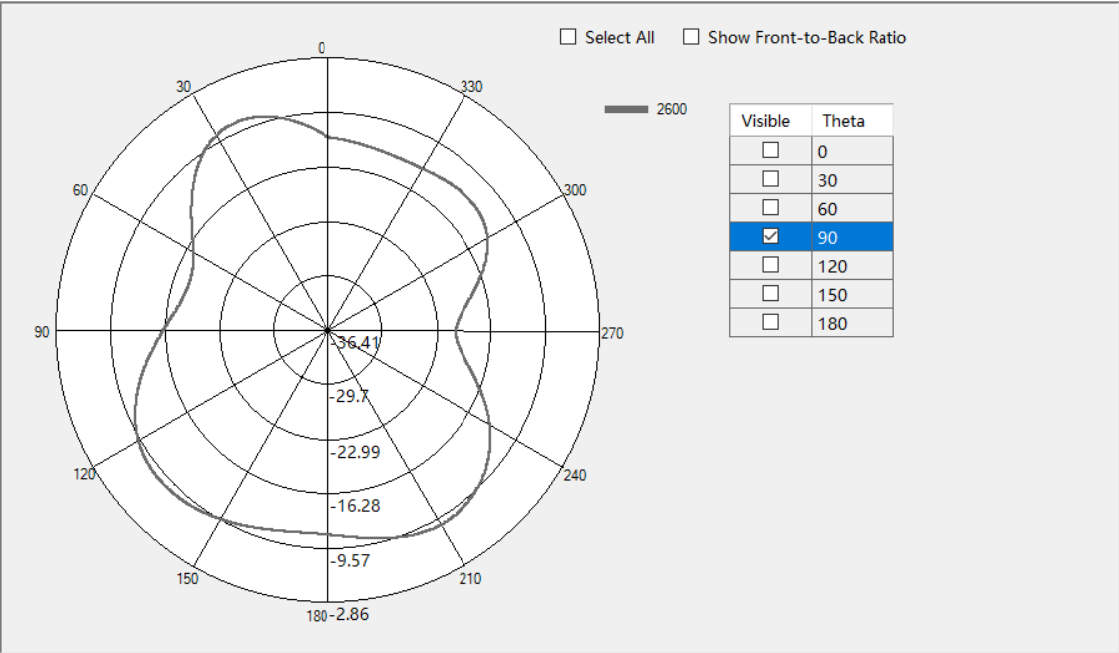


LTE B38 Phi=90deg

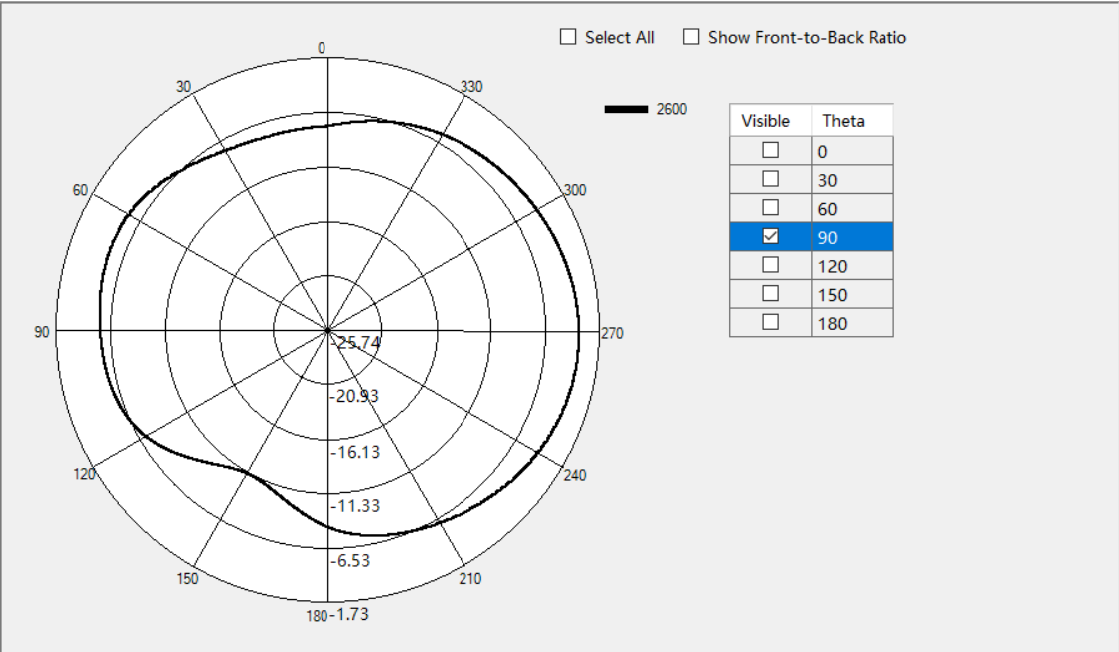


LTE B38 Theta=90deg

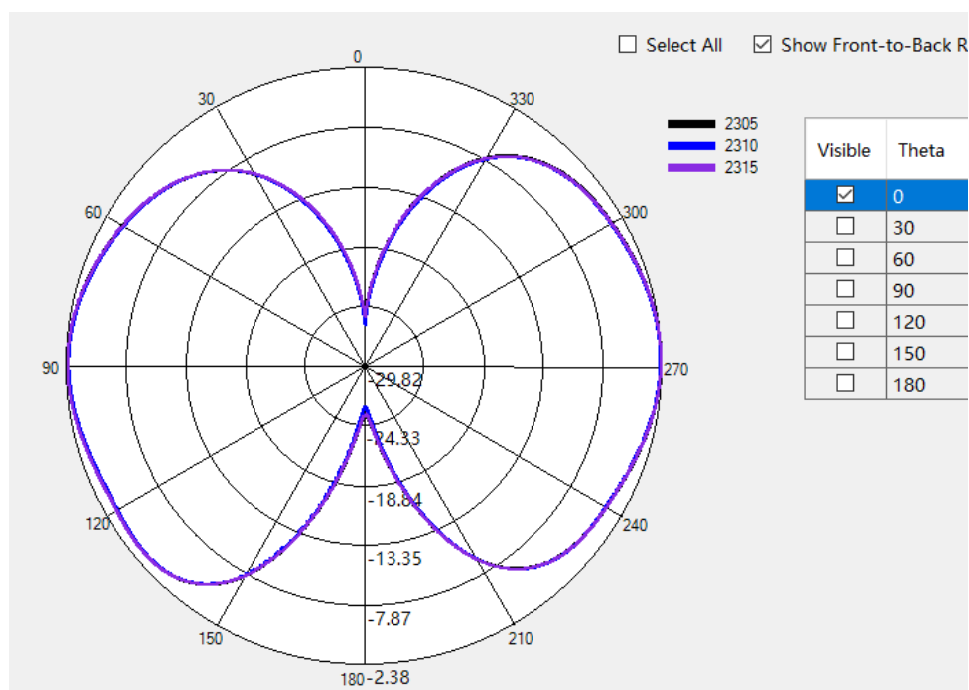


LTE B402305-2315 Phi=0deg

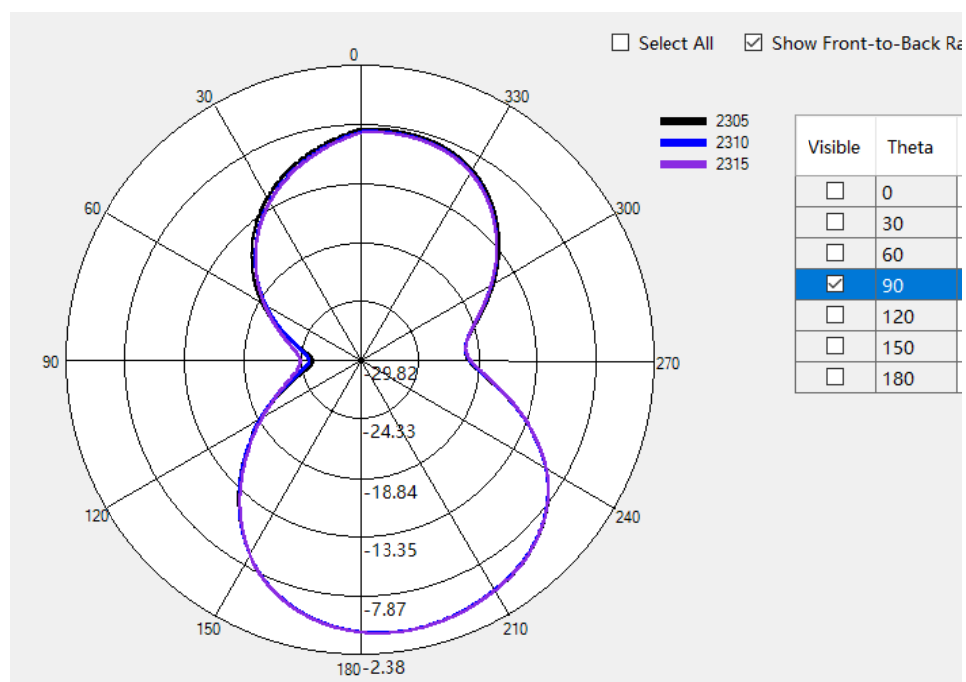


LTE B40 2305-2315 Phi=90deg

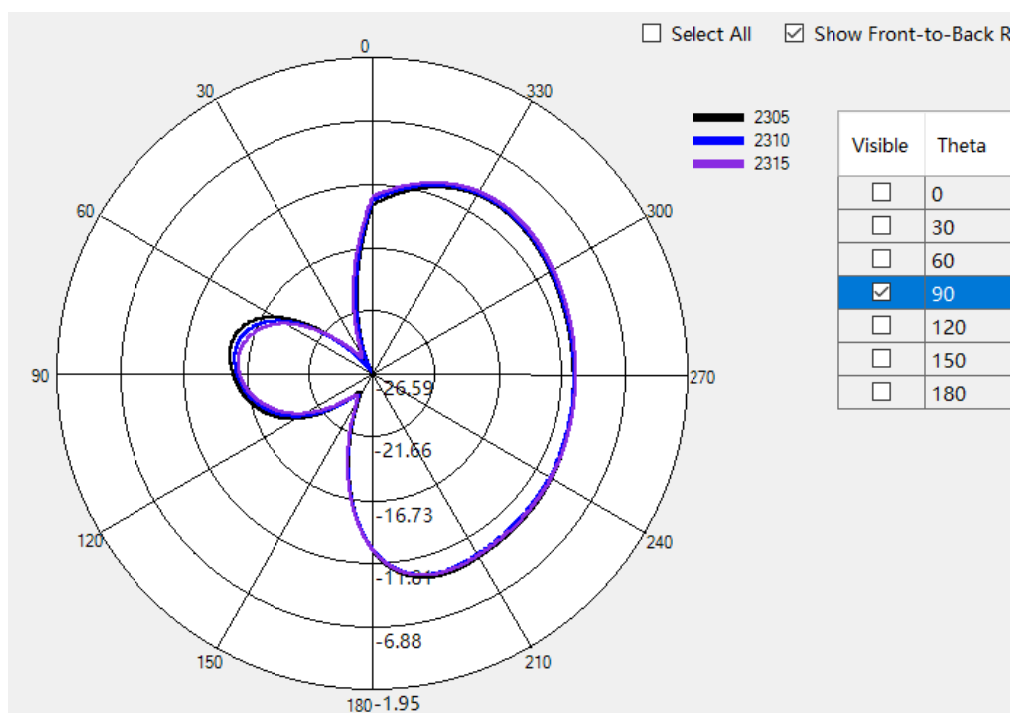


LTE B40 2305-2315 Theta=90deg

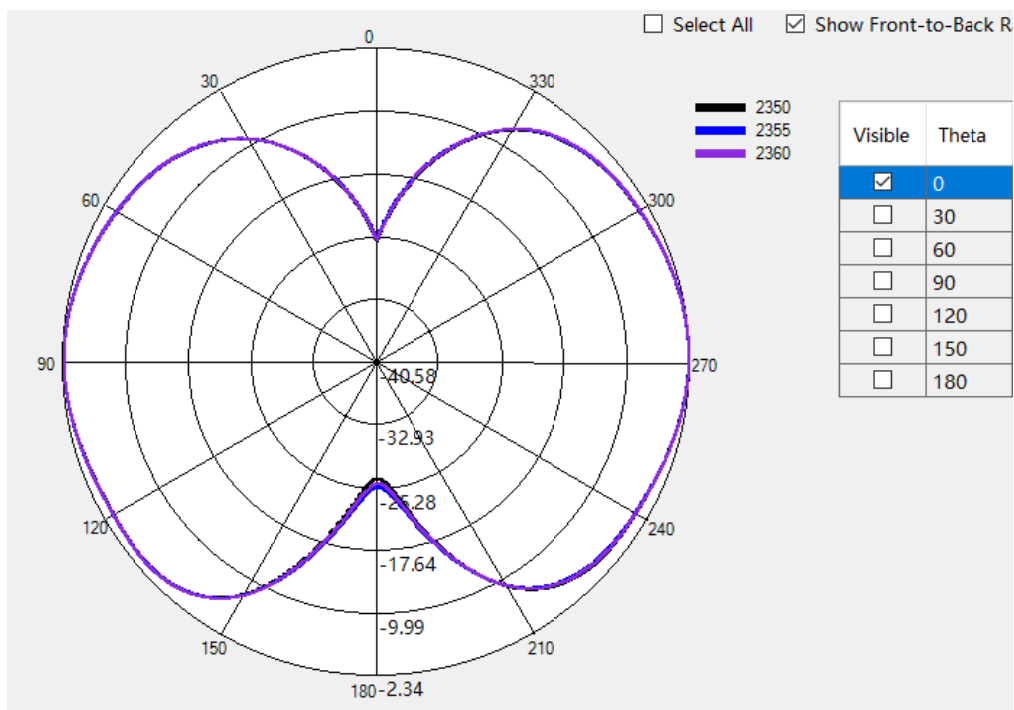


LTE B40 2350-2360 Phi=0deg

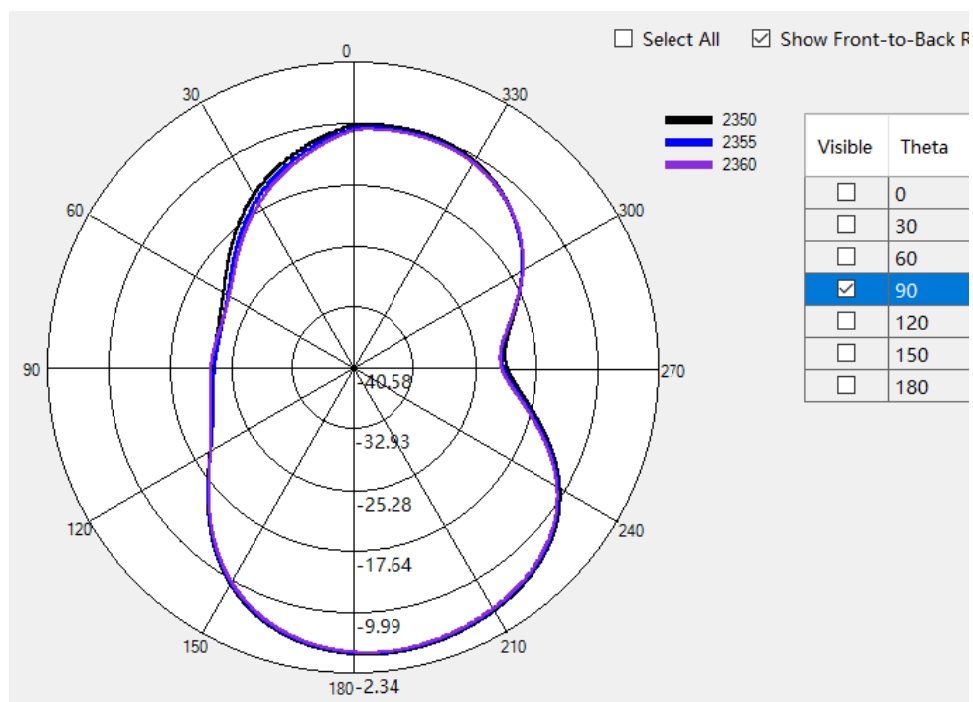


LTE B40 2350-2360 Phi=90deg

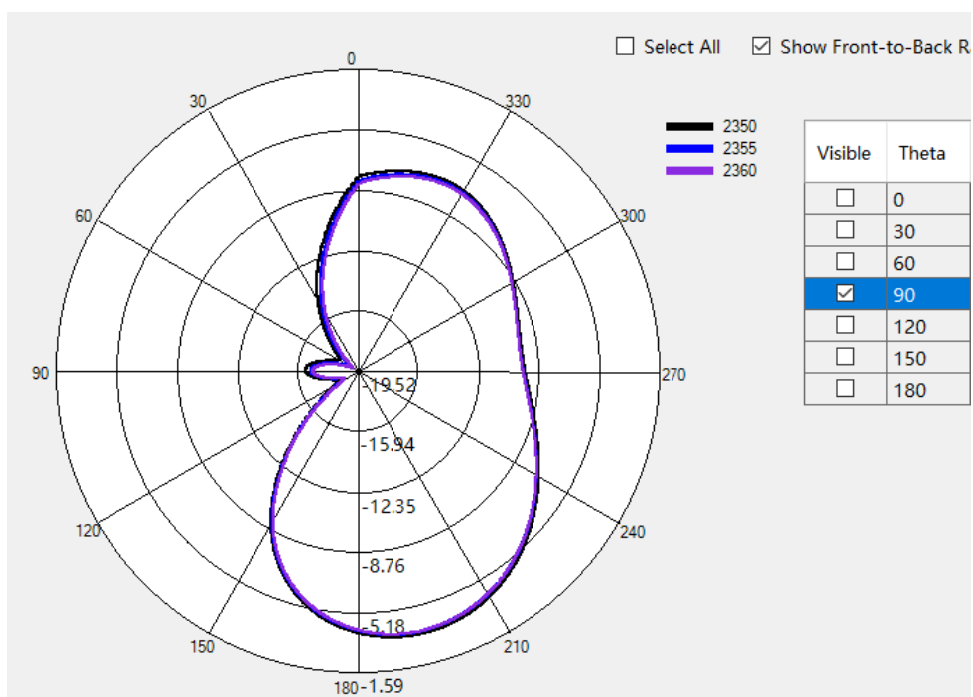


LTE B40 2350-2360 Theta=90deg

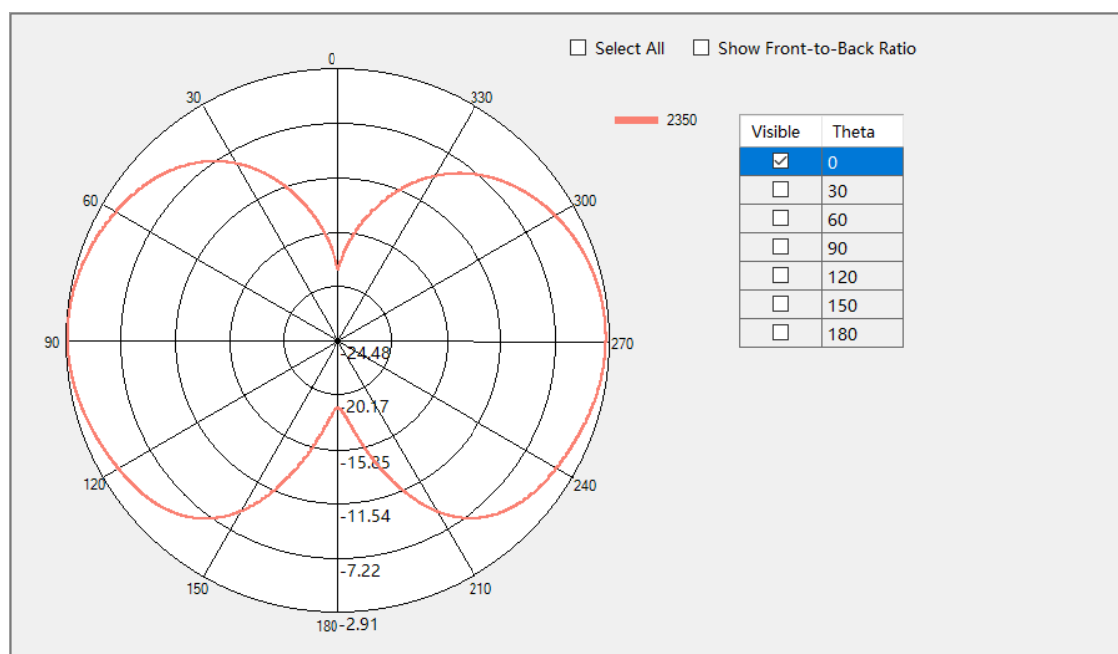

LTE B41 Phi=0deg

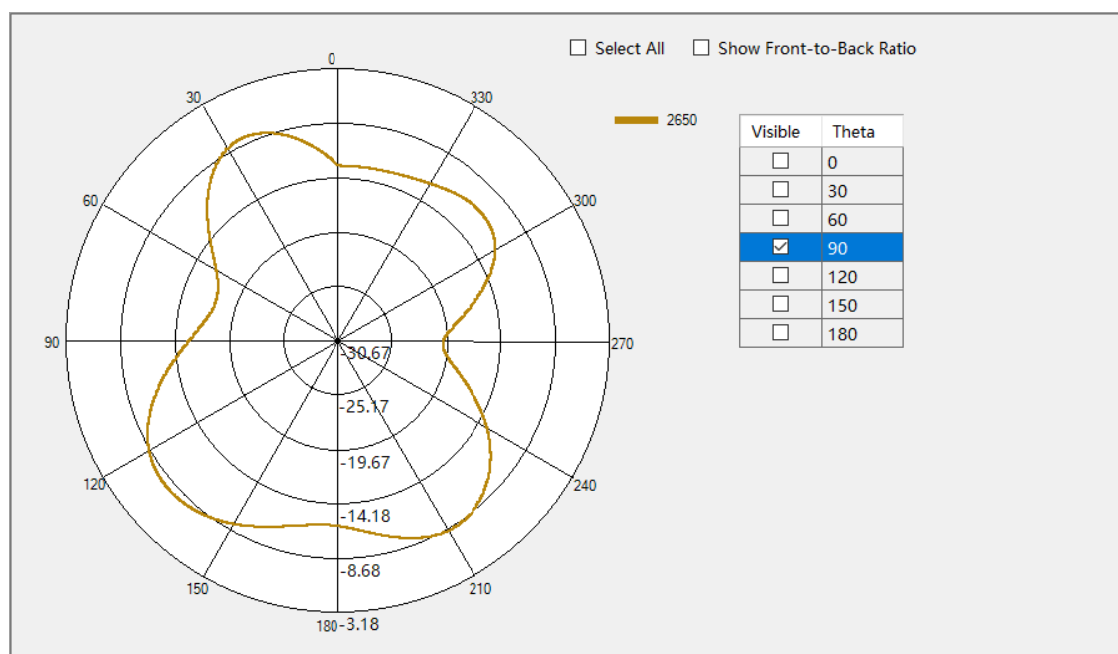


LTE B41 Phi=90deg

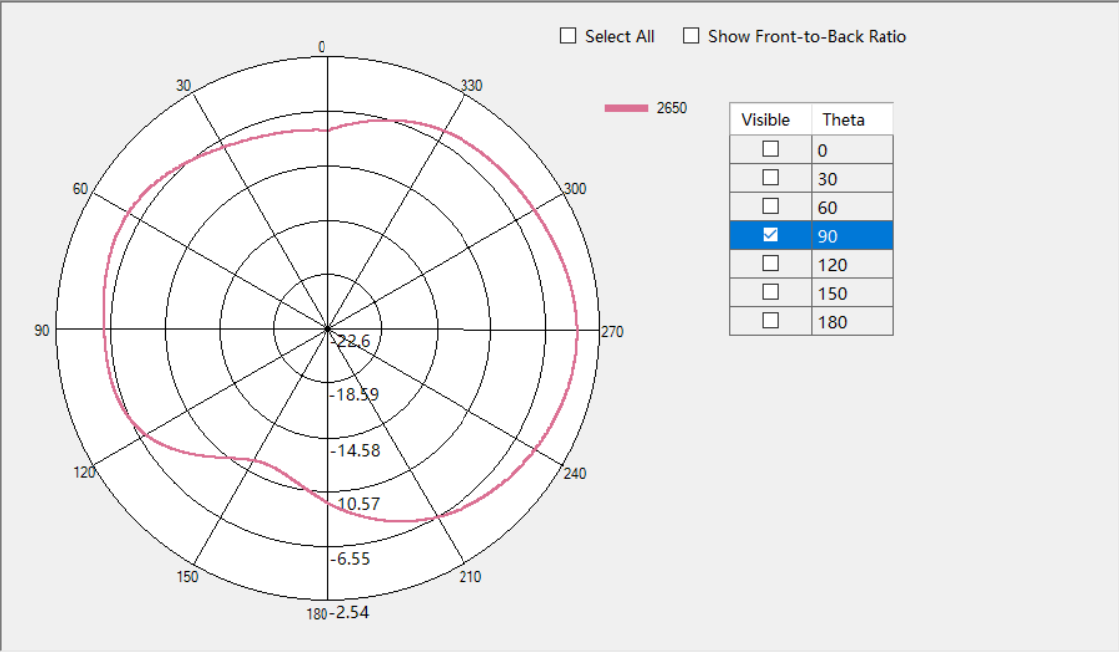


LTE B41 Theta=90deg


ANT 12

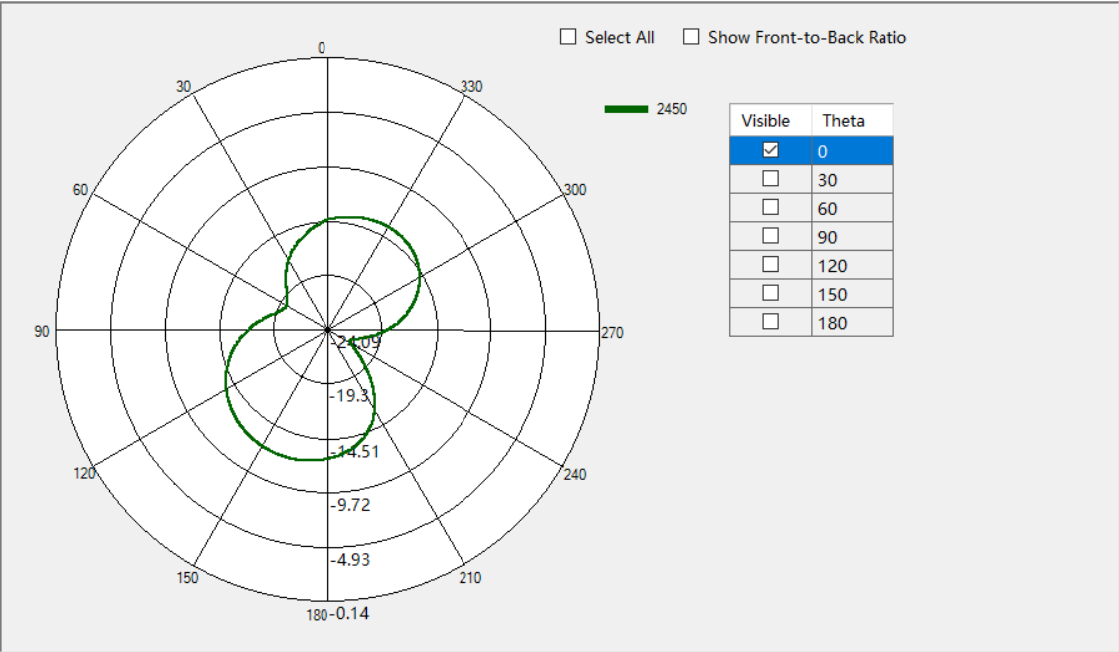

2.4G Phi=0deg

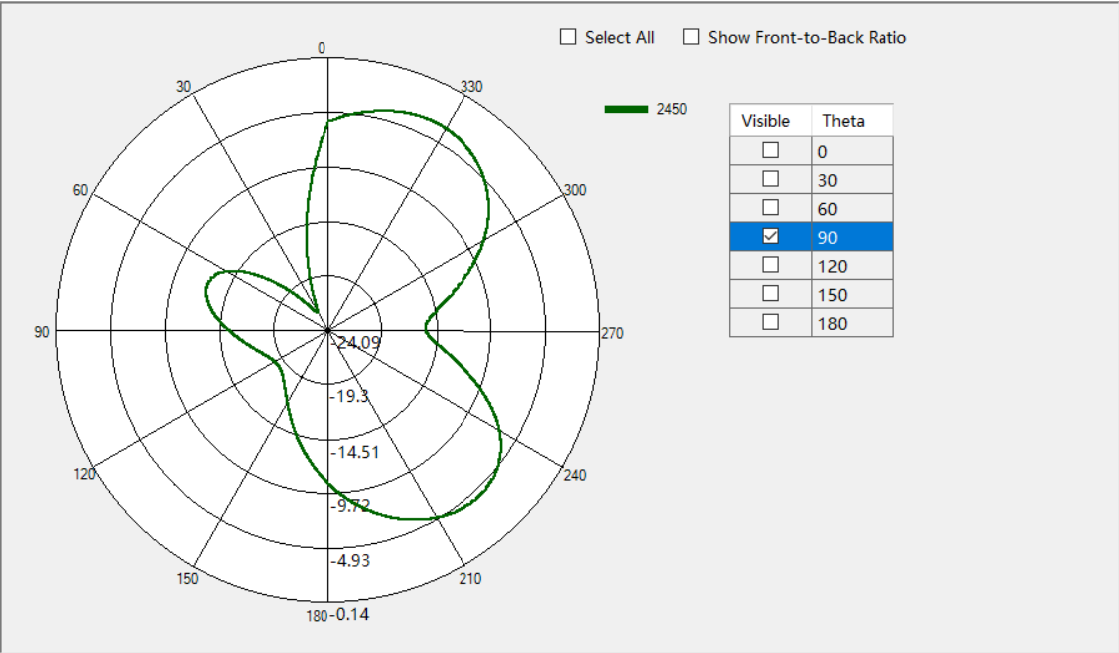


2.4GPhi=90deg

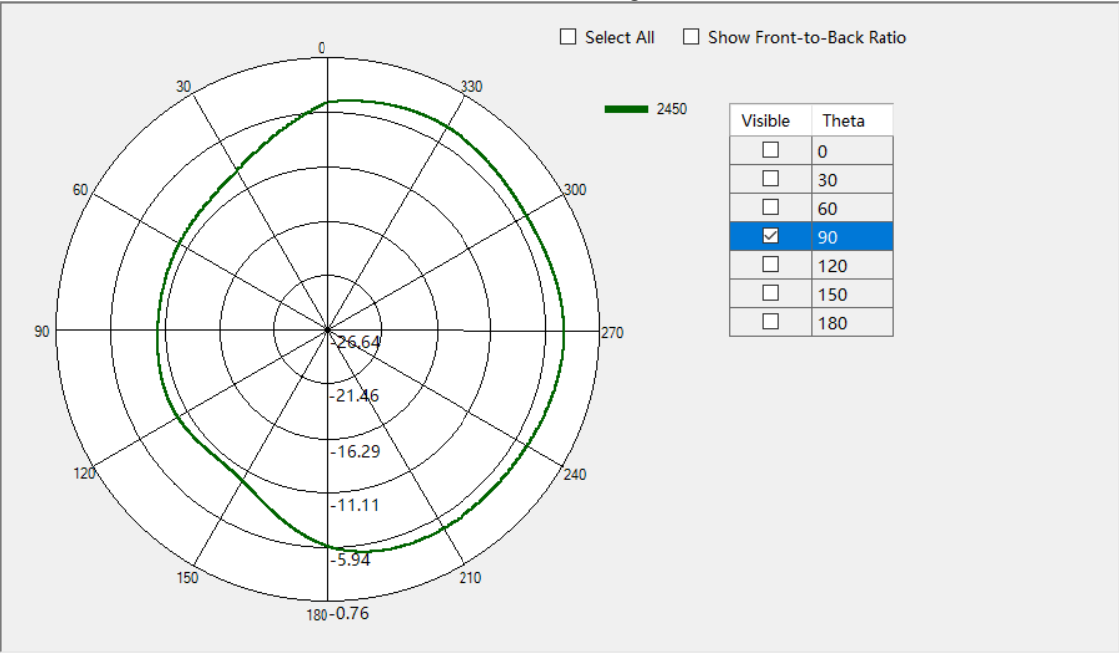


2.4G Theta=90deg


ANT 13

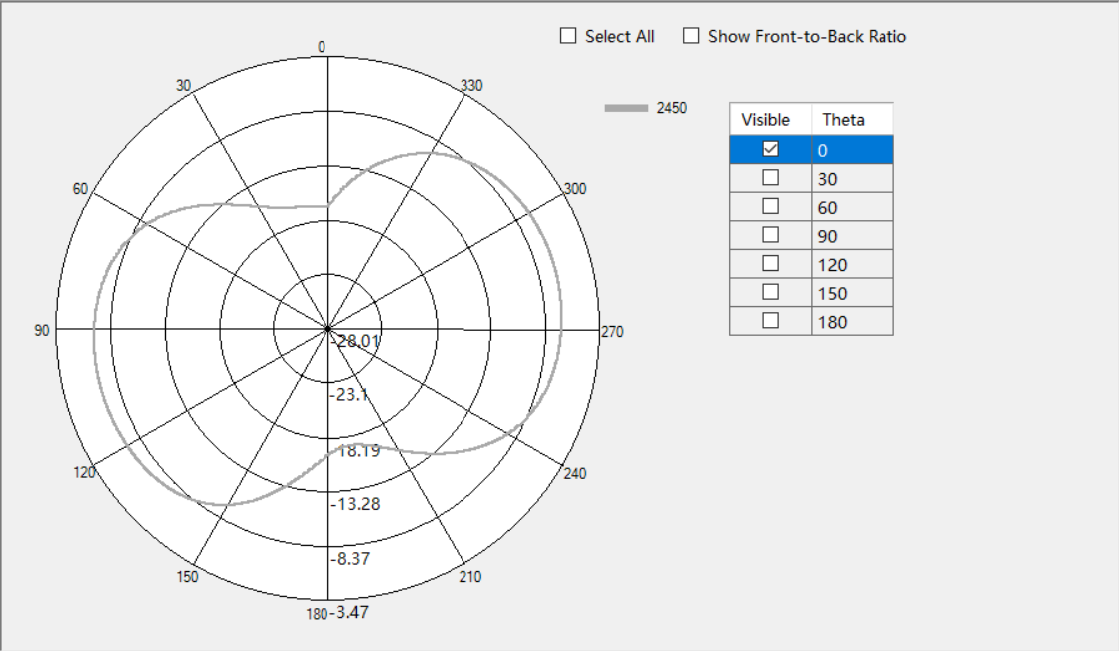

2.4G Phi=0deg

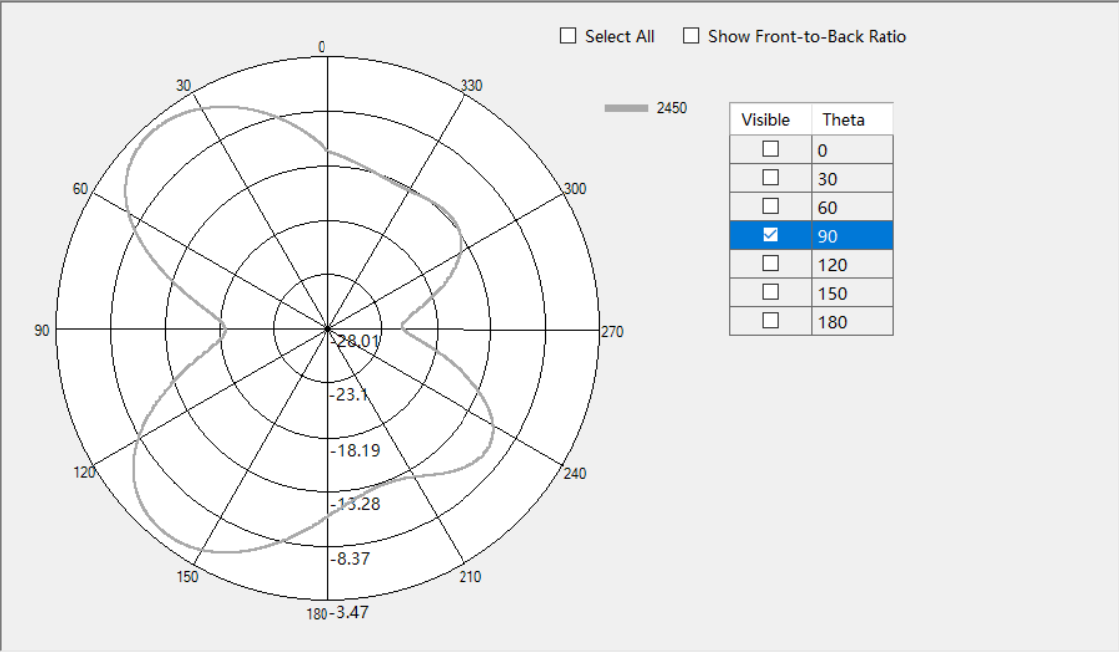


2.4G Phi=90deg

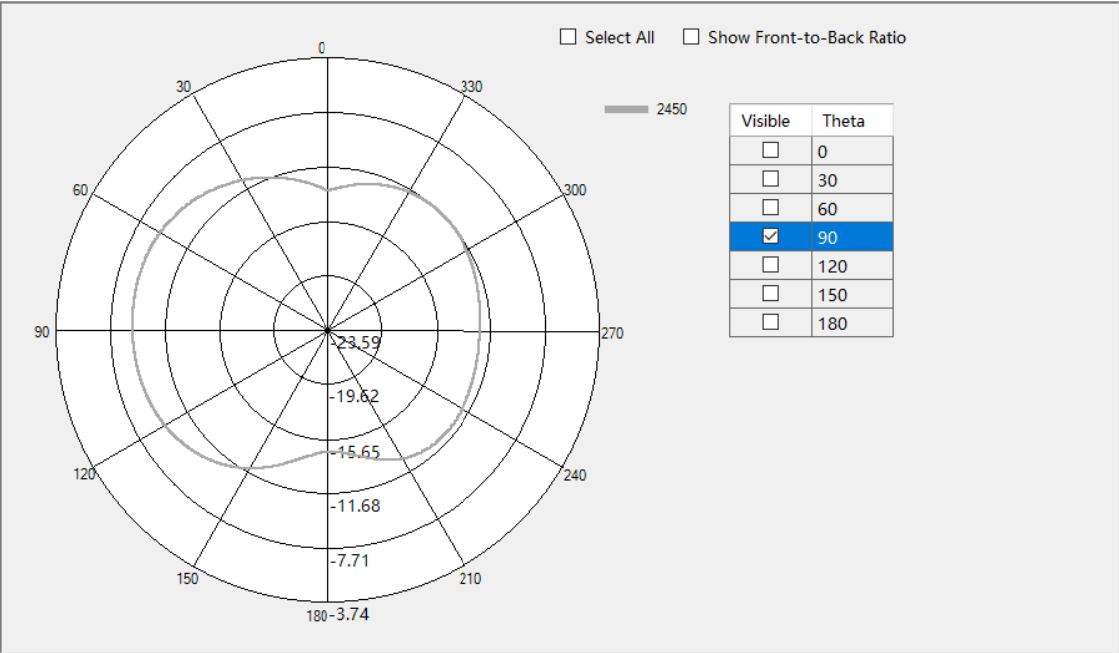


2.4G Theta=90deg


ANT 14

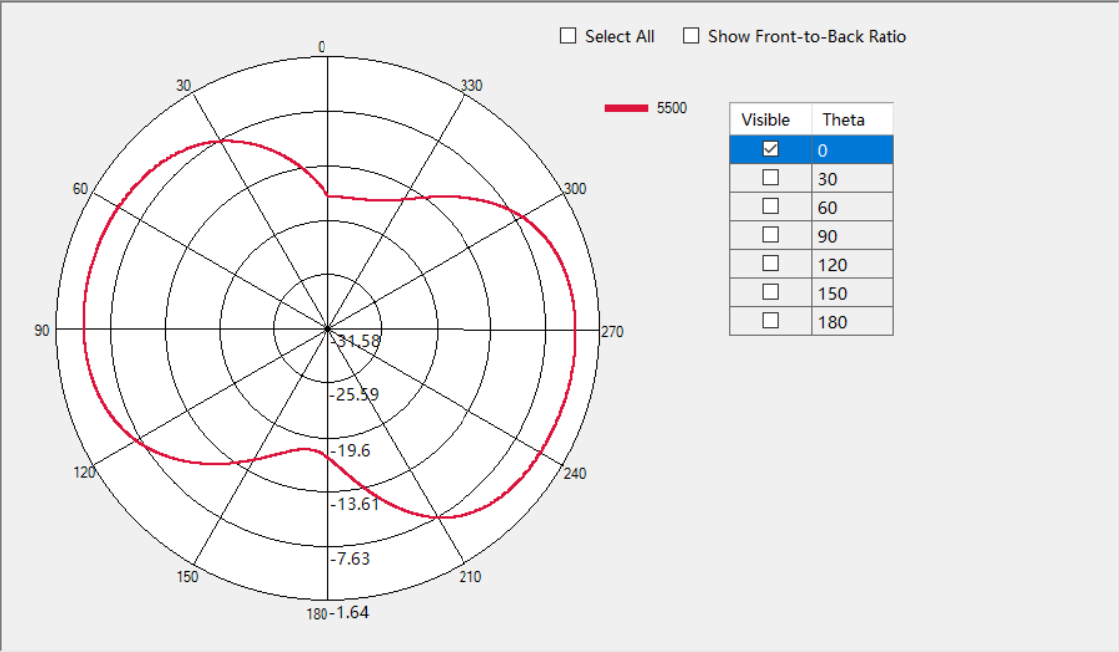

5G Phi=0deg


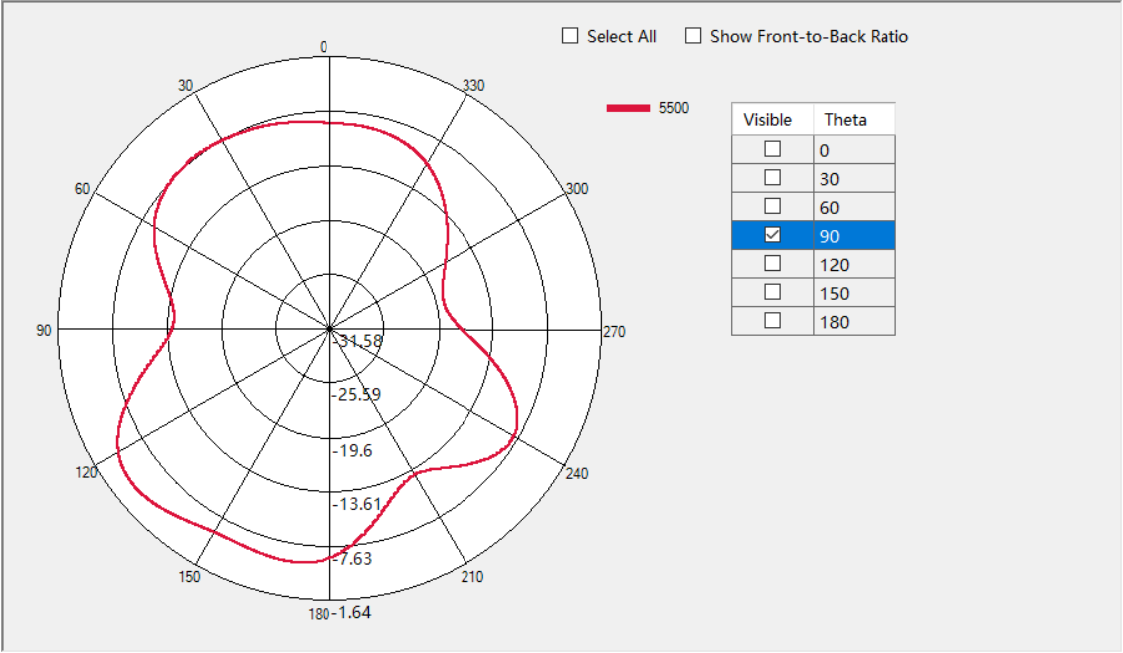


5G Phi=90deg

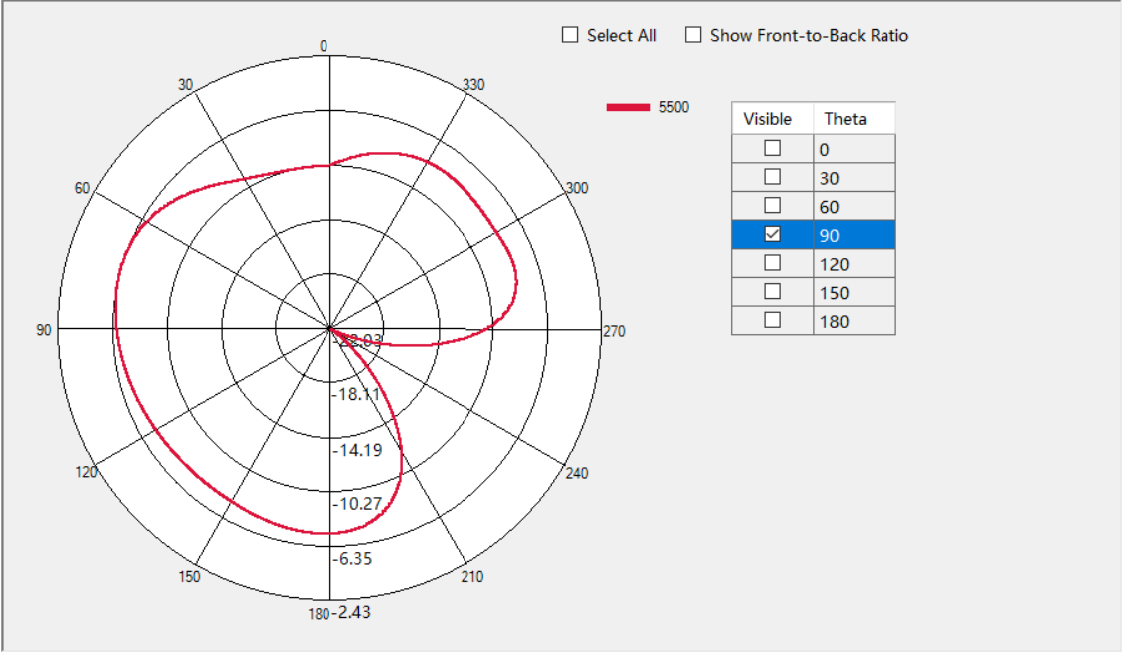

5G Theta=90deg

Antenna Photo:

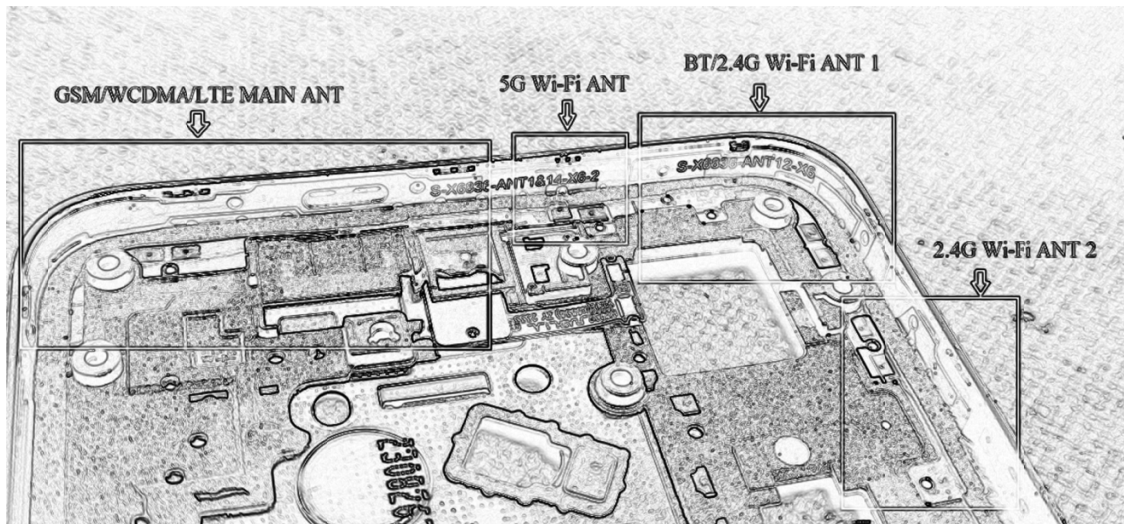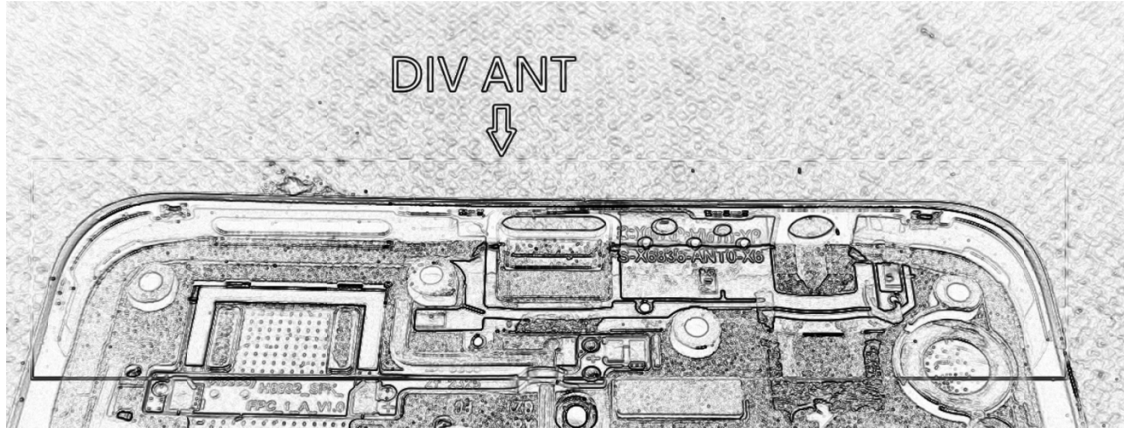

PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
			DATE:	2023/07/025