


Manufacturer: GUANGDONG SHIJI TECHNOLOGY CO., LTD

Address: NO. 8, ROAD 5, DACHEWEI AREA, YONGXIN INDUSTRIAL ZONE, LIANSHANG TOWN, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

PCB Antenna for BLE Chips of WCH

1、 Dimension of Antenna

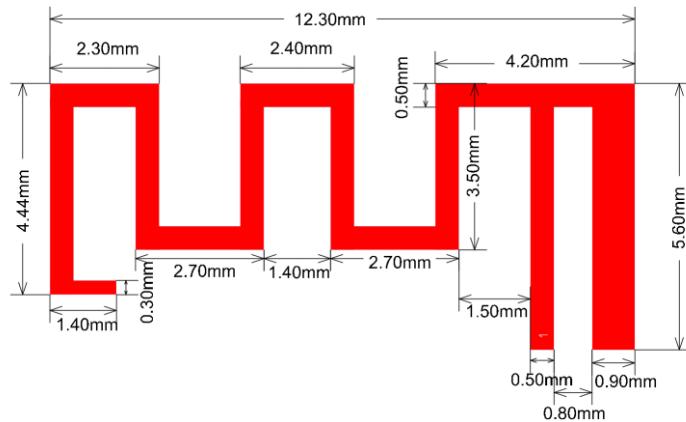


2. Features

- Dimension: 5.6*12.3mm
- Terminal impedance: 50 ohm
- Max Gain: 2.1dBi
- RF Frequency: 2.4GHz

3、S parameter

Working bandwidth: 157MHz


S11: -43.5dB@2.44GHz

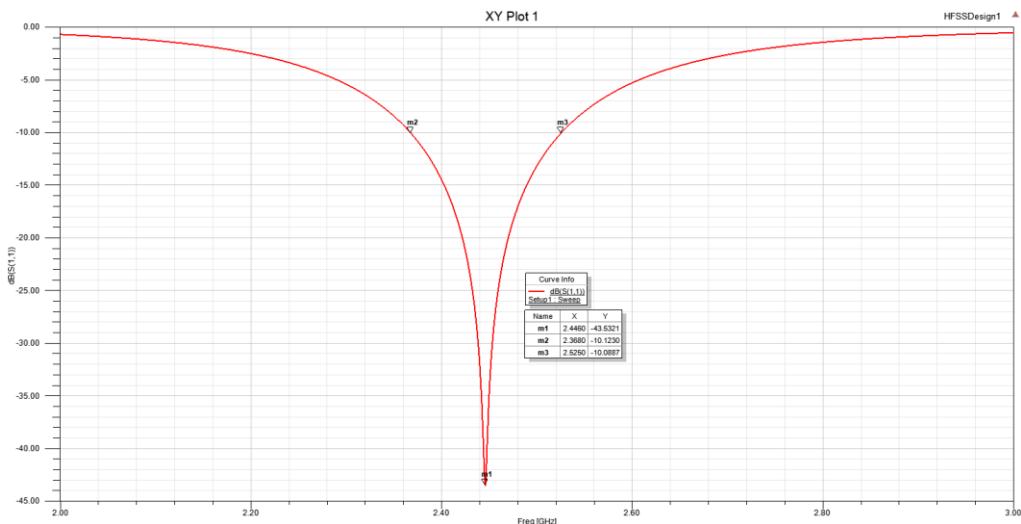


4、Gain and Radiation pattern

Max gain @2.4GHz: 2.08dBi

E plane:

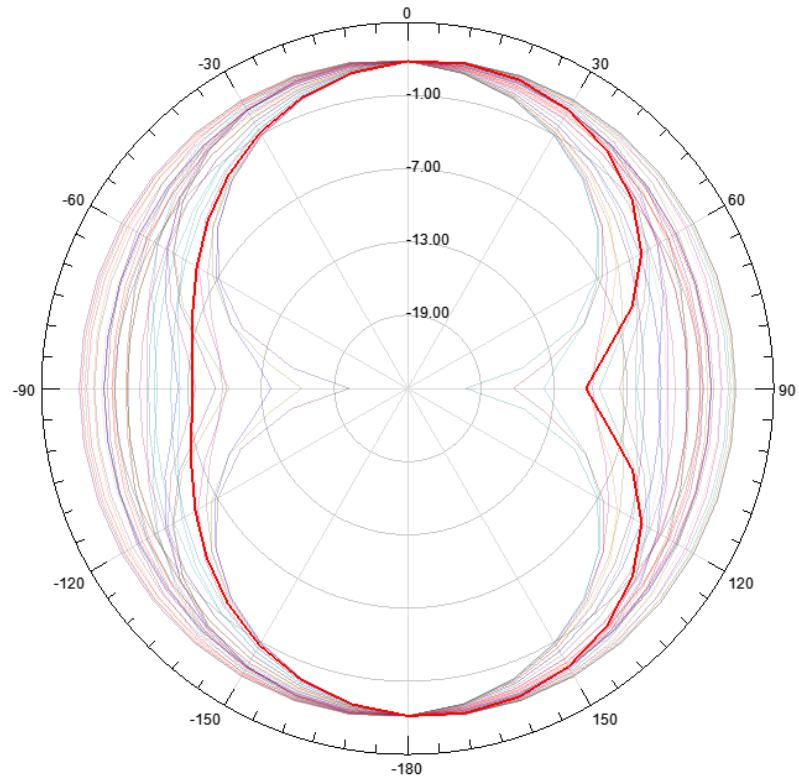


H plane:

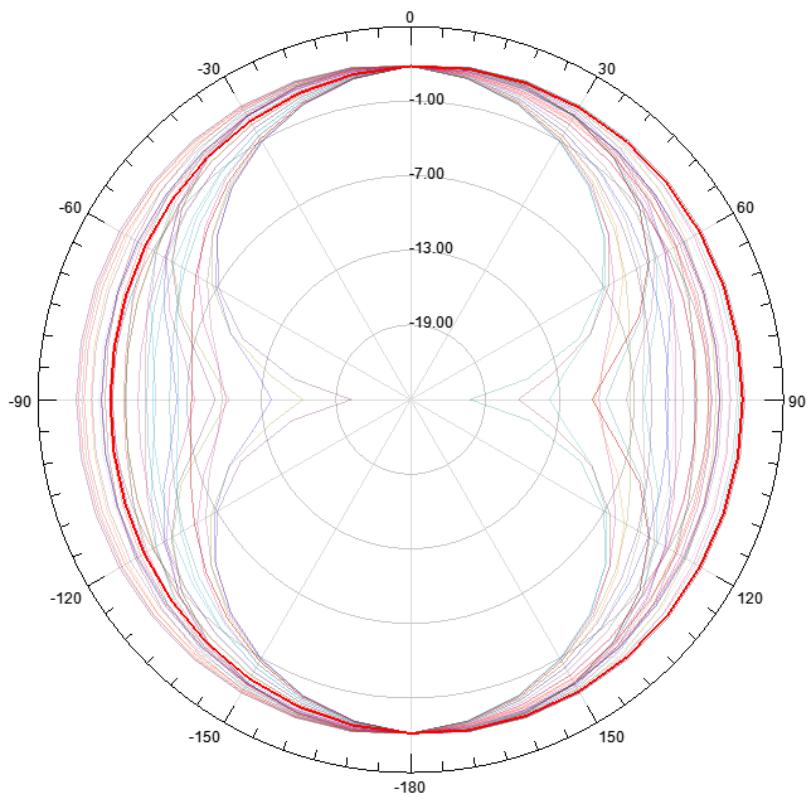


Max Gain @2.44GHz: 2.1dBi

E plane:

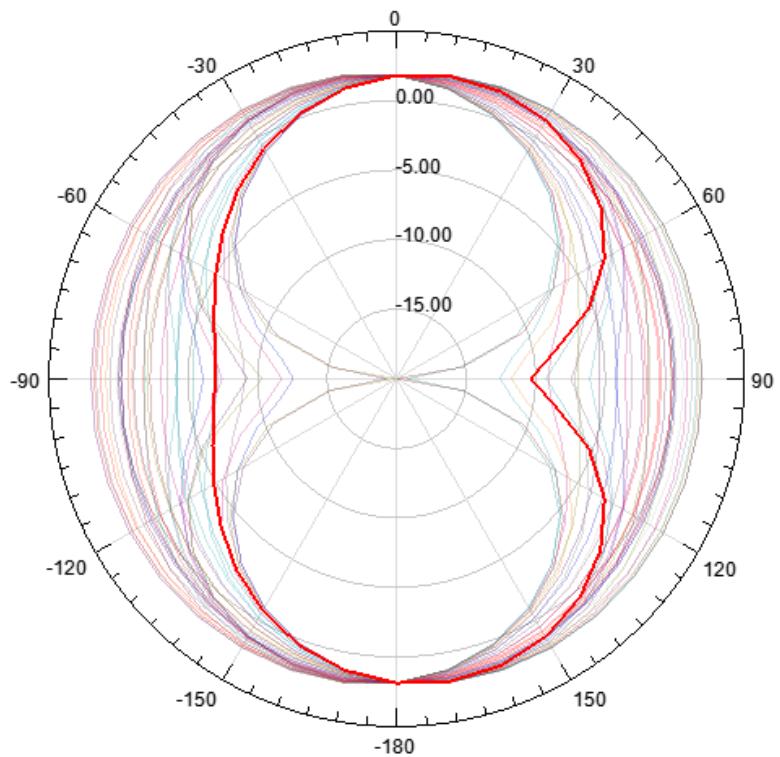


H plane:

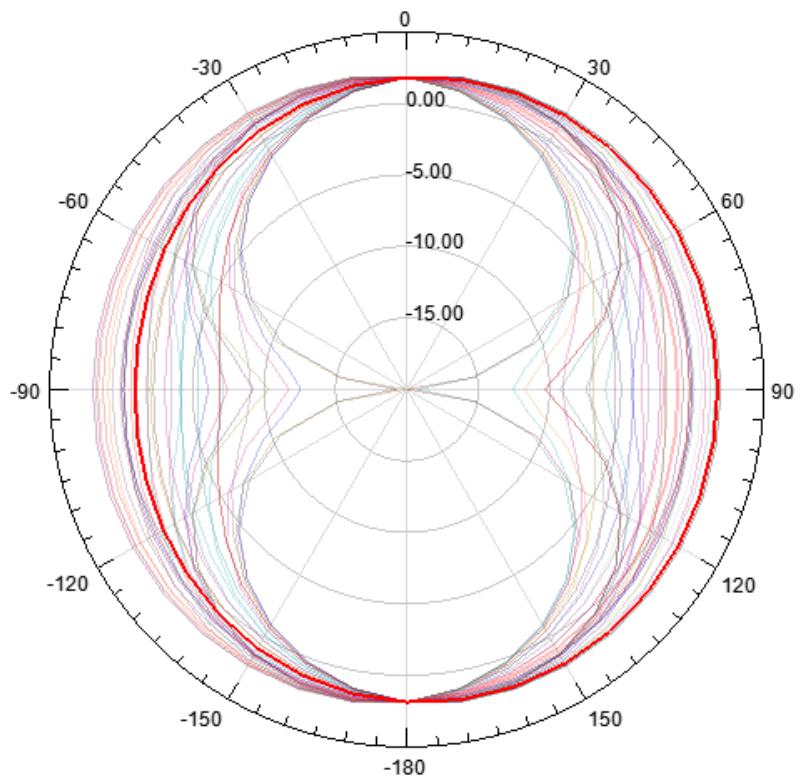

Max Gain @2.48GHz: 2.04dBi

E plane:

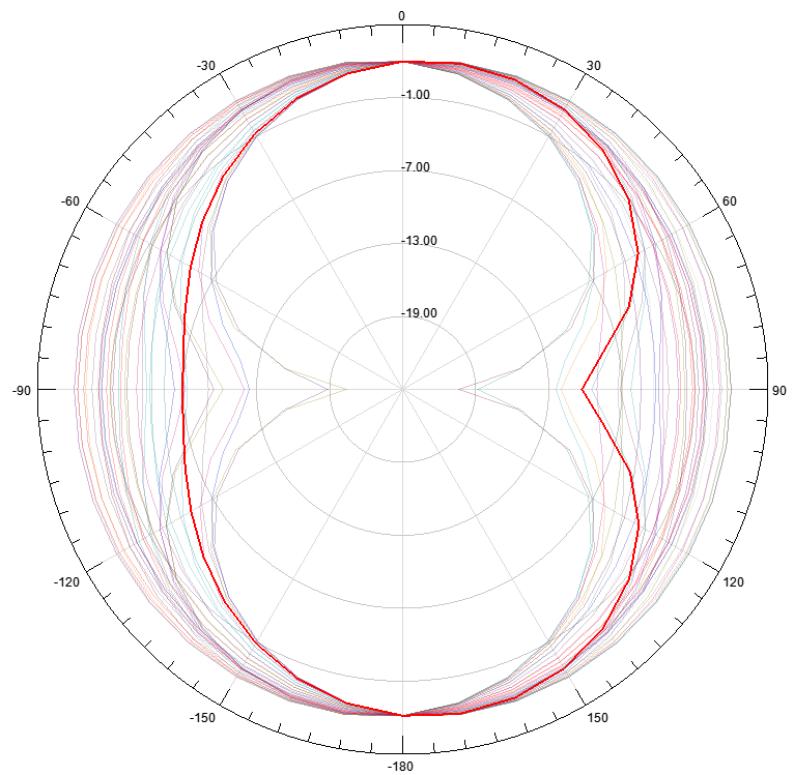

H plane:

