

Shenzhen Surbaner Technology CO.,LTD.

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name	熵基						
客户项目名 Customer Project N ame	Zface12000	盛邦尔料号 Surbaner P/N 3160-180-00855					
客户编码 Customer P/N	/	工作频段 Working Band					
产品描述 Description	射频线:1.13黑色线/两头1代端子/L=125MM(土3mm)						
版本号 Version	V01						
	设计人信息/Designer	r Information					
射频工程师 RF Engineer	林德友 研发主管 朱浩奎						
结构工程师 ME Engineer	蔡杰						

盛邦尔审批/Surbaner Approval				客户批准/Cust	tomer Approval
	制作 Prepared By	审核 Checked By	批准 Approval By	审核 Checked By	批准 Approval By
签章 Signature	曾心荥	林庵丛	#317	I	
日期 Date	2024. 1. 27	W 1971 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1/29		

修订履历/Change Log							
修订内容	责任人	核准	日期 Date				
onango bosor rperon	Torson in onargo	Approvat by	Date				
		修订内容 责任人	修订内容 责任人 核准				

地址:深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

目录/Catalogue


	目录/Catalogue				
序号 No.	项目 Item	页码 Page No.			
1	图纸或实物图片 Drawing or Product Image	3			
2	技术参数 Technical Parameter	4			
3	射频性能测试报告 RF Performance Test Report	5-24			
4	尺寸测量报告 Dimensions Test Report	25			
5	可靠性测试报告 Reliability Test Report	26			

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

一. 产品图纸或实物图片/Drawing or Product Image

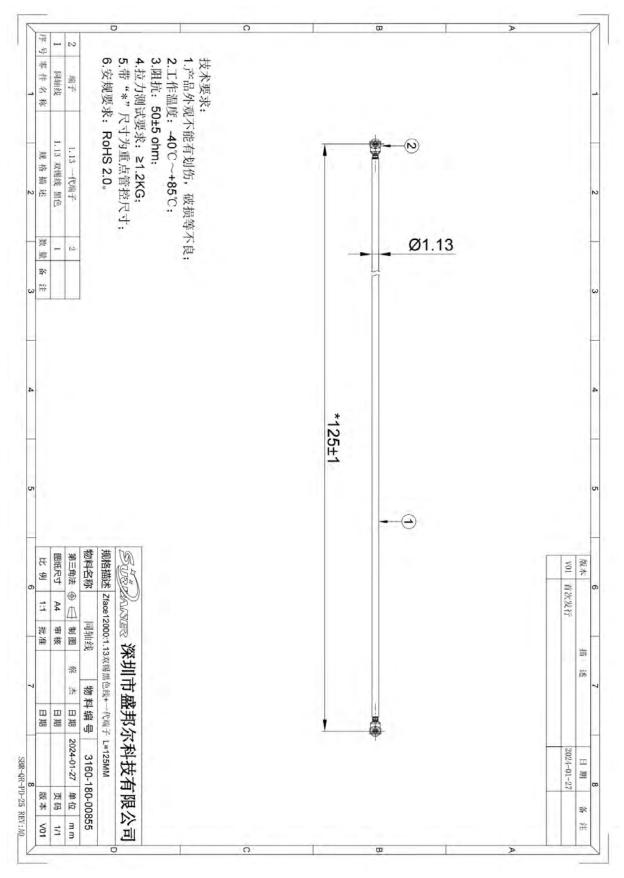

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

二. Technical Parameter /技术参数

1. Antenna/天线

No/序号	Part Name/项目	SPEC/规格
1	Frequency Range/ 频率范围	2400-2500MHz
2	Impendence/阻抗	50 ohm nominal
3	Gain/增益	5.36dBi(at2428MHz)MAX
4	Polarization/极化	LINE
5	VSWR/驻波比	≤2.0
6	Efficiency/效率	≥20%AVG
7	RF Cable/射频连接线	1.13 黑色线 125mm
8	RF Connector/连接器	1代端子

2. Environmental Characteristics/环境特性

No/序号	Part Name/项目	SPEC/规格
1	Operation Humidity /工作湿度	5~95%不冷凝
2	Operating Temperature/ 工作温度	-20~+60℃
3	Store Temperatuer/工作储存温度	-30~+70℃
4	Salt Spray Test/ 盐雾试验	24H

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

射频性能测量报告

RF Performance Test Report


客户名称 Customer Name	熵基	项目名称 Project Name	Zface12000	盛邦尔料号 Surbaner P/N	3160-180-00855
频段	2400-2500MHz	测试日期	2024/1/26	测试人	林德友
Band	2400-2500MIT2	Test Date	2024/ 1/ 20	Inspector	

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪;辐射特性利用 Satimo 三维近场暗室进行测试,并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下:

Test of antenna input characteristics using **Agilent E5071C and Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

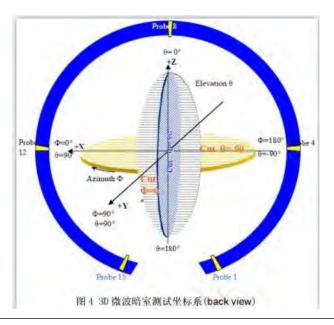

1. S11 参数测量/S11 Parameter-VSWR

使用一根 50 Ω 同轴电缆连接到天线, 然后该电缆连接到网络分析仪测量 S11 参数, 被测量产品远离 金属至少 20 厘米。

Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.



Shenzhen Surbaner Technology CO.,LTD.

Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C










2. 天线匹配网络/Antenna Matching Network

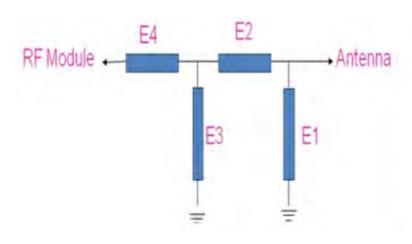

Element	Value
E1	N/A
E2	N/A
E3	N/A
E4	N/A

PCB板端匹配电路没有改动




Shenzhen Surbaner Technology CO.,LTD.

Gain & Efficiency


Frequency(MHz)	Efficiency/dB	Efficiency/%	MaxGain/dBi	AvgGain/dBi
2400	− 5. 15	30. 55	1. 02	− 5. 15
2407. 14	-4. 67	34. 12	1. 43	-4. 67
2414. 28	-5. 23	29. 99	0. 99	-5. 23
2421. 42	-4. 8	33. 11	1. 46	-4. 8
2428. 56	-5. 36	29. 11	1. 02	-5. 36
2435. 7	-4. 96	31. 92	1. 55	-4. 96
2442. 84	− 5. 14	30. 62	1. 6	− 5. 14
2449. 98	-5. 34	29. 24	1. 58	-5. 34
2457. 12	-4. 97	31. 84	2. 17	-4. 97
2464. 26	-5. 34	29. 24	1. 9	-5. 34
2471. 4	-4. 72	33. 73	2. 57	-4. 72
2478. 54	-4. 88	32. 51	2. 46	-4. 88
2485. 68	-4. 6	34. 67	2. 68	-4. 6
2492. 82	− 4. 55	35. 08	2. 7	− 4. 55
2499. 96	-4. 67	34. 12	2. 61	-4. 67

Efficiency

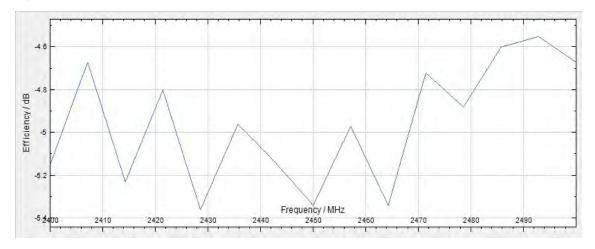





Shenzhen Surbaner Technology CO.,LTD.

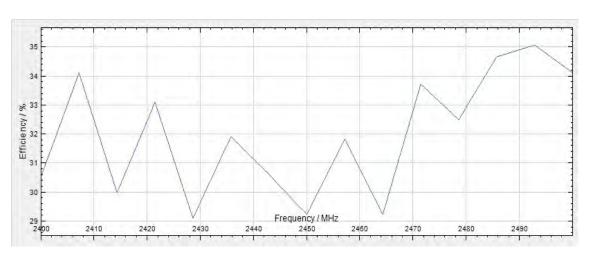

Gain

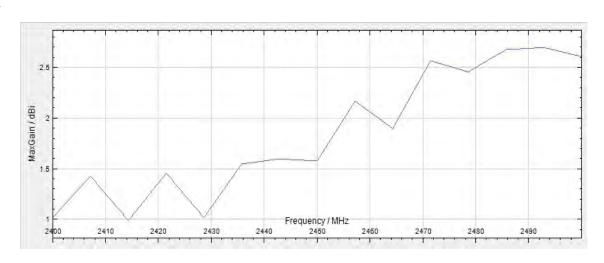


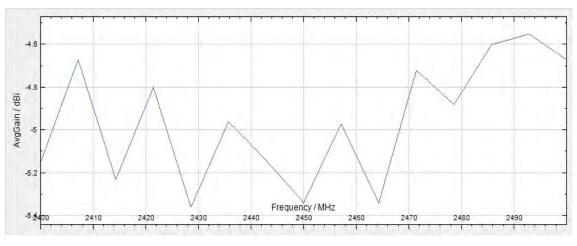




Shenzhen Surbaner Technology CO.,LTD.

2D Pattern

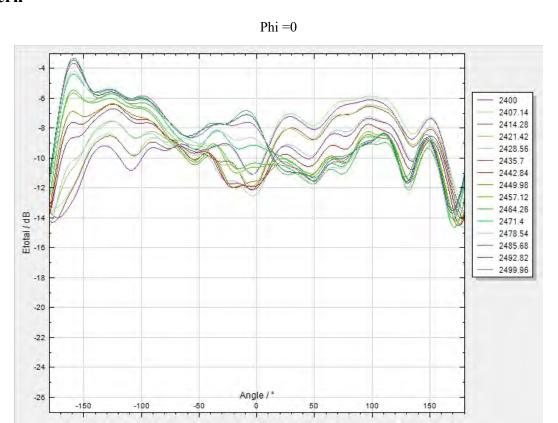


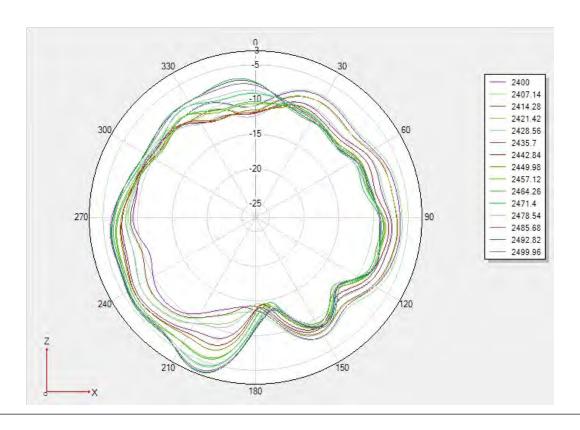


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

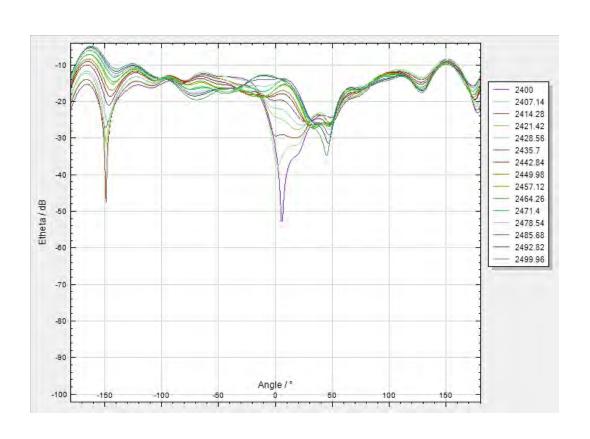


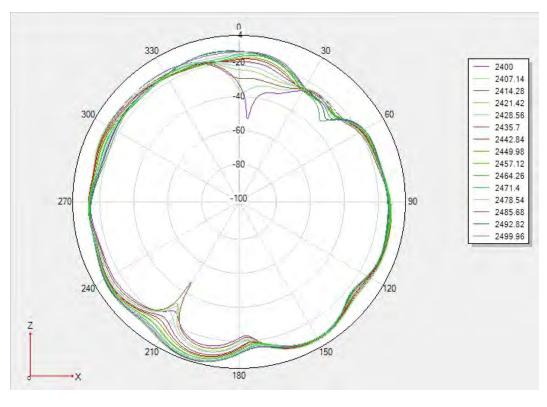


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

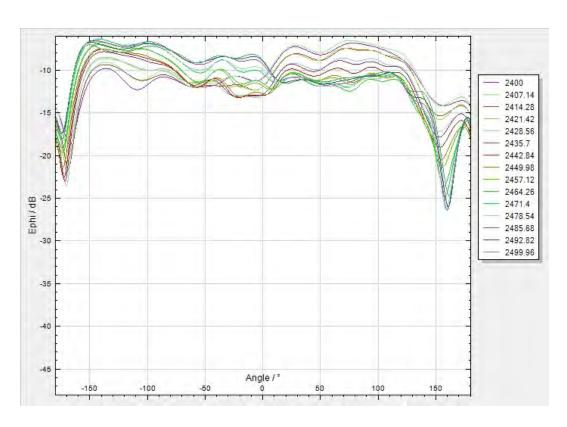


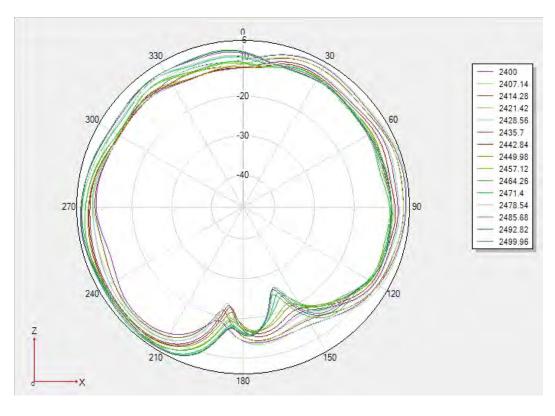


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

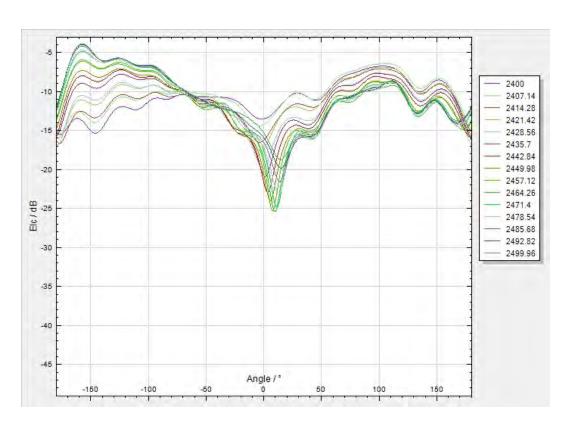


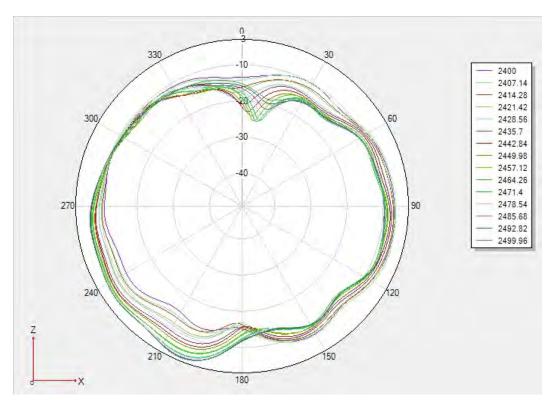


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

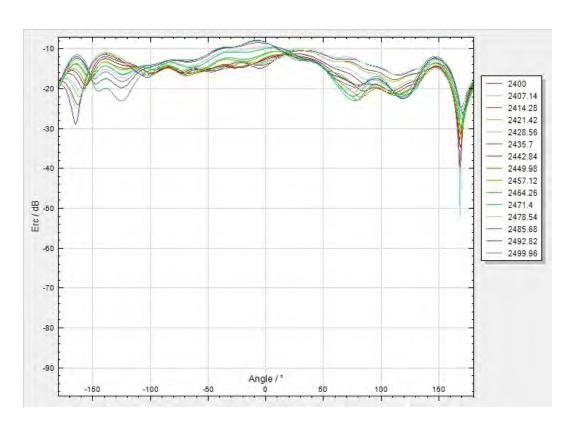


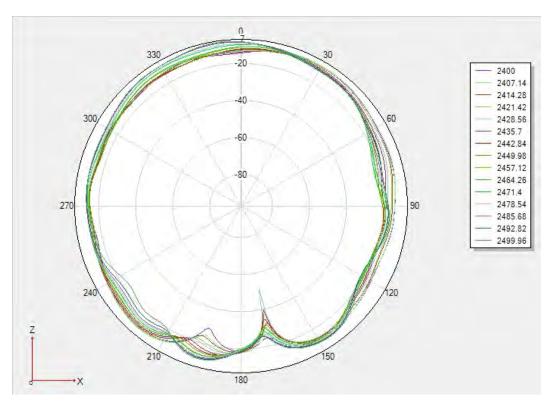


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

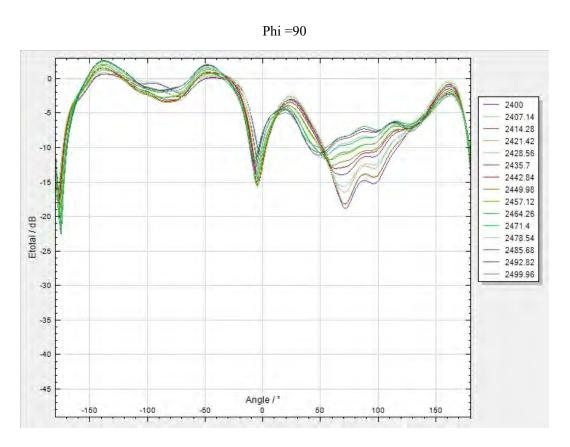


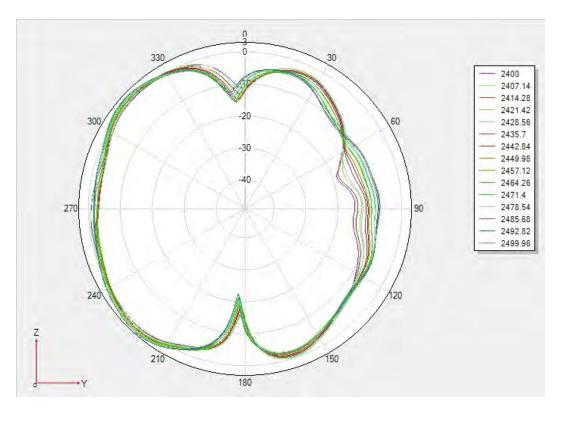


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

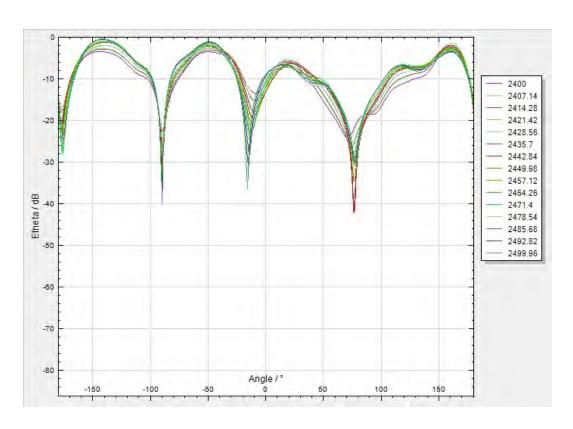


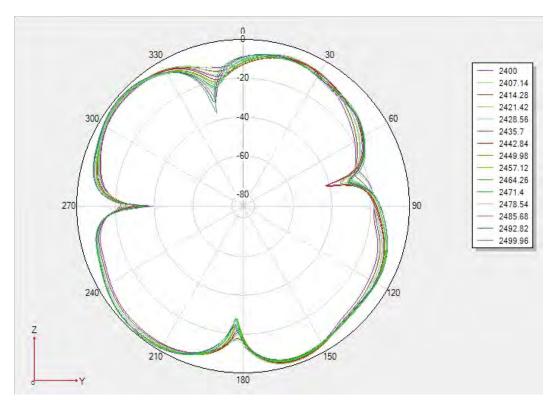


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

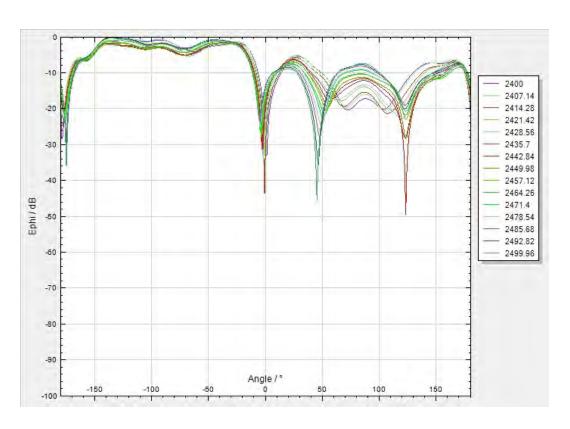


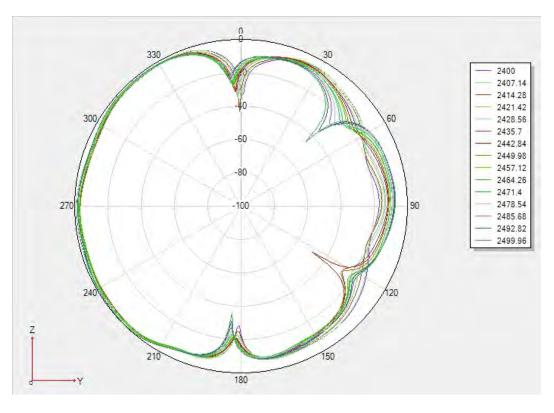


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

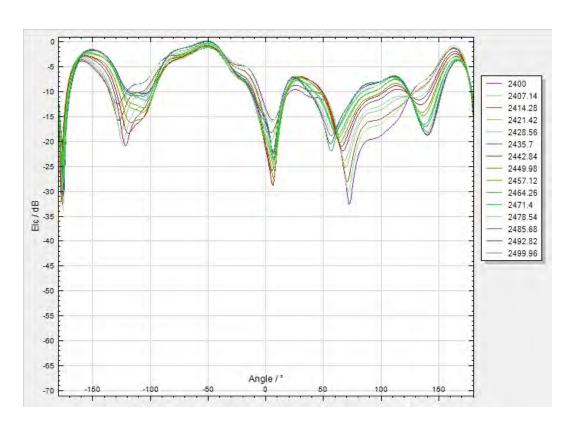


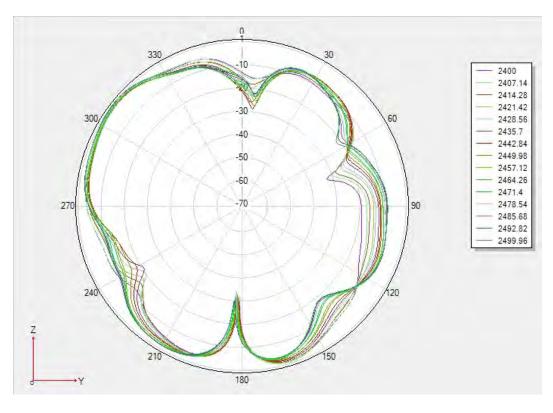


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

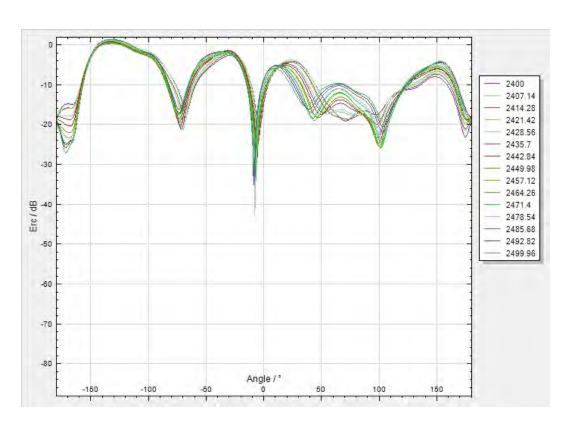


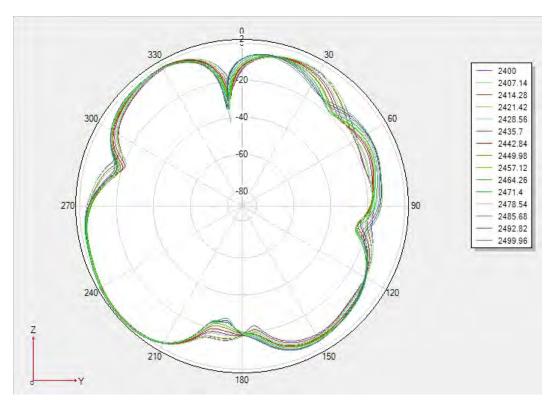


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

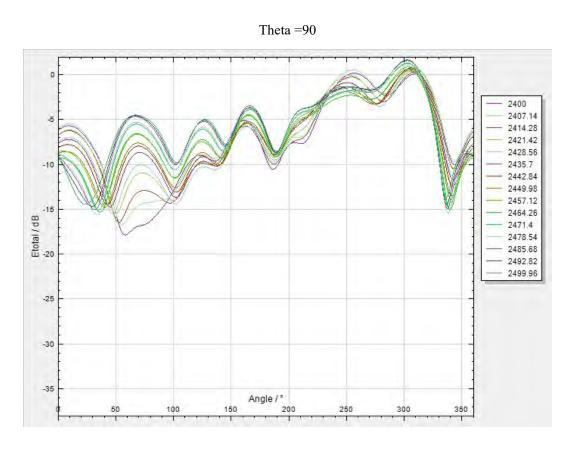


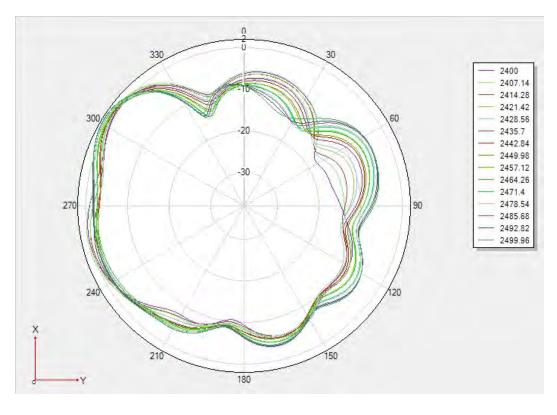


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

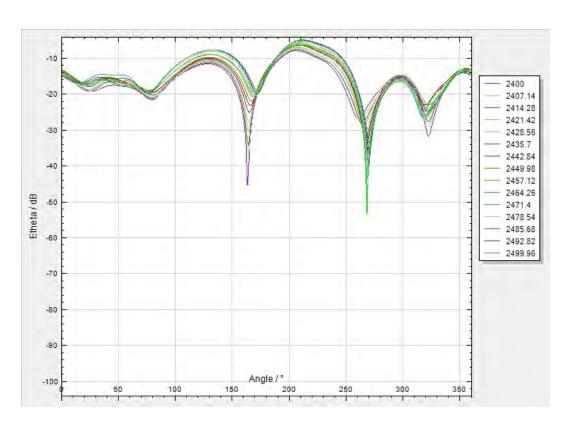


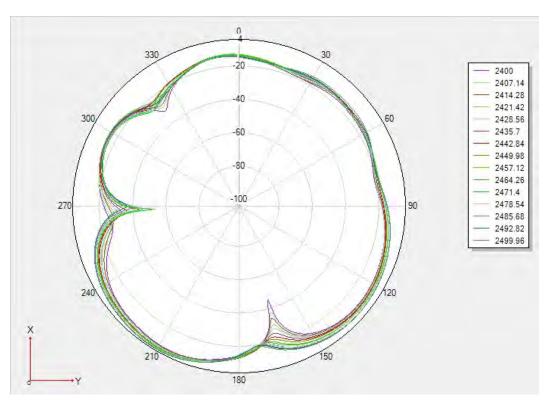


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

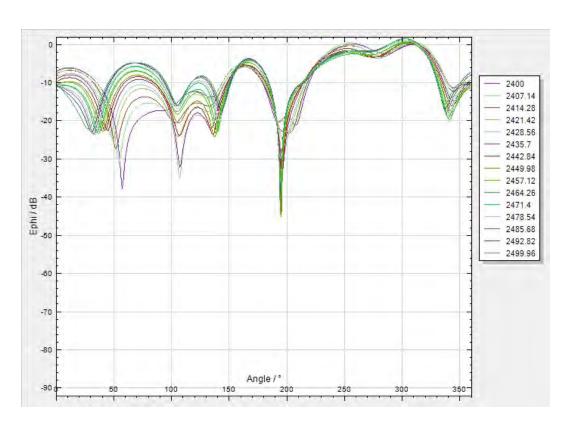


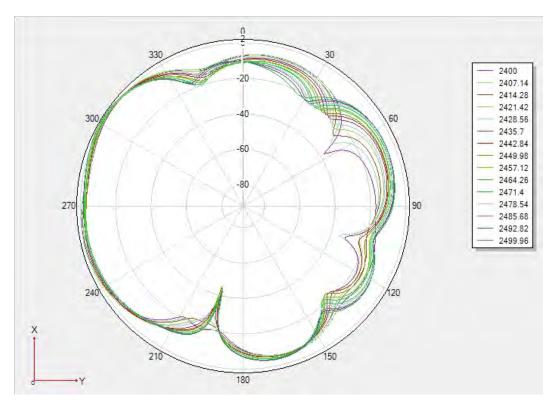


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

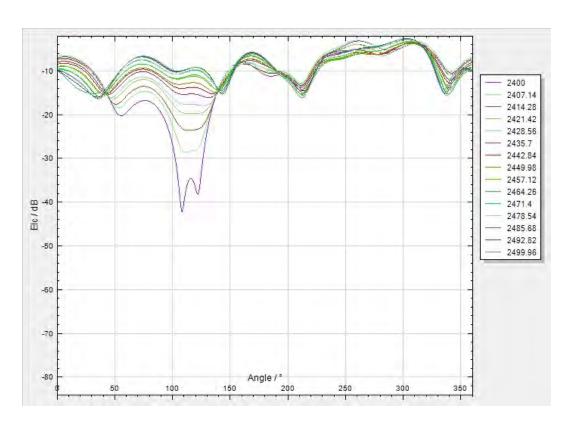


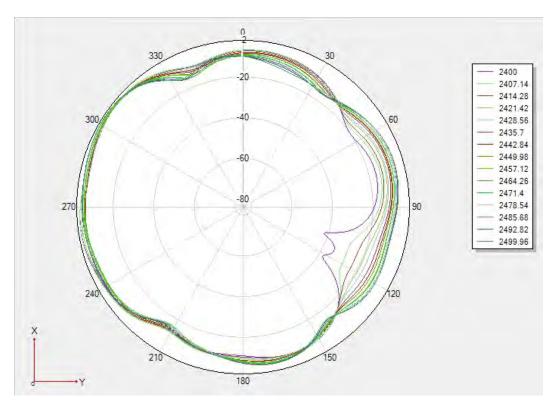


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

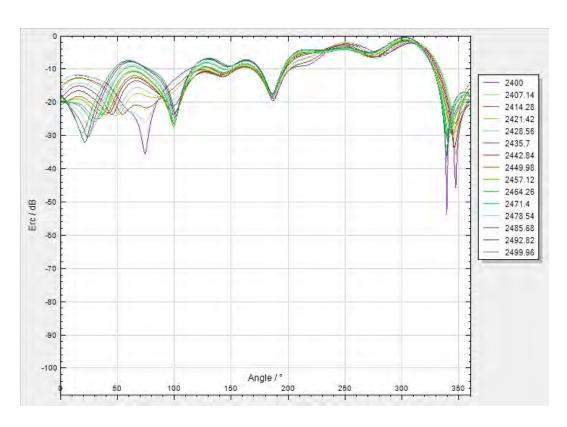

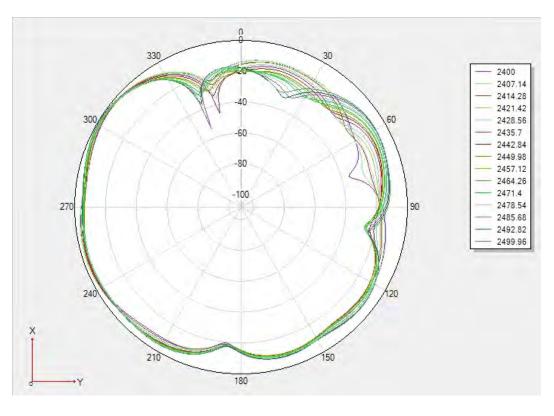


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726 Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

Product Overview & Environmental Treatment

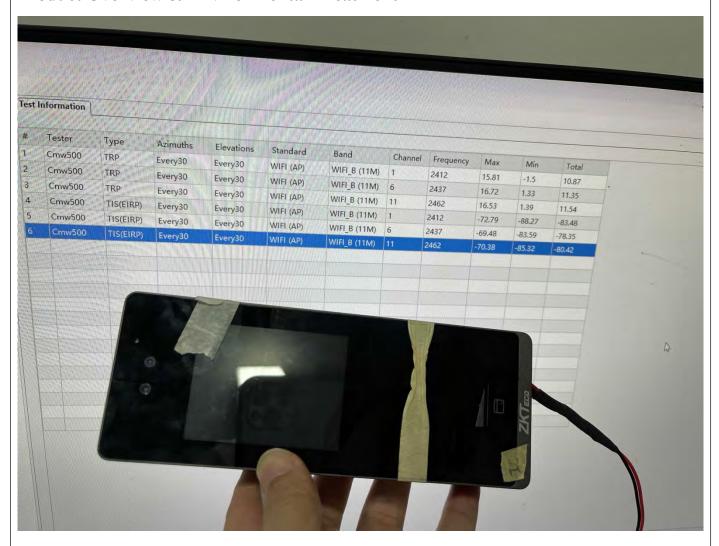



Shenzhen Surbaner Technology CO.,LTD.

样品尺寸测量报告

Sample Dimensions Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	*****	盛邦尔料号 Surbaner P/N	3160-180-00855
测试日期 Test Date	2024/01/26	样品数量 Sample Qty.	3	测试人 Inspector	曾心荣
尺寸编号 Dimension No.	标准 Standard	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	Pass/NG
①线长	125±1mm	125	126	125	Pass
		最终结论 Conclusion	1		PASS
测试人&日期 Inspector & Date	曾心荣 2024/0′	1/26	批准&日期 Approval &D ate		



Shenzhen Surbaner Technology CO.,LTD.

可靠性测试报告

Reliability Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	******	盛邦尔料号 Surbaner P/N	3160-18	0-00855
测试日期 Test Date	2024/01/26	样品数量 Sample Qty.	3	测试人 Inspector	何者	季辉
测试项目 Test Item	要求 Requirement	试验设备 testing equipment	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	判定 PASS/NG
高温存储	在+70℃条件下暴露 24H,恢复 2H 后进行测 试电气性能正常	恒温恒湿箱	ОК	ОК	ОК	Pass
低温存储	在-30℃条件下暴露 24H,恢复 2H 后进行测 试电气性能正常	恒温恒湿箱	ОК	ОК	ОК	Pass
高温工作	在+60°C条件下通电工作 24H 电气性能正常	恒温恒湿箱	ОК	ОК	ОК	Pass
低温工作	在-20°C条件下通电工 作 24H 电气性能正常	恒温恒湿箱	ОК	ОК	ОК	Pass
端子 盐雾试验	(5 ± 0. 5)%氯化钠、 pH 值为 6.5~7.2,实 验箱温度(35±2)℃ ☑24H □48H	盐雾试验机	ОК	ОК	ОК	Pass
端子铆压 拉拔力	1.13 线接 1 代端子 ≥10N	推拉力计	11N	10N	11 N	Pass
	最终结论 Conclusion					
测试人& 日期 Inspector & Date	何春辉 2024/01/26		批准& 日 期 Approval &D ate			