

# QShare 20 说明书丝印文件

(折页排版, 单页A7尺寸, 铜版纸100g)

注意: 下列外圈方框只起到大小标注, 不丝印出来

**QOMO**  
**QShare 20**  
Wireless Receiver

**User Manual**



**Information to User**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Important:** Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**RF Exposure Statement**

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

**1. Product introduction**

QShare 20 is an innovative and powerful device designed to wirelessly receive video streams from your device and convert them into wired UVC video and HDMI video output. It supports QOMO's QD5000, QPC80H3, QPC100W, and any future products that support wireless video streaming.


**Key features include:**

- 4K Ultra-High-Definition Video: Provides a clear, realistic, delicate, and vivid visual experience.
- Wireless Range: Provides fast, low-latency video playback at distances up to 40 ft.
- Ease of Use: Simple pairing and operation, suitable even for first-time users.
- Versatility: Ideal for home entertainment, business presentations, and education and training scenarios.

**2. Package Contents**

- a) QShare 20 x1
- b) HDMI Cable (0.5m) x1
- c) USB C to C Cable (0.5m) x1
- d) USB A to C Cable (0.5m) x1
- e) User Manual x1

**3. Product Details**

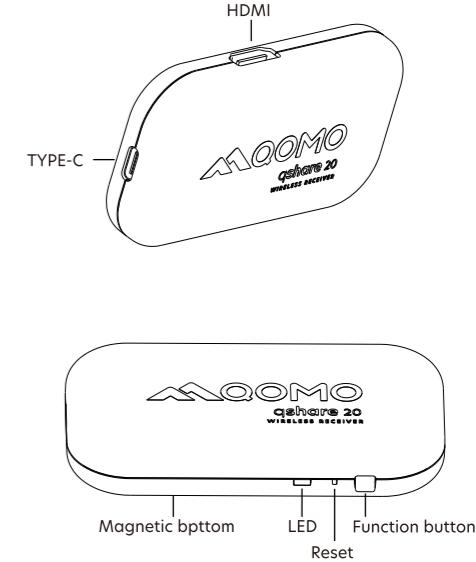

**4. Instructions for use**

**A. Pairing**

**1) Quick Pairing:**

- Place QShare 20 next to the document camera to be paired.
- Ensure the document camera is in AP mode and uses the default SSID and password.
- Power on QShare 20 via the TYPE-C port.
- When the LED is green, long press the pairing button for 10 seconds to enter pairing mode. The LED will change from blue to green, indicating successful pairing.

**B. Output by UVC video device**

- Connect QShare 20's TYPE-C port to any operating system using the USB C to A or USB C to C Cable.

**5. Troubleshooting**

- The indicator light does not turn on:
  - When outputting to an Interactive Display via HDMI, some large screens with a USB interface may not provide power when there is no signal access. Please connect the USB power supply to an interface that can deliver power.

**6. Specification**

Model	QShare 20
Frequency Band	2.4Ghz,5Ghz
Transmission Technology	Wireless
Transmission Range	Best results within 40 ft
Image Quality	4K@30Hz/1080P@60Hz
Delay	As low as 260ms
Working Temperature	0°C~60°C
Working Voltage	5V
Working Current	0.5A
Interface Type	Standard HDMI and Type-c
Product Dimensions	90mm*50mm*16mm
Package Dimensions	124mm*84mm*64mm

**Note:** Specifications are subject to change without notice

**LED indicator status list:**

- Steady red: The device is starting.
- Blinking green: The device is being connected.
- Steady green: The device is connected and working properly.
- Blinking blue: The device is being paired.

**Function button:**

- Hold down for 10 seconds: Enter quick pairing mode.
- Short press: Switch HDMI output resolution.

**4. Instructions for use**

**A. Pairing**

**1) Quick Pairing:**

- Place QShare 20 next to the document camera to be paired.
- Ensure the document camera is in AP mode and uses the default SSID and password.
- Power on QShare 20 via the TYPE-C port.
- When the LED is green, long press the pairing button for 10 seconds to enter pairing mode. The LED will change from blue to green, indicating successful pairing.

**B. Output by UVC video device**

- Connect QShare 20's TYPE-C port to any operating system using the USB C to A or USB C to C Cable.

**5. Troubleshooting**

- The indicator light does not turn on:
  - When outputting to an Interactive Display via HDMI, some large screens with a USB interface may not provide power when there is no signal access. Please connect the USB power supply to an interface that can deliver power.

**6. Specification**

Model	QShare 20
Frequency Band	2.4Ghz,5Ghz
Transmission Technology	Wireless
Transmission Range	Best results within 40 ft
Image Quality	4K@30Hz/1080P@60Hz
Delay	As low as 260ms
Working Temperature	0°C~60°C
Working Voltage	5V
Working Current	0.5A
Interface Type	Standard HDMI and Type-c
Product Dimensions	90mm*50mm*16mm
Package Dimensions	124mm*84mm*64mm

**Note:** Specifications are subject to change without notice