

BESTCOMM®

Btesla


USER MANUAL

Model No.: Btesla

Btesla is a V 4.1 Bluetooth Stereo earbuds supporting True Wireless Stereo, Voice Prompts in English.

OVERVIEW OF Btesla

- (1) LED Light
- (2) Charging Contact Points
- (3) Microphone
- (4) MF Button (Multifunction Button)
 - On / Off
 - Play / Pause Music
 - Answer / Reject the Call
 - Transfer the Call
 - Redial
 - Next/Previous Songs
- (5) Speaker

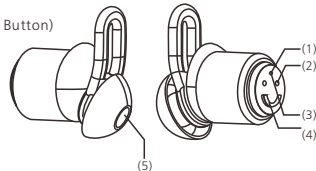


INTRODUCTION

Thank you for purchasing Btesla Bluetooth True Wireless Stereo earbuds. This manual will help you to accurately operate Btesla, but you should familiarize yourself with the Bluetooth function of your mobile phone or other devices before using the Bluetooth earbuds Btesla.

CHARGING THE BATTERY

Btesla come with the charging contact points on the earbuds body and the Power Box for storage and charging.

1. Put the Btesla into the charging slots of the Power Box individually.
2. The red indicator light will be on when charging.
3. When the battery is fully charged, the red LED light turns off.

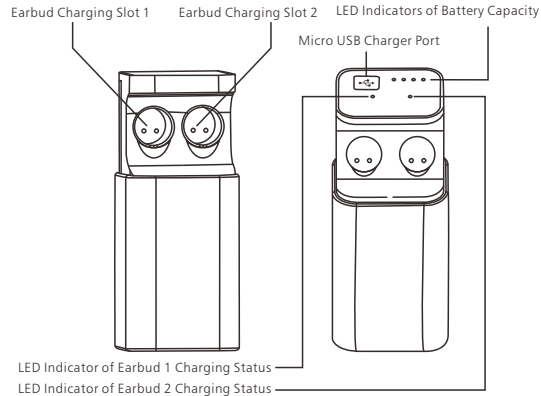

CHARGING THE POWER BOX

The Power Box is with Built-in 800mAh battery capacity. It Provides almost 4-8 additional charges for 2 earbuds. The LED Indicators of Battery Capacity on the Power Box shows the remaining battery capacity. Please charge the Power Box when it is running out of power.

1. Plug one end of the USB charging cable into the charging port of the Power Box, and Put the other end into your computer or AC charger with USB port.
2. When the Power Box is fully charged, 4 LED Indicators of Battery Capacity will be turned on in solid white.


LED Indicators of Battery Capacity (During Charging the Earbuds & Being Charged)

Battery Capacity	LED 1	LED 2	LED 3	LED 4
0-25%	Flashing	Off	Off	Off
25%-50%	On	Flashing	Off	Off
50%-75%	On	On	Flashing	Off
75%-99%	On	On	On	Flashing
99%-100%	On	On	On	On

WHEN THE BATTERY IS LOW

You will hear the voice prompt "Battery Low". At this time, please charge up Btesla.

You can also refer to the Battery Meter on iPhone and other iOS devices.

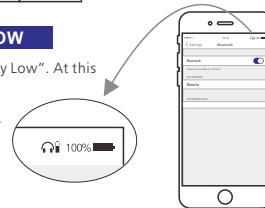

CONNECTING WITH A PC

You can connect Btesla with the Bluetooth enabled PC. Please refer to the user manual of your Bluetooth enabled PC for setup information.

FACTORY RESET

To restore the earbuds to factory setting, you will have to turn on the earbud individually and when no connection with bluetooth device, Click on three the multifunction button.

When the LED Light in red and blue at the same time flashing, the factory reset is successful.

GUARANTEE

Btesla is a registered trademark of be-half, Inc. Other brands and product names are trademarks of their respective owners. Btesla warrants this product against all defects in material and workmanship for a period of twelve (12) months from the date of original purchase of the product. The conditions of this guarantee and the extent of responsibility of Btesla.

WARNING

Permanent hearing loss may result from long-term exposure to sound at high volumes. Use as low volume as possible and avoid prolonged use of the earbuds at excessive sound pressure levels. Please read the below safety guidelines prior to using the product.

(Prior to using this product)

1. Before putting on the earbuds, turn the volume to its lowest level.
2. Put the earbuds on, and then slowly adjust the volume to a comfortable level.

IMPORTANT

- For the first use, please make sure to fully charge the Btesla before hand.
- You must recharge Btesla if it has been not used for more than 6 months.
- You must use the authorized charger to charge up Btesla.

MULTIFUNCTION BUTTON

Answering/Ending/Rejecting/Redialing/Transferring calls; Playing/Pausing the Music; Factory Reset; Pairing.

TURNING THE EARBUDS ON/OFF

To turn on Btesla:

Press and hold the MF Button for about 3.5 seconds to turn on Btesla.

To turn off Btesla:


Press and hold the MF Button for about 4 seconds to turn off Btesla.

NOTE:

When the 2 earbuds are in sync mode, if you turn off one earbud, the another connected earbud will be turned off automatically along with the Voice Prompt "Power Off".

USE Btesla GEMINI IN PAIR

STEP 1. In-sync wireless stereo connection with mobile phone

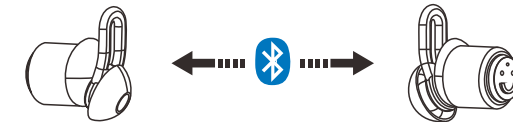

(During the use of this product)

1. Keep the volume at the lowest level as possible.
2. If it is necessary to increase the volume, adjust the volume control slowly.
3. If you experience discomfort or ringing in your ears, immediately discontinue using the earbuds. With continued use at high volume, your ears may become accustomed to the sound level, which may result in permanent damage to your hearing without any noticeable discomfort.

SAFETY INFORMATION!

1. If you have a cardiac pacemaker or other electronic medical equipment, you should consult your physician before using this product.
2. This product contains small parts that may be hazardous to children. Keep out of the reach of children. The bags themselves or the many small parts they contain may cause choking if ingested.
3. Never attempt to disassemble the product yourself, or push other objects into this product, as this may cause short circuit, which led to the fire or get an electric shock.
4. None of the components can be replaced or repaired by users. Only authorized dealer or service center may open the product.
5. If any parts of your product require replacement for any reason, including normal wear and tear or breakage, please contact your dealer.
6. If the product overheats, has been dropped or damaged or has been dropped in a liquid, discontinue to use.

REMEMBER

Be sure to ensure safe driving, avoid distractions and follow local laws.

- 1) Press and hold the MF button for about 3.5 seconds of two earbuds, the LED lights flash in red, then, 2 earbuds are turned on and connected automatically.
- 2) The LED Lights of main earbuds (Right channel) flash in red & blue, then, it turns into pairing mode with mobile phone.

STEP 2. Connecting with Mobile Phone or Other Bluetooth Devices.



- 1) Turn on the Bluetooth function of your mobile phone or other Bluetooth devices, start searching for the Bluetooth devices on your mobile phone. Select "Btesla" to complete the connection.
- 2) If your phone asks for passkey or PIN-code, confirm with "0000" (4-zero).
- 3) When the mobile phone and the Right Channel of Btesla are connected, the Left Channel of Btesla will be connected with them automatically.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE:

- 1) When Btesla are in in-sync mode, they doesn't support Multipoint for 2 phones connection. That means you can only pair and connect Btesla with 1 mobile phone if they are used in pair.
- 2) When the Left Channel earbud is out of power, the Right Channel earbud will be turned off automatically even if it still has the battery life remaining. If the Right Channel earbud has been paired and connected with your mobile phone before, you can turn on the Right Channel earbud again and it will be connected with your mobile phone automatically.
- 3) When the Right Channel earbud is out of power, the Left Channel earbud will be turned off even if it still has the battery life remaining, When you turn on the Left Channel earbud again, it will be connected with the mobile phone automatically.

USE Btesla INDIVIDUALLY

You may need to pair and connect Btesla with your mobile phone or other Bluetooth devices again if you want to use the earbud individually.

1. How To Pair And Connect With The 1st Mobile Phone.

- 1) Press and hold the MF button for about 5 seconds to turn on the earbud, the LED lights flash in red & blue, then go into pairing mode.
- 2) Turn on the Bluetooth function of your mobile phone or other Bluetooth devices, start searching for the Bluetooth devices on your mobile phone. Select "Btesla" and follow the instruction. If your phone asks for passkey or PIN-code, confirm with "0000" (4-zero).
- 3) When Btesla and your mobile phone are paired and connected, you will hear the voice prompt-Second device connected.

NOTE:

If no pairing is possible for a period of time (approximately 5 minutes), the earbud will be turned off automatically.

2. How to pair and connect with the 2nd mobile phone.

Btesla supports multipoint technology for 2 phones connection when it is used individually.

- 1) Pair and connect Btesla with the 1st mobile phone. (Please refer to the "1. How to pair and connect with the 1st mobile phone.")
- 2) Turn off Btesla.
- 3) Turn off the Bluetooth function of the 1st mobile phone.
- 4) Turn on Btesla, pair and connect the earbud with the 2nd mobile phone.
- 5) Turn off Btesla once the connection completed, and turn on again.
- 6) Turn on the Bluetooth function of the 1st mobile phone, the earbud will be connected with both mobile phones automatically.

MAKING CALLS

Once Btesla are successfully connected to your mobile phone, you can use them to make and receive calls. Please consult your mobile phone's manual for more information.

1. Dial By The Phone Keys
Enter and dial the number on your mobile phone as you normally do. Once the call has been set up, the sound will be transmitted to your Btesla automatically.
2. Redial
Double click MF Button to redial the last number you called.

ANSWERING/ENDING/REJECTING CALLS

When Btesla are turned on, and there is an incoming call, you will hear a musical tone.

- Press MF Button to answer the call.
- Press MF Button to end the call.
- Long press MF Button for 3 seconds to reject the call.

TRANSFERRING CALLS

During both incoming call and outgoing call state, you can double click MF Button to transfer the call to the mobile phone. If you want to transfer the call back to Btesla, double click MF Button again. More procedures may be involved for some mobile Phones.

ADJUSTING THE VOLUME

To make sure Btesla can be so mini and lightweight, we removed the volume buttons from the earbuds. You will need to increase/decrease the volume through your mobile phone or other Bluetooth devices.

PLAYING/PAUSING MUSIC

Playing Music: Short Press the MF button.
Pausing Music: Short press the MF button.

NEXT/PREVIOUS SONGS

Next songs: Click on twice the MF button.
Previous songs: Click on three the MF button.

NOTE:

As there is no room to contain the tracking buttons on the earbuds, please track the songs through your mobile phone or other Bluetooth devices.